




Dagartech

400/230V 50Hz

HONDA GX 390


DGH 8 TF P

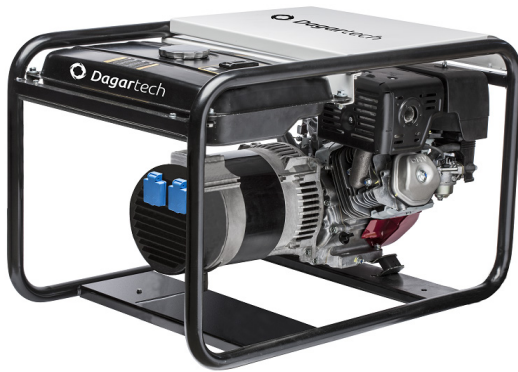

indicative image

Dimensions:

L : 910 mm
H : 570 mm
W : 550 mm



Weight:

80,5 kg

Hz 50 Hz

V 400/230 V

Air-cooled

Unleaded gasoline

3000 rpm

Static frame

CE Conformity

1 / General description

GENERAL TECHNICAL DATA	Engine	HONDA GX 390
	Alternator	MECCALTE T16F-160
	Frequency	50Hz
	Voltage	400/230 V
	Rated speed	3000 rpm
	Power factor	0,8
	Fuel tank capacity	15 l
	Starting system	Recoil (manual)

> Gasoline generator assembled on static/ fixed tubular frame .

POWER	PRP (kVA / kW)	7,5 kVA / 6 kW
--------------	----------------	----------------

Regulations

ENVIRONMENTAL CONDITIONS ISO 8528-1:2005 standard: 25°C, 100kPa and 30% relative humidity:

PRIME POWER (PRP): Electrical power data available at variable load for unlimited hours per year. A 10% overload is permissible for 1 hour every 12 hours according to ISO 8528-1:2005.

EMERGENCY STANDBY POWER (ESP): Electrical power data available at variable load in an emergency according to ISO 8528-1:2005.

The DAGARTECH genset has CE marking which includes the following directives:

- 2006/42 Machinery safety
- 2006/95/CE Electrical Safety
- 2004/95/CE Electromagnetic compatibility
- 2005/88/CE Noise emissions in the environment outdoors

- 2012/46/UE Measures against the emission of gaseous and particulate pollutants from internal combustion engines to be installed in non-road mobile machinery



2 / Engine specifications

> 4T OHV Air cooled gasoline engine.

Engine general data

Manufacturer / model	HONDA GX 390
Conitnuous power (3000 rpm)	6,4 kW
Net power(3600 rpm)	8,7 kW
Fuel	Unleaded gasoline
Number of cylindres	1
Cylinder capacity (cc)	390 cc
Compression ratio	8:1
Torque max. (Nm)	25,1 Nm (2500 rpm)
Cooling system	Air
Starting system	Recoil (manual)
Fuel tank capacity (l)	15 l
Consumption 100% load (l/h)	2,4 l/h
Consumption 75% load (l/h)	1,8 l/h
Autonomy 75% load (h)	8,3 h
Oil capacity (l)	1,1 l

3 / Alternator specifications

Datos Generales alternador

Manufacturer / model	MECC ALTE T16F-160
No. poles	2
Insulation class	H
IP protection	IP23
Voltage regulator	Capacitor regulation
PRP power 40°C (kVA)	7,5 kVA
No. phases	3
Power factor (cos φ)	0,8

> Alternator 2-poles, three-phase, capacitor regulation.

4 / Power sockets specifications

- > Schukko power socket 16A, 230V.
- > Socket 3P+N +Earth CEE, 16A, 400V.

5 / Optionals

- > Kit 1: Transportation (wheels)
- > Kit 2: electric control panel (power sockets included in panel)
 - 1x Schuko socket 16A, 230V, IP67
 - 1x 3P+N+T CEE socket, 16A, 400V, IP67
 - Interruptor diferencial 4P, 10A
 - Voltímetro y cuentahoras integrado
- > Kit 3: transportation + electric control panel

Dimensions (wheels included):

L : 910 mm
H : 750 mm
W : 650 mm

Weight

82,5 kg

