




ABOUT RUBI GROUP

	Introduction	0
0	MANUAL TILE CUTTING	
	Manual Tile CuttersScoring wheels and accessories for manual cutters	
	SLAB SYSTEM. Cutting and handling large-sized tile	
	Cutting large tile Handling large tile Installing large tile	
	ELECTRIC TILE CUTTING	
	Electric cutters and mitre saws	
\odot	DIAMOND BLADES	
	Dry cutting diamond blades Wet cutting diamond blades	
Δ	DRILLING	
	Tools for drilling ceramic tile, stoneware, marble, granite and other materials	13
	GRINDING & POLISHING	
	Grinding wheels and blades	



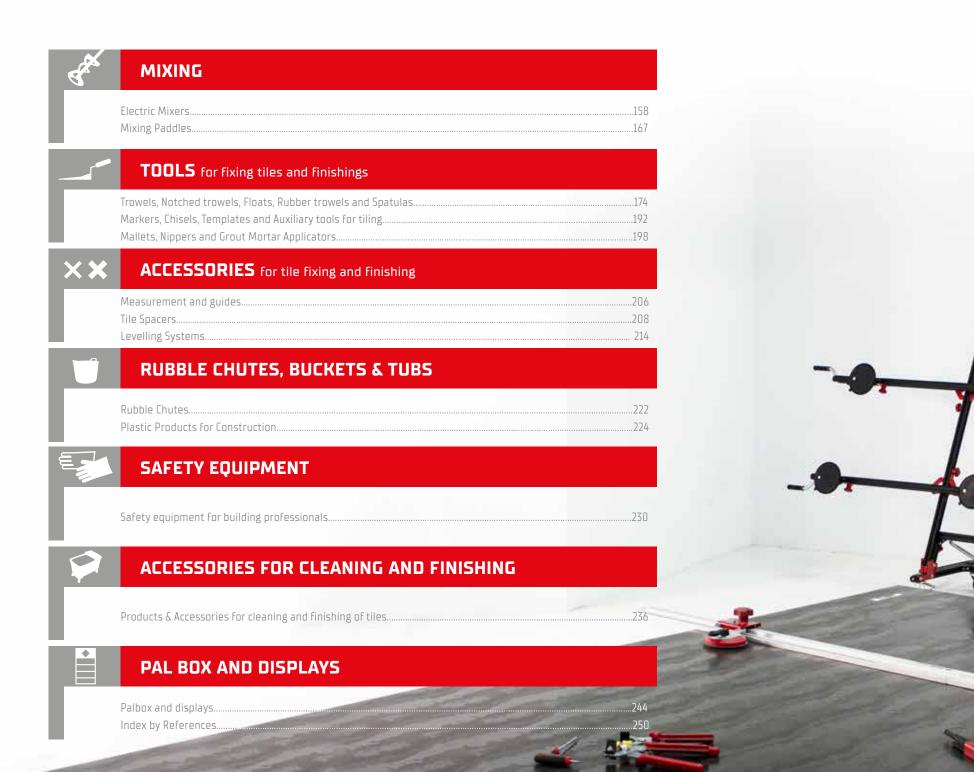

PURPOSE

BETTER PROFESSIONALS, BETTER PLACES

Our "Better professionals. Better places" purpose explains our approach in the two key areas that improve the quality and performance of our industry: those people whose trade is visible to everybody so that it can be admired, along with the places transformed by their creativity. We want to change the future by being and creating better professionals and building better places in favour of a better world.

1. RUBI GROUP

MISSION

Our mission is to provide outstanding solutions for construction professionals, through the design, manufacture and distribution of tools and equipment which ensure maximum efficiency, cost-effectiveness and safety for optimal ceramic tile laying, thereby maintaining the identity of the Boada brothers as well as their corporate legacy so that we can all build a better future together.

VISION

Our vision is to be a leading company at global level in solutions for cutting and laying tiles as a result of technological innovation and proximity to the user, thus improving the quality of life of our customers, partners, shareholders and society.



THE BEST OPTION FOR EACH JOB SINCE 1951

Our history began in 1951, when brothers Joan and Antoni Boada i Sucarrats obtained the patent for their innovative tool for cutting hydraulic mosaic, glazed and ceramic tiles. Together, they produced 25 units in the garage of their house in Rubí, Catalonia. The new "RUBI mosaic and tile cutter" made its appearance at the first National Invention Exhibition in Barcelona, where it won the diploma of honour and gold medal.

The Boada brothers devoted themselves to developing and sharing their innovative technology with other professionals. In 1969, Mr Miquel Escayol i Vila joined them and the limited company Hermanos Boada S.A. was created.

Since then, the reputation of the company has spread throughout the world and the RUBI name has become synonymous with truly cutting-edge solutions that offer top craftsmen an unprecedented level of quality, efficiency and professionalism.

Thus, the RUBI Group specialises in the design, manufacture and distribution of machinery and tools for cutting, laying and maintaining tiles. Placing installers at the centre of our strategy means that innovation, high product quality and excellence are always present in our product range.

Currently, the RUBI brand is recognised by the most demanding construction and design professionals in more than 120 countries, thanks to our large international network of subsidiaries and branches.

The RUBI team works with the opportunities that new trends and technologies offer, as well as the advances relating to communication, safety and environmental responsibility, in order to lead in the construction sector, while staying faithful to our core values and devotion to providing solutions to the needs of tile installers around the world.

WE PROVIDE QUALITY AND INNOVATION TO THE WORLD







People in the RUBI Team



Production and logistics centres



International subsidiaries



Corporate museum



Countries with RUBI brand distribution



Official distributors



The RUBI Group has two production centres: Santa Oliva (Spain) and Suzhou (China). They are all equipped with the latest production and logistics technology to ensure that we obtain high-quality products and a shipping service which minimises delivery times.

RUBI's 11 subsidiaries cover global demand and the training and after-sales service, together with our trusted distributors, so we are always close to the user and can offer them solutions adapted to the characteristics of each market.

CORPORATE MUSEUM

Since 1951, the RUBI team has been working to dignify the construction trades. For this reason, in 2003, together with the launch of RUBI's main production centre, we opened our "Construction Tools" corporate museum, which is also located in Santa Oliva, Tarragona. This original space shows everything from the evolution of tools in the sector to that of RUBI's own manual cutter, as well as taking a historical journey through the Group's more than 70 years of history.

The space is open to professionals and students who can, in an educational way, consider our historical collection of construction tools, which includes RUBI's own tools, a private collection of tools belonging to the Gaudí Foundation, the extensive showroom with the entire RUBI catalogue and an area with the 5 stages of the tiling process. An experimentation area is also provided for students who visit us, so they can test their skills in cutting and tile laying first-hand using the mosaic technique.



2. INNOVATION & QUALITY

The essence of the RUBI brand is: a job well done. This is in line with our dedication and contribution to the tiling trade worldwide.

This can be clearly appreciated in everything we do, and in the way our customers can use the products that we manufacture to carry out their work with special attention to creativity and details, thereby obtaining a great, high-quality result.

A JOB WELL DONE



INNOVATION

We are constantly researching and developing new solutions based on the evolution of market and technology trends, our own experience and ongoing conversations with our partners and other professionals.

QUALITY

We only use materials of the highest quality and we work in compliance with strict design and manufacturing standards in order to offer tools with the performance levels that our users expect.

GUARANTEE

We strive to offer greater durability in our products and a peace of mind that comes from our long track record, also backed up by a customer support service and constant communication with the same global nature.

SOLUTIONS

Understanding and helping to shape our industry for generations has allowed us to create a wide range of tools that provide excellence and efficiency in the cutting and laying of tiles.

TECHNOLOGICAL LEADERSHIP



Patented products.



Protected Industrial Designs.





3. RUBI COMMITMENT

The RUBI Group works with a sustainable development model, which respects the environment and prioritises equal opportunities. Our Corporate Social Responsibility strategy covers the three sustainability areas: social, environmental and economic. For this reason, it is based on 8 of the 17 SDGs (Sustainable Development Goals 2015–2030) of the United Nations, which are also in-line with our corporate purpose.

"Environmental and sustainability policies should be the obligation of the RUBI Team. Only in a fairer, more equal and more sustainable world can we continue growing and working together with society and our environment."

RUBI Group







BETTER PROFESSIONALS, BETTER PLACES

We want to change the future by being and creating better professionals and building better places for a better world.

SUSTAINABLE DEVELOPMENT GOALS






4. RUBI GROUP

At Rubi we are a multidisciplinary team with great expertise and ongoing training.

The RUBI Team is made up of more than 650 professionals, works in the numerous subsidiaries and branches that the RUBI Group has at international level.

OUR DAY-TO-DAY WORK IS ALWAYS CARRIED OUT ACCORDING TO THE 3 RUBI VALUES

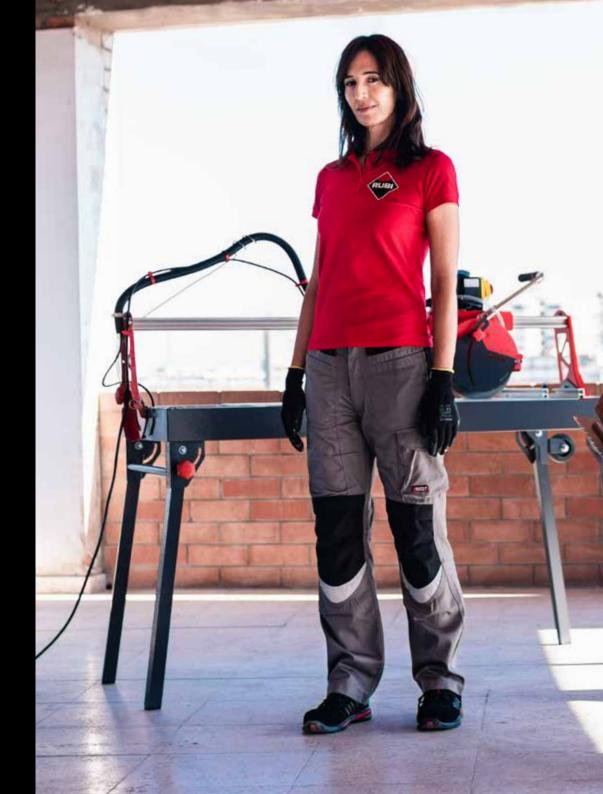



EXCELLENCE

Excellence defines us in all we do, thanks to our experience, flexibility and innovation. We strive each day to offer the best in our innovative products and our relationships with partners in the sector.

RESPECT

Respect is present in our DNA, our relationships within the RUBI Team and with customers, suppliers and other stakeholders, which allows us to create a close and dynamic environment.

PASSION

Passion is what drives us in our attitude to our work through commitment, optimism and determination. Our long history demonstrates a sustained enthusiasm over time – we love to inspire others.







TRAINING A FUNDAMENTAL PILLAR OF RUBI'S VALUE PROPOSITION



FOLLOW US ON OUR
YOUTUBE CHANNEL TO
SEE ALL THE TRAINING
VIDEOS

The main aim of the RUBI Academy is to empower tiling professionals so they can build better places through inperson or online training from our experts, always with the premise of offering very useful quality and cutting-edge knowledge for those interested in continuous learning.

Through guided and ongoing training, the RUBI Academy has positioned itself as a benchmark in the sector that is capable of hosting qualitative content for future professionals through Vocational Training programmes. This is a result of collaborative alliances with schools and institutes; specialising installers already active with any employment status, whether self-employed or employed; promoting the role of women within the tiling industry by providing support, guidance and the tools necessary for equality in the workplace; and to reactivate those who are unemployed by providing them with the skills and knowledge to rejoin the labour market.

Furthermore, the RUBI Academy has been designed as a cross-sector space where institutions linked to the tiling world converge, which allows for the creation of a synergy of efforts and talents with other actors in the industry. Adhesive, ceramics ranges, experts and departments linked to the sector find our school, located in Santa Oliva del Penedés, to be a suitable space for testing new products and new materials. This allows innovative tools to be developed that are capable of facilitating the delicate process of tile installation and, consequently, offering our stakeholders first-hand and up-to-date teaching materials so that, together and in step, we can be true to our corporate purpose: Better professionals. Better places.







AFTER-SALES

RUBI Group's after-sales service aims to meet the highest expectations of our customers around the world. RUBI's after-sales team, together with our extensive network of official technical services, work daily to deal as efficiently as possible with incidents and any questions and needs our customers and professionals may have regarding the cutting and laying of tiles.

Thanks to this effort, we can offer shorter response times while guaranteeing the promised performance in each of our tools and thus achieving a long-lasting and satisfactory purchase experience in response to the trust placed in us by all building professionals.

To do this, RUBI offers various contact channels:







www.rubi.com aftersales@rubi.com

+34 936 80 65 00





RUBI CLUB

RUBI CLUB members are always one step ahead of other tile laying professionals, thus gaining greater profitability and prestige for their business.

At RUBI, all products give you points that can be conveniently changed for money or gifts, and you get great discounts just for registering your purchases. You can also extend the useful life of your tools, with the free warranty extension of up to 5 years, and get the most out of your investments. Thanks to our new products and exclusive promotions for RUBI CLUB members, you can work with the best tools under the best conditions.

Currently, more than 70,000 experts in the art of tile laying around the world already trust CLUB RUBI to make them better professionals and deliver their projects in the most efficient way.

Join the top community of tile laying experts worldwide and benefit from all its advantages!



GET MONEY BACK ON YOUR PURCHASES



EXTEND THE WARRANTY FREE OF CHARGE



ACCESS EXCLUSIVE PROMOTIONS



RECEIVE INVITATIONS FOR EVENTS




ENJOY UNIQUE CONTENT



PARTICIPATE IN COMPETITIONS AND DRAWS



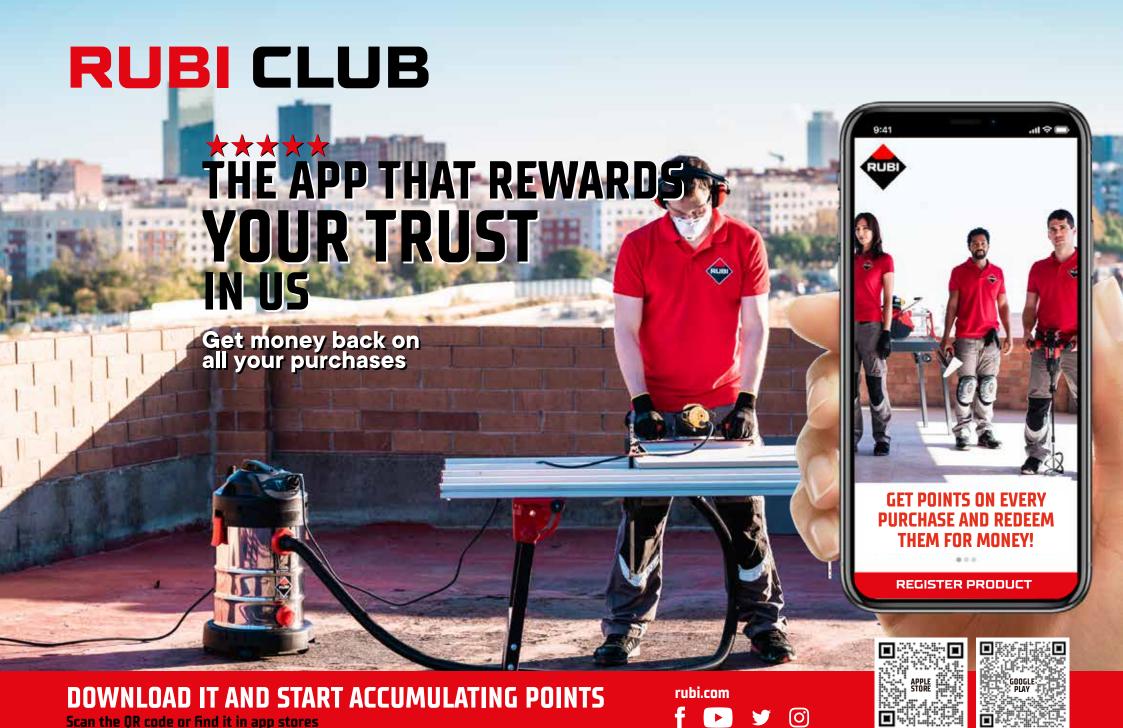



INSTALLATION IN PHASES

RUBI offers solutions that provide excellence in each step of the tiling process in order to guarantee quality, efficiency and creativity from start to finish. This is the basis for a clear marking on our entire range of products, with each product clearly indicating the stage it is intended for:

This approach provides a clear visual solution for product displays that directs the customer to the product that is suitable for the work in question.











1. Preparation

This stage includes all the processes prior to the install ceramic and porcelain tiles. Starting with the preparation and levelling of the substrates and the verification of the levels. Followed by the setting out and design of the joint pattern and finishing with the preparation and application of the ceramic adhesive.



2. Cutting and Drilling

Although, after the preparation of the adhesive, this logically takes us to the installation stage, RUBI has included the cutting and drilling phase in second place. The reason is very simple, if we take into account that the tile needs to be cut (or drilled), it cannot be installed until this step has been carried out.

All installations require tiles to be adapted and resized to the installation space and, whether it is to a greater or lesser extent, a ceramic tile will always have to be cut (or drilled).



3. Installation

In this stage, we mainly focus on bringing together all the necessary tools to ensure proper handling and installation of the tile, how to obtain the best results both in flatness and alignment in order to make the setting-out design a reality with maximum precision.



4. Grouting

As its name indicates, this stage includes all the tools necessary for the filling and definition of the tile ioint, as well as the removal of excess material and a first cleaning stage.



5. Cleaning

As it must do, the last stage brings together everything that is necessary to deliver the perfect job. The final cleaning of any ceramic tile installation process will always make the first impression on any user. For this reason, it is as important as any of the previous stages.





MANUAL TILE CUTTING

Manual Tile Cutters
Scoring wheels and accessories for manual cutters









INTENSIVE USE

PROFESSIONAL USE

OCCASIONAL USE

ADJUSTABLE FROM 0° - 45°

FIXED 0° / 45°

ADJUSTABLE FROM 0º - 45

FIXED 0° / 45°

FIXED 0° / 45°

antantantantantant

untertertertert

o hulmlud

Ambududududud

SELECTION TABLE



20 1/16"

24 1/16"

POCKET

PRACTIC

BASIC


POCKET

PRACTIC

51

61



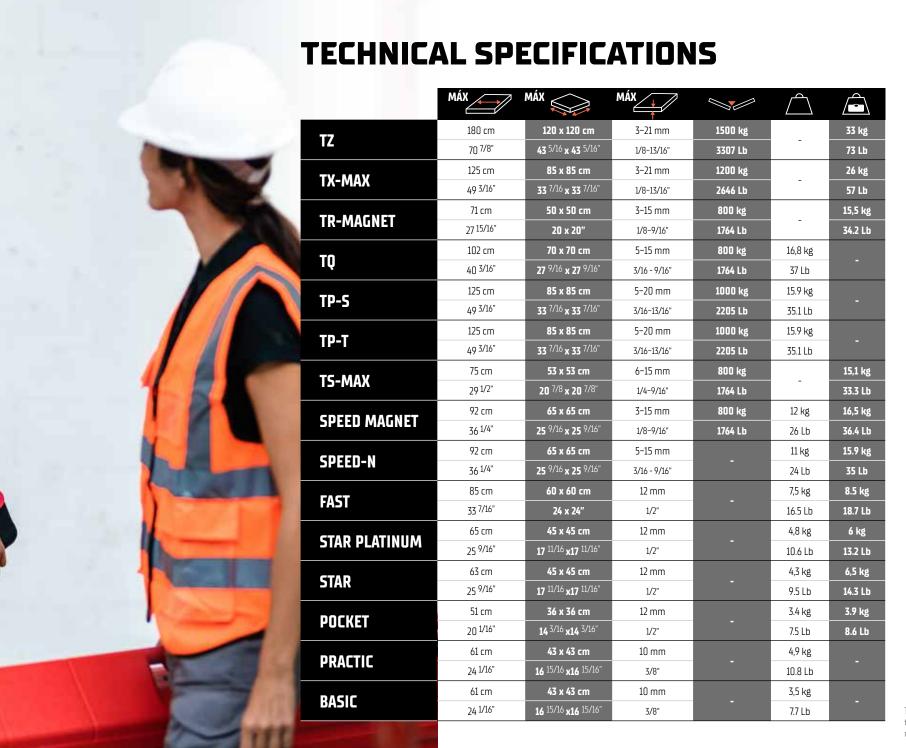

The information corresponds to the largest model of each machine.

























For intensive cutting of all types of ceramic and porcelain tiles.



- Powerful breaking system (up to 1.500 kg), operable with just one hand.
- 2 Accurate with soft slider movements.
- Large cutting capacity, up to 21mm thickness. Ideal for large format tiles*.
- Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft
- · Robust chassis, guides and breaking system.
- · Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- Easy to transport: rubber wheels with bearings and handle.
- · Interchangeable scoring wheels ranging from 0 8mm -22mm.
- · Includes 0 8 mm SILVER and 0 22 mm EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- · On models 1300/1550/1800:
- -The reinforced textile bag of these models includes 2 built-in wheels.

	Accessories
Ü	Ref. 18980 Maintenance Kit























	REF	\triangle								
TZ-850	17952	PREMIUM	2/	33 7/16"	24x24"	1/8-13/16"	3307 Lb	49.4 Lb	1	12
12-030	1/732	PREMIUM	V	85 cm	60x60 cm	3-21 mm	1500 kg	22.4 kg	1	12
TZ-1020	17051	17951 PREMIUM	2/	40 3/16"	27 9/16x27 9/16	1/8-13/16"	3307 Lb	54.2 Lb	1	12
12-1020	1/731		V	102 cm	70x70 cm	3-21 mm	1500 kg	24.6 kg	1	12
TZ-1300	17953	PREMIUM	2/	51 3/16"	35 7/16x35 7/16'	1/8-13/16"	3307 Lb	66 Lb	1	9
12-1300	1/733		V	130 cm	90x90 cm	3-21 mm	1500 kg	30 kg	1	7
TZ-1550	17954	PREMIUM	2/	61 1/16"	43 5/16x43 5/16	' 1/8-13/16"	3307 Lb	73 Lb	1	
12-1330	1/704	PREMIUM	V	155 cm	110x110 cm	3-21 mm	1500 kg	33 kg	1	6
TZ-1800 NEW	17924	PREMIUM	2/	70 7/8"	47x47"	1/8-13/16"	3307 Lb	79.94 Lb	1	
IZ-10UU NEW	1/724	PREMIUM	V	180 cm	120x120 cm	3-21 mm	1500 kg	36.26 kg	1	

^{*}Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter







##



























TX-MAX

For professional cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.










Ref. 18980 Maintenance Kit

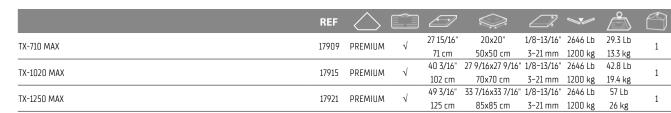

- Highly precise scoring.
- 2 Entire system highly efficient.
- Reinforced components. Heavy duty.
- 4 High breaking power (1,200 kg) MASTER POWER. One-handed operation.
- · Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- · Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- · The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- · Injected-aluminium base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- · Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 0 8 mm SILVER and 0 22 mm EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).









曲






















^{*}There are some materials over 15mm thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product

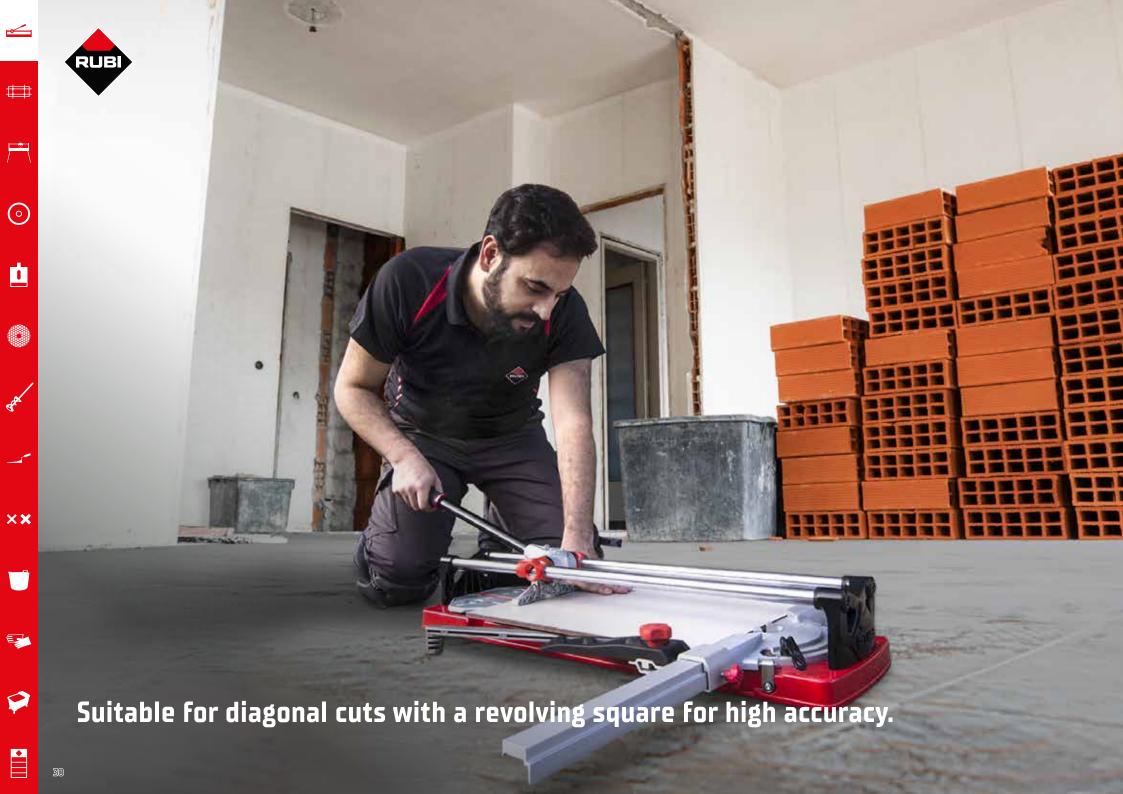

TR-MAGNET

Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.



- Fast operating system with magnet, for one handed use.
- 2 Reinforced operating material. Increased breaking power.
- Revolving square with central pivot for fast and accurate measurements for cutting angles.
- 4 Floating base with shock absorber for better tile breaking.
- · Solid steel guides, Ø 20 mm, chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.
- · Multipoint breaker 800 kg of power.
- · Heavy-duty metal arms.
- · Handle reinforced with SOFT-GRIP.
- · Lateral end stop for making repetitive cuts.
- · Base extension for large sizes.
- · Two-layer base with shock-absorbing effect.
- · High-strength aluminium base.
- · Interchangeable scoring wheels from 6 to 22 mm.
- · With 0 10mm SILVER and 0 22mm EXTREME scoring wheels and carrying case included.

	Accessories	
Û	Ref. 18980 Maintenance Kit	




















	REF	\triangle								
TR-600 MAGNET	1700E	SUPERPRO	2/	24"	16 9/16x16 9/16"	1/8-9/16"	1764 Lb	30.6 Lb	٦ .	18
IR-DUU MAUNEI	1/903	JUPEKPKU	PERPRU V	60 cm	42x42 cm	3-15 mm	800 kg	13.9 kg	2	10
TD 710 MACNET	1700/	CHDEDDDO		27 15/16"	20x20"	1/8-9/16"	1764 Lb	34.2 Lb	1	15
TR-710 MAGNET	17906	SUPERPRO	.RPRU V		50x50 cm	3-15 mm	800 kg	15.5 kg	1	

































Ideal for professional cutting of porcelain stoneware and intensive cutting of glazed stoneware tiles.



- Single-guide head with 6 radial bearings for smoother, more precise sliding.
- 2 Self-adjusting bearing system (Patented). Does not require any adjustment by the user.
- The breaker can be locked and unlocked with one hand for faster use.
- Rotating square, with central pivot point. Greater precision in angle cuts.
- · High precision.
- · Chrome-plated trapezoidal guide.
- · Rotating square, with central pivot point. More precise angle
- · Injected aluminium base for greater robustness.
- · With lateral end stop for repetitive cuts and thin strips.
- · Equipped with 2 additional arms for large-sized ceramic or porcelain tiles (Model 102).
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 022 mm EXTREME scoring wheel. For ceramic tiles with rough or structured surfaces. Compatible with 022 mm scoring wheel (ref. 18914) for tiles with smooth surfaces.

	Accessories:
Ů.	Ref. 18980 Maintenance Kit























	REF	\triangle				\	Å		
T0-66	1/1007	SUPERPRO	26"	18 1/8x18 1/8"	3/16-9/16"	1764 Lb	26 Lb	1	12
1Ų 00	14707		66 cm	46x46 cm	5-15 mm	800 kg	12 kg	1	12
TO 75	14000	SUPERPRO	29 1/2"	20 7/8x20 7/8"	3/16-9/16"	1764 Lb	28 Lb	1	12
TQ-75	14700		75 cm	53x53 cm	5-15 mm	800 kg	12.7 kg	1	12
TO.103	14000	CHDENDOO	40 3/16"	27 9/16x27 9/16"			37 Lb	1	12
TQ-102	14909	SUPERPRO	102 cm	70x70 cm	5-15 mm	800 kg	16.8 kg	1	12





##





























TP-S

Ideal for high quality cutting of ceramic and porcelain tiles.



- Guide system highly resistant to impacts resulting in longer product life.
- 2 Ergonomic handle with incorporated separator for greater speed and ease of use.
- 3 Swivel bracket with central pivot for fast and accurate measurements.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad.
- · 12 mm reinforced guide. Greater bending resistance and increased precision.
- · Lateral end stop for making repetitive precision cuts.
- · Two-layer base with shock-absorbing effect. Base extension for large sizes. Carrying handle. (TP-66-S and TP-75-S).
- · Assembly designed to be used by pushing the handle.
- · RUBIFLEX bi-material handle.
- · 0 22mm EXTREME scoring wheel included. (Ref. 01901)

	Accessories:
Ü	Ref. 18980 Maintenance Kit





















	REF	\triangle							
TP-66 S 129	1705/	SUPERPRO	26"	18 1/8x18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb	1	12
	FC/21	JUFLINFING	66 cm	46x46 cm	5-20 mm	1000 kg	11.5 kg	1	
TP-75 S	1205/	SUPERPRO	29 1/2"	20 7/8x20 7/8"	3/16-13/16"	2205 Lb	26 Lb	1	12
	12930	SUPERPRU	75 cm	53x53 cm	5-20 mm	1000 kg	12 kg	1	12
TP-102 S	11000	SUPERPRO	40 3/16"	27 9/16x27 9/16"	3/16-13/16"	2205 Lb	39.2 Lb	1	17
TP-102 5	11700		102 cm	70x70 cm	5-20 mm	1000 kg	17.8 kg	1	12
TP-125 S	11973	SUPERPRO	49 3/16"	33 7/16x33 7/16"	3/16-13/16"	2205 Lb	54 Lb	1	17
1F-1ZJ J	11975	JUPERPRU	125 cm	85x85 cm	5-20 mm	1000 kg	24.5 kg	1	12

^{*}Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

































Ideal for high quality cutting of ceramic and porcelain tiles.





- II Single guide system highly resistant to impacts. Longer life.
- 2 Separator set with height adjustment. Optimum separation for each thickness.
- 3 Swivel bracket with central pivot for fast and accurate measurement of angular cuts.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad. 12 mm reinforced guide. Greater bending resistance and increased
- · precision. Lateral end stop for making repetitive precision cuts. Two-layer base with shockabsorbing
- effect. Base extension for large sizes. Carrying handle. (TP-66-T and TP-75-T).
- · Assembly designed to be used by pulling the handle.
- · RUBIFLEX bi-material handle. Ergonomic and heavy duty
- Cut thickness adjustment system with 3 settings [6–9 mm/9–12 mm/12-20 mm)*, fast and precise.
- \cdot 0 22mm EXTREME scoring wheel included (Ref. 01901).

	Accessories:
ů,	Ref. 18980 Maintenance Kit

















	REF	\triangle							
TP-66 T	12055	SUPERPRO	26"	18 1/8x18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb	1	12
r 00 i	1277		66 cm	46x46 cm	5-20 mm	1000 kg	11.5 kg		12
TP-75 T	12057	SUPERPRO	29 1/2"	20 7/8x20 7/8"	3/16-13/16"	2205 Lb	26 Lb	1	12
1P-731	12957	JUPERPRU	75 cm	53x53 cm	5-20 mm	1000 kg	12 kg	1	12
TP-102 T	11001	CHDEDDDO	40 3/16"	27 9/16x27 9/16"	3/16-13/16"	2205 Lb	36.2 Lb	1	12
IP-1UZ I	11901	SUPERPRO	102 cm	70x70 cm	5-20 mm	1000 kg	16.4 kg	1	12
TP-125 T	11974	SUPERPRO	49 3/16"	33 7/16x33 7/16"	3/16-13/16"	2205 Lb	51 Lb	1	12
IL-173 I	11974	JUPERPRU	125 cm	85x85 cm	5-20 mm	1000 kg	23 kg	1	12

^{*}Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.































TS-MAX

Cut & Drill

Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.



	REF	\triangle						Å		
TS-43 MAX	18920	SUPERPRO	√	16 15/16"	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	24
13-43 MAX	18920	SUPERPRU	V	43 cm	30x30 cm	6-15 mm	800 kg	8.8 kg	1	24
TS-57 MAX	18921	SUPERPRO	V	22 7/16"	16x16"	1/4-9/16"	1764 Lb	21.8 Lb	1	24
IS-S/ IVIAX	10721	JUPERPRU	٧	57 cm	40x40 cm	6-15 mm	800 kg	9.9 kg	1	24
-66 MAX 18922	SUPERPRO	V	26"	18 1/8x18 1/8"	1/4-9/16"	1764 Lb	29.5 Lb	1	20	
	10722	JUFLINFING	٧	66 cm	46x46 cm	6-15 mm	800 kg	13.4 kg	1	
TS-75 MAX	18923	SUPERPRO	V	29 1/2"	20 7/8x20 7/8"	1/4-9/16"	1764 Lb	33.3 Lb	1	20
	10723	JUPLKPKU	v	75 cm	53x53 cm	6-15 mm	800 kg	15.1 kg	1	20
TS-43 MAX (GREY)	18972	SUPERPRO	$\sqrt{}$	16 15/16"	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	24
13-43 MAX (UKET)	107/2	JUPERPRU	V	43 cm	30x30 cm	6-15 mm	800 kg	8.8 kg	1	24
TS-66 MAX (GREY)	18974	SUPERPRO	V	26"	18 1/8x18 1/8"	1/4-9/16"	1764 Lb	29.5 Lb		20
15-00 MAX [UREY]	18974	SUPERPRU	V	66 cm	46x46 cm	6-15 mm	800 kg	13.4 kg	1	20
TS-75 MAX (GREY)	18975	SUPERPRO	V	29 1/2"	20 7/8x20 7/8"	1/4-9/16"	1764 Lb	33.3 Lb	1	20
ET-CI MAN (UKET)	18975	JUPEKPKU	٧	75 cm	53x53 cm	6-15 mm	800 kg	15.1 kg	1	20

- Progressive breaking system "SMART POWER" adapts to different material hardness.
- Wide base. Greater base surface for higher stability and cutting quality.
- Reinforced components for heavy duty work. High durability.
- 4 Ergonomic handles. Maximum comfort.
- Bigger reinforced base for a higher comfort and better stability when cutting.
- · Powerful single point breaker. Up to 800 kg breaking pressure.
- · Double guide for direct view of scoring/cutting line.
- · Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- · Lateral stop for repetitive straight and 45° cuts.
- · Interchangeable scoring wheels ranging from 0 6mm to 22 mm.
- · Includes 0 8mm ENDURE and 0 10 mm SILVER scoring wheels and a transport case with reinforced locks and hinges.

	Accessories:
Û	Ref. 18980 Maintenance Kit





##


(o)

<u>†</u>

XX





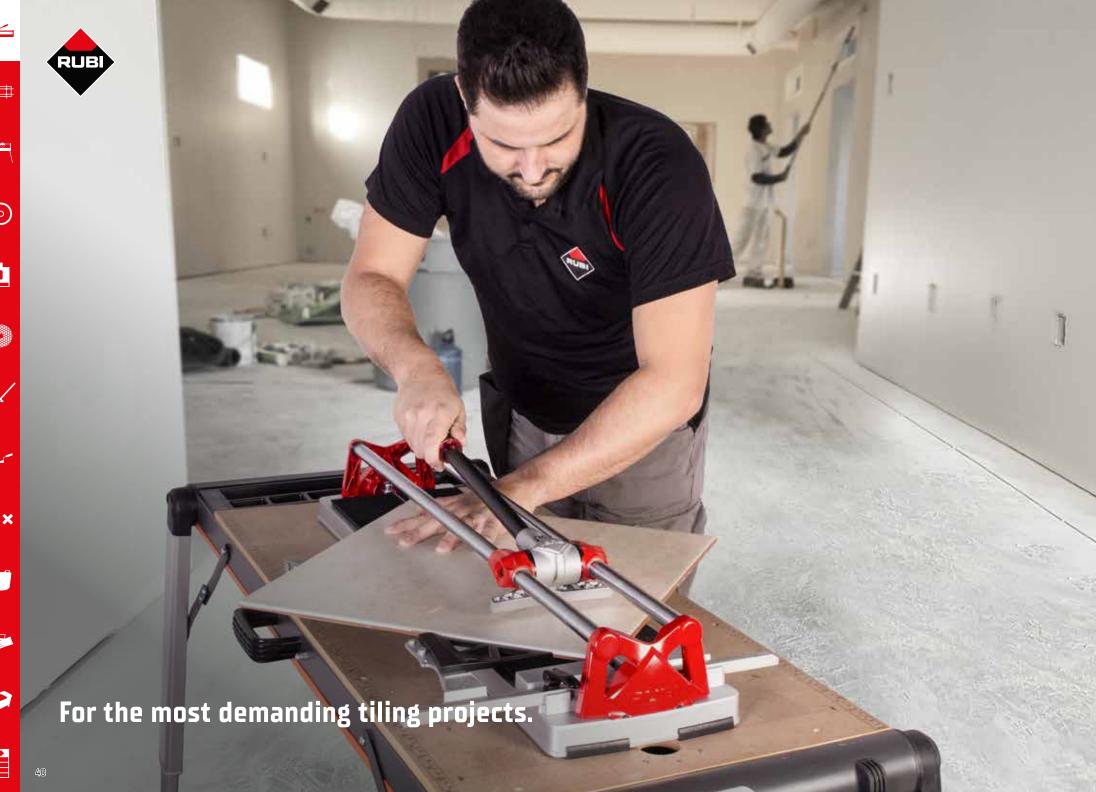



























SPEED-MAGNET

For professional cutting all types of ceramic and porcelain tiles.



- Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- Great visibility during scoring.
- Reinforced structured elements. High breaking power.
- 4 Aluminium base for robustness. Light and easy to transport.
- · Solid 20mm steel guides. Chromed and rectified with anticorrosion treatment for greater resistance to twisting.
- · Multipoint breaker 800kg power.
- · Reinforced SOFT-GRIP handle.
- · Lateral stop for repetitive cuts and 45 degrees square.
- · Interchangeable scoring wheels ranging between 0 6mm-22mm.
- · Scoring wheel 0 8mm ENDURE. included.
- · Direct view of scoring and cutting line.
- · 72/92 models:
- -Aluminium lateral support.

	Accessories	
à	Ref. 18980	
40 0	Maintenance Kit	



















REF		\triangle								
1/,000	2/	CIINEDDDO	24 7/16"	17 5/16x17 5/16"	1/8-9/16"	1764 Lb	18 Lb	25.4 Lb	ז	24
14700	V	JUPLKPKU	62 cm	44x44 cm	3-15 mm	800 kg	8 kg	11.5 kg	2	24
14000	2/	CIINEDDDO	28 3/8"	20 1/16x20 1/16"	1/8-9/16"	1764 Lb	20.9 Lb	30 Lb	ז	18
14707	V	SUPERPRU	72 cm	51x51 cm	3-15 mm	800 kg	9.5 kg	13.6 kg		10
14990	2/	SUPERPRO	36 1/4"	25 9/16x25 9/16"	1/8-9/16"	1764 Lb	26 Lb	37 Lb	1	18
	V		92 cm	65x65 cm	3-15 mm	800 kg	12 kg	16.8 kg	1	10
14000		CIINEDDDO	24 7/16"	17 5/16x17 5/16"	1/8-9/16"	1764 Lb	18 Lb	0 Lb	ז	30
14700	-	JUPEKPKU	62 cm	44x44 cm	3-15 mm	800 kg	8 kg	- kg	2	JU
1,6001		CIIDEDDDO	28 3/8"	20 1/16x20 1/16"	1/8-9/16"	1764 Lb	20.9 Lb	0 Lb	1	35
14701	-	JUPEKPKU	72 cm	51x51 cm	3-15 mm	800 kg	9.5 kg	- kg	1	33
14000		CIIDEDDDD	36 1/4"	25 9/16x25 9/16"	1/8-9/16"	1764 Lb	26 Lb	0 Lb	1	70
14982 -	JUPEKPKU	92 cm	65x65 cm	3-15 mm	800 kg	12 kg	- kg	1	28	
	14988 14989	14988	14988 √ SUPERPRO 14989 √ SUPERPRO 14990 √ SUPERPRO 14980 - SUPERPRO 14981 - SUPERPRO	14988	14988	14988	14988	14988	14988	14988

































SPEED-N

For professional cutting of ceramic tiles and occasionally for porcelain tiles.





- Reinforced structured elements. High breaking power.
- 2 Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- 3 Aluminium base for higher robustness.
- 4 Light and easy to transport.
- · With lateral stop for repetitive cuts and 45 degree squares.
- · Interchangeable scoring wheels ranging between 0 6mm to
- · Scoring wheel 0 8 mm SILVER included.
- · Direct vision of scoring and cutting line.
- · 72/92 models;
- -Aluminium lateral support.

	Accessories
Ü	Ref. 18980 Maintenance Kit















	REF	\triangle								
SPEED-62 N WITH CASE	14985	PRO	24 7/16"	2/	17 5/16x17 5/16"	3/16-9/16"	15 Lb	23.4 Lb	ז	24
SPEED-02 IN WITH CASE	14703	PRU	62 cm	V	44x44 cm	5-15 mm	7 kg	10.6 kg		24
SPEED-72 N WITH CASE	14986	PRO	28 3/8"	2/	20 1/16x20 1/16"	3/16-9/16"	18.1 Lb	27.6 Lb	ז	18
SPEED-72 N WITH CASE	14700		72 cm	٧	51x51 cm	5-15 mm	8.2 kg	12.5 kg	2	10
SPEED-92 N WITH CASE	14987	PRO	36 1/4"	\checkmark	25 9/16x25 9/16"	3/16-9/16"	24 Lb	35.1 Lb	1	18
DEED-AS IN MILLI CADE		PKU	92 cm		65x65 cm	5-15 mm	11 kg	15.9 kg	1	18
SPEED-62 N	14975	PRO	24 7/16"	_	17 5/16x17 5/16"	3/16-9/16"	15 Lb	23.4 Lb	7	30
SPEED-07 IV	149/3	PKU	62 cm	-	44x44 cm	5-15 mm	7 kg	10.6 kg	2	30
SPEED-72 N	14976	PRO	28 3/8"		20 1/16x20 1/16"	3/16-9/16"	18.1 Lb	27.6 Lb		/0
3PEEU-12 N	14970	PKU	72 cm	-	51x51 cm	5-15 mm	8.2 kg	12.5 kg	1	40
CDEED OF M	1/077	DDO	36 1/4"		25 9/16x25 9/16"	3/16-9/16"	24 Lb	35.1 Lb		
SPEED-92 N	14977	PRO	92 cm		65x65 cm	5-15 mm	11 kg	15.9 kg	1	28

































FAST

For professional cutting of ceramic tiles.





- Extruded aluminium base.
- New rigid and stable separator.
- Reinforced 18mm guides for greater resilience.
- Four side brackets for a great additional support.
- · Wider foam base.
- · Chromed steel guides with anti-rust treatment.
- · Lateral stop with 45° square.
- · Base for greater support of the tile.
- · Interchangeable scoring wheels from 01/4"(6mm) to 3/8"
- \cdot 01/4" (6mm) SILVER scoring wheel included.
- · Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

	Accessories:
The state of the s	Ref. 18980 Maintenance Kit

















	REF	\triangle								
FAST-85 WITH BAG	13939	PRO	\checkmark	33 7/16"	24x24"	1/2"	16.5 Lb	18.7 Lb	ז	32
LAST OS WITH DAG		FILU		85 cm	60x60 cm	12 mm	7.5 kg	8.5 kg	2	J2
FAST-65	13940	DDO		25 9/16"	17 11/16x17 11/16"	1/2"	13.9 Lb	0 Lb		48
C0-1CA	13940	PRO	-	65 cm	45x45 cm	12 mm	6.3 kg	- kg	4	48
EACT OF	17071	PRO		33 7/16"	24x24"	1/2"	16.5 Lb	0 Lb		32
FAST-85	13941	PKU	_	85 cm	60x60 cm	12 mm	7.5 kg	- kg	Z	JZ
































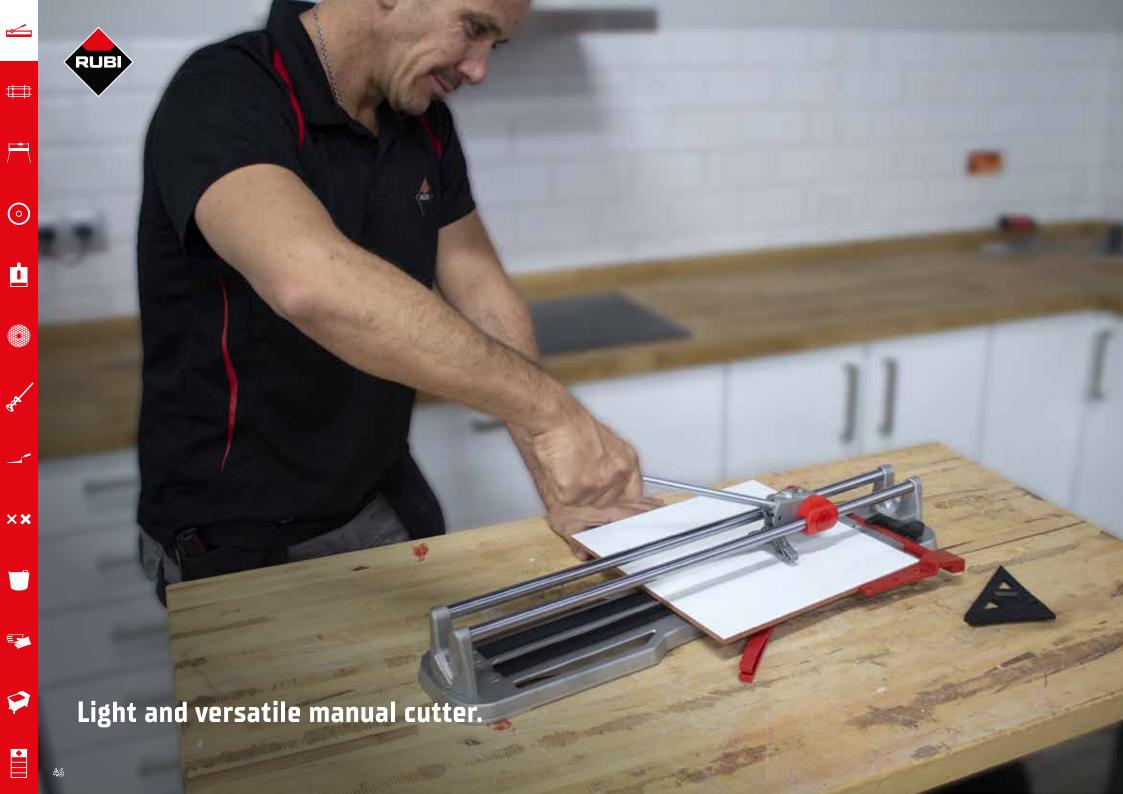

STAR PLATINUM

For cutting ceramic tiles.



- Multipoint breaker with aluminium pressure pad and steel breaker bar for greater ROBUSTNESS and breaking POWER.
- 2 Aluminium tool holder, more RIGID and STABLE for EASIER tile scoring.
- 3 Cast aluminium base, LIGHT and STRONG with side extensions for large pieces.
- 4 Cast ALUMINIUM guide supports for greater ROBUSTNESS.
- Dual guide for greater VISIBILITY of the scoring and cutting line.
- · Solid, chromed, ground and calibrated steel guides with anticorrosion treatment.
- \cdot Side stop with millimetre scale and 45° square.
- · Interchangeable scoring wheels from 01/4"(6mm) to 3/8" (10mm).
- \cdot 0 6 mm SILVER scoring wheel included.

Accessories	
Ref. 18980 Maintenance Kit	















	REF	\triangle						Å		
STAR-63 PLATINUM WITH CASE	15904	PRO	V	24 13/16"	17 11/16"	1/2"	9.68 Lb	13.32 Lb	/	1
JIAK UJ PLAIINOM WIIII CAJE	13704			63 cm	45X45 cm	12 mm	4.39 kg	6.04 kg	4	1
STAR-51 PLATINUM	15001	DDO		20 1/16"	14 3/16"	1/2"	8.29 Lb		4	1
STAK-SI PLATINUM	15901	PRO		51 cm	36X36 cm	12 mm	3.76 kg		0	1
STAR-63 PLATINUM	15902	PRO		24 13/16"	17 11/16"	1/2"	9.68 Lb		,	1
SIAKTOS MLATINUIVI	13702	PKU	J	63 cm	45X45 cm	12 mm	4.39 kg		0	







##



























STAR

Cut & Drill

For professional cutting of ceramic tile and occasional cutting of porcelain tiles.





- Closed sliding mobile breaker for greater bending strength.
- 2 New support reinforced for durability and power separation.
- 3 Chromed steel guides with anti-rust treatment for greater durability.
- Base for correct support of the tile.
- · Interchangeable scoring wheels from 01/4" (6mm) to 3/8"
- \cdot 01/4" (6mm) SILVER scoring wheel included.
- · Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

	Accessories:
Ü	Ref. 18980 Maintenance Kit









	REF	\triangle						Å											
STAR-42 WITH CASE	14946	PRO	V	16 9/16"	12x12"	1/2"	7.5 Lb	10.6 Lb	4	48									
STAR 42 WITH CASE	14740	FILU		42 cm	30x30 cm	12 mm	3.4 kg	4.8 kg	7										
STAR-51 WITH CASE	14947	PRO	V	20 1/16"	14 3/16x14 3/16"	1/2"	8.2 Lb	12.3 Lb	/.	48									
STAK-ST MILLI CASE	14747		v	51 cm	36x36 cm	12 mm	3.7 kg	5.6 kg	4	40									
STAR-63 WITH CASE	H CASE 14948	PRO	V	24 13/16"	17 11/16x17 11/16"	1/2"	9.5 Lb	14.3 Lb	/	48									
STAK-03 WITH LASE	14948		PKU	PRU	PKU	PKU	PKU	PRU	PNU	PNU	FRU	PNU	V	63 cm	45x45 cm	12 mm	4.3 kg	6.5 kg	4
STAR-42	14943	PRO		16 9/16"	12x12"	1/2"	7.5 Lb	0 Lb	4	72									
31AK-42	14743			42 cm	30x30 cm	12 mm	3.4 kg	- kg	6	12									
STAR-51	14944	PRO		20 1/16"	14 3/16x14 3/16"	1/2"	8.2 Lb	0 Lb	4	72									
JIAK-JI	14744	PRU		51 cm	36x36 cm	12 mm	3.7 kg	- kg	6	12									
STAR-63	14945	חחח		24 13/16"	17 11/16x17 11/16"	1/2"	9.5 Lb	0 Lb	4	72									
21AK-03	14945	14945 PRU	4740 PRU	14945 PRO		63 cm	45x45 cm	12 mm	4.3 kg	- kg	6	12							





##

o



















##

(o)

XX



POCKET

2 Cut & Drill

Light and Functional for use in small working areas. For cutting ceramic tiles, ideal for stoneware and tile.





- With mobile breaker, ideal for diagonal cuts.
- 2 Folding base to optimise space and for easy transportation.
- 3 Aluminium structure compact and lightweight.
- Interchangeable scoring wheels for every material to maximize performance and cutting quality.
- · Chromed steel guides with anti-rust treatment.
- · Interchangeable scoring wheels from 01/4"(6mm) to 3/8" (10mm).
- \cdot 01/4"(6mm) SILVER scoring wheel included.
- \cdot Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

Accessories



Ref. 18980 Maintenance Kit













	REF	\triangle								
POCKET-40 WITH CASE	12981	1 PRO	16 9/16"	2/	12x12"	1/2"	6.4 Lb	7.5 Lb	/	128
POEKET 40 WITH CASE	12701	PRU	42 cm	٧	30x30 cm	12 mm	2.9 kg	3.4 kg	4	120





PRACTIC

Cut & Drill

Ideal for small renovations and light work. For cutting ceramic wall and floor tiles.



- Movable breaker, ideal for diagonal cuts.
- 2 Aluminium guide supports for greater rigidity.
- 3 Lateral end stop for repetitive cuts.
- 4 Interchangeable scoring wheels to adapt to each material.
- · Chromed steel guides and aluminium support.
- \cdot Mobile breaker with 01/4"(6mm) SILVER scoring wheel included.
- · Interchangeable scoring wheels 01/4"(6mm) to 3/8"(10mm) for cutting different materials.

	Accessories
Ü	Ref. 18980 Maintenance Kit











	REF	\triangle						
ACTIC-51 249	24984	PRO	20 1/16"	14 3/16x14 3/16"	3/8"	6.4 Lb	6	77
FINACIIC 31		FILU	51 cm	36x36 cm	10 mm	2.9 kg	U	12
DDACTIC /1	74005	nno	24 1/16"	16 15/16x16 15/16"	3/8"	10.8 Lb	,	77
PRACTIC-61 2498		PRO	61 cm	43x43 cm	10 mm	4.9 kg	0	12

































⊙



BASIC

Cut & Drill

· Mobile breaker and 09/16"(14mm) SILVER Tungsten Carbide scoring wheel included.

· Also comes with lateral stop and 45° square.

· Base, guide & supports in steel and aluminium.

Accessories



Ref. 18980 Maintenance Kit

Ideal for small renovations and light work. For cutting ceramic wall and floor tiles.

















	REF	\triangle						
BASIC-50	25955	nnn	PRO 20 1/16"	14 3/16x14 3/16"	3/8"	5.5 Lb	4	77
DADIC JU	23733	טאין כניננ	51 cm	36x36 cm	10 mm	2.5 kg	U	12
DACIC / O	25057	nnn	24 1/16"	16 15/16x16 15/16"	3/8"	7.7 Lb	,	77
BASIC-60	25956 PRO		61 cm	43x43 cm	10 mm	3.5 kg		12





××

SCORING WHEELS

		Ø 6 mm Ø 1/4 inch	Ø 8 mm Ø 5/16 inch	Ø 10 mm Ø 3/8 inch	Ø 18 mm Ø 3/4 inch	Ø 22 mm Ø 7/8 inch
	SILVER	01945	01958	01946	01950	
TS-MAX	GOLD			01949		
TR-MAGNET SPEED-MAGNET			01906			
	EXTREME					01907
SPEED-N	SILVER	01945	01958	01946		
FAST POCKET STAR PLATINUM PRACTIC	GOLD			01949		
STAR			01906			
	SILVER		01959	01991	01992	
TZ	GOLD			01993		
TX-MAX			01903			
	EXTREME					01900
ΤQ	SILVER					18914
TP	EXTREME					01901
	SIVER					18914
SLIM CUTTER	EXTREME					01901
BASIC	SINER			01960 0 14 mn 0 9/16 ii		

The RUBI® scoring wheels are manufactured using highly resistant, durable Tungsten Carbide. GOLD: Scoring wheel made from Tungsten Carbide with Titanium surface treatment, long-lasting.





##























曲


 \odot

XX



SILVER EASY GOLD MEDIUM ENDURE EXTREME EXTREME

*Difficulty in terms of: Roughness, hardness, height, tensions, finishing.

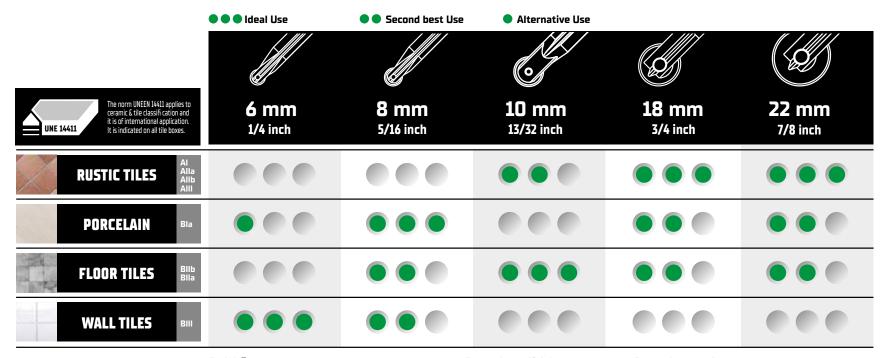

The RUBI® scoring wheels are manufactured using highly resistant, durable Tungsten Carbide. GDLD: Scoring wheel made from Tungsten Carbide with Titanium surface treatment, longlasting.

TS-MAX, TR-MAGNET & SPEED-MAGNET SCORING WHEELS

· For TS-MAX, TR-MAGNET and SPEED-MAGNET cutters.

6MM SILVER SCORING WHEEL [01/4"]



- · For wall tiles.
- · Tungsten carbide scoring wheel of high resistance and
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
SCORING WHEEL 01/4" (6MM)	N1945	PRN	10	4600
SILVER	01743	PRU	10	4000

8MM SILVER SCORING WHEEL [05/16"]



#

 \odot

XX



- · For wall tiles, floor tiles and porcelain tiles.
- · Tungsten carbide scoring wheel of high resistance and
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
SCORING WHEEL 05/16" (8MM) SILVER	01958	PRO	10	4600

8MM ENDURE SCORING WHEEL (05/16")



PATENTED

- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of tungsten carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.



10MM SILVER SCORING WHEEL (03/8")



- · For Floor tiles.
- · Tungsten carbide scoring wheel of high resistance and durability.
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
SCORING WHEEL 03/8" (10MM) SILVER	01946	PRO	10	4600

10MM GOLD SCORING WHEEL [03/8"]





- · For Floor tiles.
- · Tungsten carbide scoring wheel with a superficial titanium
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear. Long-lasting.

	REF	\triangle		
SCORING WHEEL 03/8" (10MM) GOLD	01949	SUPERPRO	10	4600











(



- · Tungsten carbide scoring wheel of high resistance and durability.
- · Patented shaft geometry; maximum precision and minimum vibration.

	REF	\triangle		
SCORING WHEEL 03/4" (18MM)	N195N	PRN	10	7/00
SILVER	01950	PRU	10	3600

22MM SCORING WHEEL [07/8"] EXTREME



PATENTED



- · For sharp cutting in hard tiles with rough or structured surfaces.
- · Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Patented model for maximum precision and minimum vibration.
- · Extra-long life.

	REF	\triangle	
SCORING WHEEL 07/8"(22MM) EXTREME	01907	PREMIUM	5





6MM SILVER SCORING WHEEL

- · Tungsten carbide scoring wheel of high resistance and durability.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
2 SCORING WHEEL 01/4" (6MM)	N1947	PRN	10	3600
SET SILVER	01747	PKU	10	2000

6MM [01/4"] & 10MM [03/8"] **SCORING WHEELS SET**



- · Tungsten carbide scoring wheel of high resistance and
- · Shaft made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
01/4" (6MM) & 03/8" (10MM) SCORING WHEELS SET	01948	PRO	10	3600

JAMAX & TZ SCORING WHEELS

 PLUS scoring wheels for TX-MAX & TZ professional cutters.

8MM PLUS SILVER SCORING WHEEL (05/16")





PATENTED

- · For wall tiles, floor tiles and porcelain tiles.
- · Tungsten carbide scoring wheel of high resistance and duration.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF	\triangle		
8MM PLUS SILVER SCORING	N1959	PRU	10	3600
WHEEL (05/16")	01737	PRU	10	טטטכ



XX

8MM PLUS SCORING WHEEL (05/16") ENDURE





- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of tungsten carbide.
- Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF	\triangle	
8MM PLUS SCORING WHEEL (05/16") ENDURE	01903	SUPERPRO	5

10MM PLUS SILVER SCORING WHEEL (03/8")







- · For floor tiles.
- Tungsten carbide scoring wheel of high resistance and duration.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF	\triangle		
10MM PLUS SILVER SCORING WHEEL (03/8")	01991	PRO	10	3600

10MM PLUS GOLD SCORING WHEEL (013/32")



##

(o)



- · For floor tiles.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.
- · Long-lasting.

	REF	\triangle		
10MM PLUS GOLD SCORING WHEEL (013/32")	01993	SUPERPRO	10	3600

18MM PLUS SILVER SCORING WHEEL (03/4")



- · For rough and difficult to cut tiles.
- · Tungsten carbide scoring wheel of high resistance and duration.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF	\triangle		
18MM PLUS SILVER SCORING WHEEL (03/4")	01992	PRO	10	3600


22MM SCORING WHEEL PLUS EXTREME(0 7/8")





- · For sharp cuttings in hard ceramic and porcelain tiles.
- \cdot Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF	\triangle		
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	PREMIUM	5	-

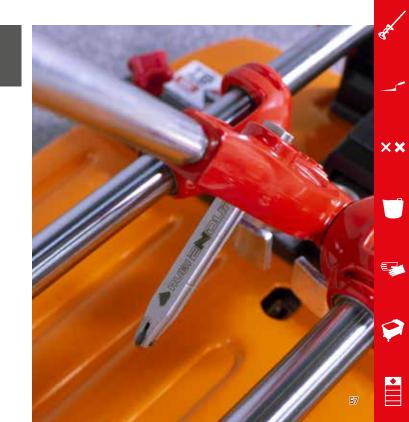





























TP & TQ SCORING **WHEELS**

 Adaptable scoring wheel for TP & TQ professional cutters.

SCORING WHEEL

Sets of scoring wheels of

different diameters with

SETS

box.

22MM SILVER SCORING WHEEL [07/8"] TP/TQ





- Exclusive for TP/TO cutters. Suitable for smooth and even surfaces and slightly rough surfaces.
- · Scoring wheel guide made for Tungsten Carbide.

	REF	\triangle	
22MM SCORING WHEEL (07/8") SILVER TP/TQ	18914	PRO	10

22MM SCORING WHEEL PLUS **EXTREME [0 7/8"] TP/TQ**





- · For sharp cuttings in hard ceramic and porcelain tiles.
- · Tungsten Carbide scoring wheel with a superficial Titanium
- · Mounted on bearing. Enhanced smooth user preception.
- · Extra-long life.

	REF	\triangle	
22MM SCORING WHEEL PLUS EXTREME (Ø	N19N1	PREMIUM	5
7/8") TP/TQ	01701	PREMIUM)

SCORING WHEEL SET 1



- · For TS-MAX, TR-MAGNET, TF-MAX, SPEED-MAGNET, SPEED-N, FAST, STAR-MAX, STAR, POCKET & PRACTIC ranges, includes 1 01/4" (6mm) SILVER scoring wheels and 1 03/8" (10mm) SILVER scoring wheel.
- · In plastic box with transparent cover.
- · Sunnlied in hlister

	REF	\triangle		
SCORING WHEEL SET 1	01995	PRO	5	450

SCORING WHEEL SET 2





- · For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of 01/4" (6mm),
- · 05/16" [8mm], 03/8" [10mm], 07/8" [18mm] [2 units] SILVER.
- · In plastic box with transparent cover.
- · Supplied in blister.

	REF	\triangle		
SCORING WHEEL SET 2	01996	PRO	5	450



SCORING WHEELS FOR **STANDARD MANUAL TILE CUTTERS**

 Selection of scoring wheels for SPEED-N, FAST, STAR-MAX, STAR, POCKET & PRACTIC manual cutters.

6MM SILVER SCORING WHEEL [01/4"]









- · Wheel made from tungsten carbide of high resistance and
- · Patented model with new high technology RUBI® alloy, maximum precision and resistant to wear.

	REF	\triangle		
6MM SCORING WHEEL (01/4")	N1945	PRN	10	4400
SILVER	01945	PRU	10	4600

8MM SILVER SCORING WHEEL [05/16"]



#

 \odot

XX



- · For wall tiles, floor tiles and porcelain tiles.
- · Wheel made from tungsten carbide of high resistance and
- · Patented model with new high technology RUBI® alloy, maximum precision and resistant to wear.

	REF	\triangle		
8MM SCORING WHEEL (05/16")	N1958	PRN	10	4600
SILVER	01730	PRU	10	4000

8MM SCORING WHEEL (05/16") ENDURE









- · Ideal for rough or structured surfaces.
- · Wheel made of tungsten carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF	\triangle	
8MM SCORING WHEEL (05/16") ENDURE	01906	SUPERPRO	5

10MM SILVER SCORING WHEEL (03/8")



- · For floor tiles.
- · Wheel made in tungsten carbide of high resistance and duration.
- · Shaft made with new high technology RUBI® alloy, maximum precision and minimum vibration.

	REF	\triangle		
10MM SCORING WHEEL (03/8") SILVER	01946	PRO	10	4600

6MM SILVER SCORING WHEEL SET [0 1/4"]





· Tungsten Carbide scoring wheel of high resistance and duration

	REF	\triangle		
6MM SCORING WHEEL SET (0 1/4") SILVER	01947	PRO	10	3600





- · Tungsten Carbide scoring wheel of high resistance and
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF	\triangle		
6MM (01/4") & 10MM (03/8")	N1948	nno	10	7/00
SILVER SCORING WHEELS SET	U1948	PRO	10	3600

14MM SILVER SCORING WHEEL [09/16"]





- · For BASIC. KIT and TEN-BRIC tile cutters.
- · Wheel made of Tungsten Carbide.

	REF	\triangle		
14MM SILVER SCORING WHEEL (09/16")	01960	PRO	10	4600

STAR & STAR MAX LATERAL

STOP







MAINTENANCE KIT



· Lateral stop for repetitive cuts with cuts 45 (millimetre increments).

,			
	REF	\triangle	
STAR, STAR-N, STAR-N PLUS & STAR MAX LATERAL STOP	12923	PRO	1
FULLIVE 2101			

ACCESSORIES FOR MANUAL TILE CUTTERS

· Lateral stops for manual cutters.

· Cleaning, lubricating & maintenance oil suitable for regular maintaining of cutter parts that are regularly used; guides, sliding system, tilted axes, spiral, metallic surfaces.

	REF	\triangle		
MAINTENANCE KIT	18980	SUPERPRO	8	640



XX

(o)

<u>t</u>

NIPPERS FOR PORCELAIN TILES



TILER NIPPERS

· Tungsten Carbide Pliers.

PARROT NIPPER - CARBIDE

· Bi-material handle Ergonomic.















































NIPPERS

- · Wide range of pliers for cutting ceramics, porcelain & glass.
- · Cellular concrete saw.

NIPPERS FOR CERAMIC TILES



· Specially for cutting narrow strips of a maximum of 7/16" [1 cm). Equipped with tungsten carbide GOLD scoring wheels with titanium surface treatment for longer useful life. By means of a gentle turn, the wheels can be repositioned when their vertex starts getting worn. If totally worn, they can be replaced using their corresponding spare piece, 0 3/4" (18 mm) GOLD spare scoring wheel long-life (Ref.01953).

	REF	\triangle		
NIPPERS FOR PORCELAIN	83942	SUPERPRO	5	765

NIPPERS FOR GLASS MOSAIC





- · Tungsten Carbide Edge.
- · Ideal for the rectification of straight cut on ceramics.
- · Bi-material handle Ergonomic.

	REF	\triangle	
NIPPERS FOR CERAMIC TILES	65926	SUPERPRO	6

- · Tungsten Carbide Edge.
- · Ideal for the rectification of glass mosaic tiles.
- · Ri-material handle Frennomic

	REF	\triangle	
NIPPERS FOR MOSAIC	71970	SUPERPRO	5

CELLULAR CONCRETE SAW

· Ideal for rectification of holes in ceramics.

65925 SUPERPRO



- · Saw with 29 Tungsten Carbide teeth.
- · Length: 29" (75cm).
- · Beechwood and varnished handle.

	REF	\triangle	
CELLULAR CONCRETE SAW	70930	SUPERPRO	2




SLAB SYSTEM CUTTING AND HANDLING LARGE-SIZED TILE

Cutting large tile Handling large tile Installing large tile





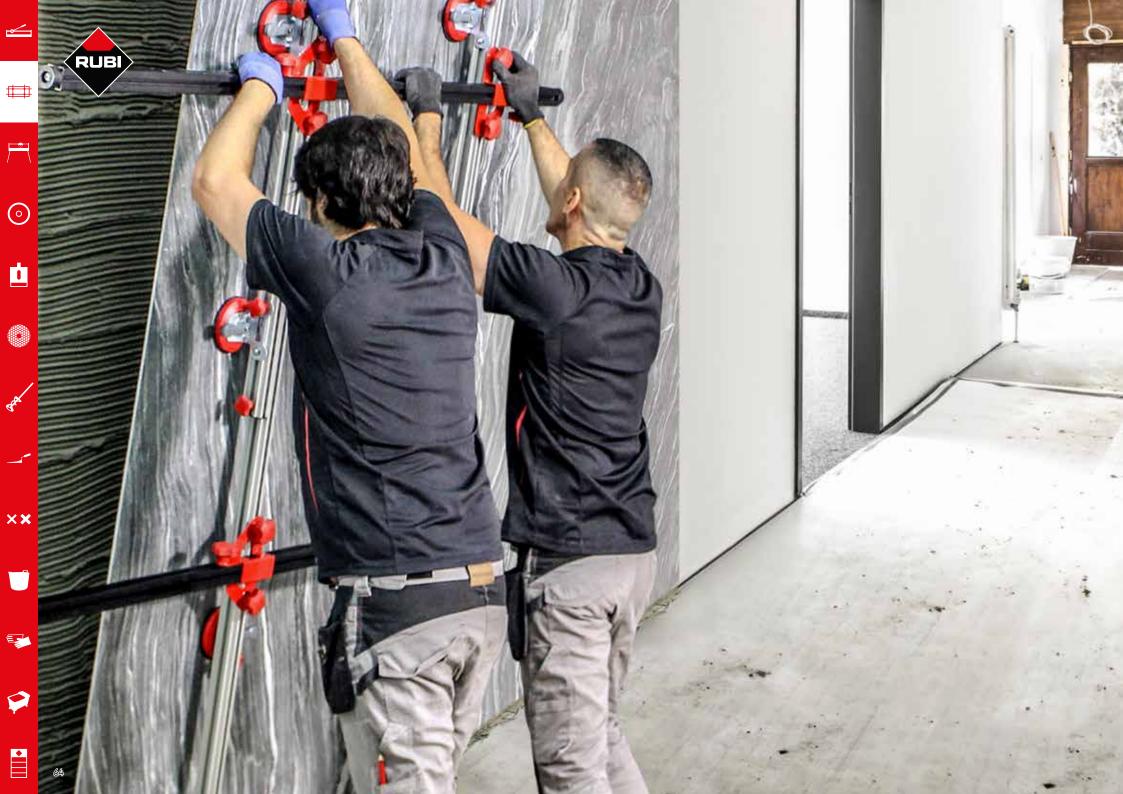



SLAB— SYSTEM

CUTTING

SLAB CUTTER G3 SLIM CUTTER PLUS G1 TC-125

MANIPULATION

SLAB TRANS HEAVY DUTY N SLAB TABLE

SLIM EASY TRANS PLUS

SLIM EASY TRANS

SLAB TRANS MINI

INSTALLATION

RUBI TRILLER

SLAB TABLE VERSA-TILE

SLAB TROLLEY

LARGE FORMAT INFORMATION

Material density: 2,45 g/m²



 $300 \times 100 \times 0.3 \text{ cm} = 22 \text{ kg}$ $118^{1/8} \times 39^{3/8} \times 1/8^{3} = 48.5 \text{ Lb}$

 $300 \times 100 \times 0.7 \text{ cm} = 51.5 \text{ kg}$ $118^{1/8} \times 39^{3/8} \times 1/4 = 113.5 \text{ Lb}$

 $160 \times 320 \times 0.6 \text{ cm} = 75,25 \text{ kg}$ $63\text{``} \times 126\text{'`} \times 1/4\text{''} = 165.9 \text{ Lb}$

 $160 \times 320 \times 0.8 \text{ cm} = 100.35 \text{ kg}$ $63\text{``} \times 126\text{'`} \times \frac{5}{16\text{'`}} = 221.2 \text{ Lb}$

 $120 \times 240 \times 0.9 \text{ cm} = 63.5 \text{ kg}$ $47^{1/4} \times 94^{1/2} \times 3/8 = 139.9 \text{ Lb}$

 $150 \times 300 \times 0.3 \text{ cm} = 33 \text{ kg}$ $59^{1/16"} \times 118^{1/8"} \times 1/8" = 72.75 \text{ Lb}$


 $150 \times 300 \times 0,6 \text{ cm} = 66 \text{ kg}$ $59 \frac{1}{16} \times 118 \frac{1}{8} \times \frac{1}{4} = 145.5 \text{ Lb}$

#

(o)

t

××

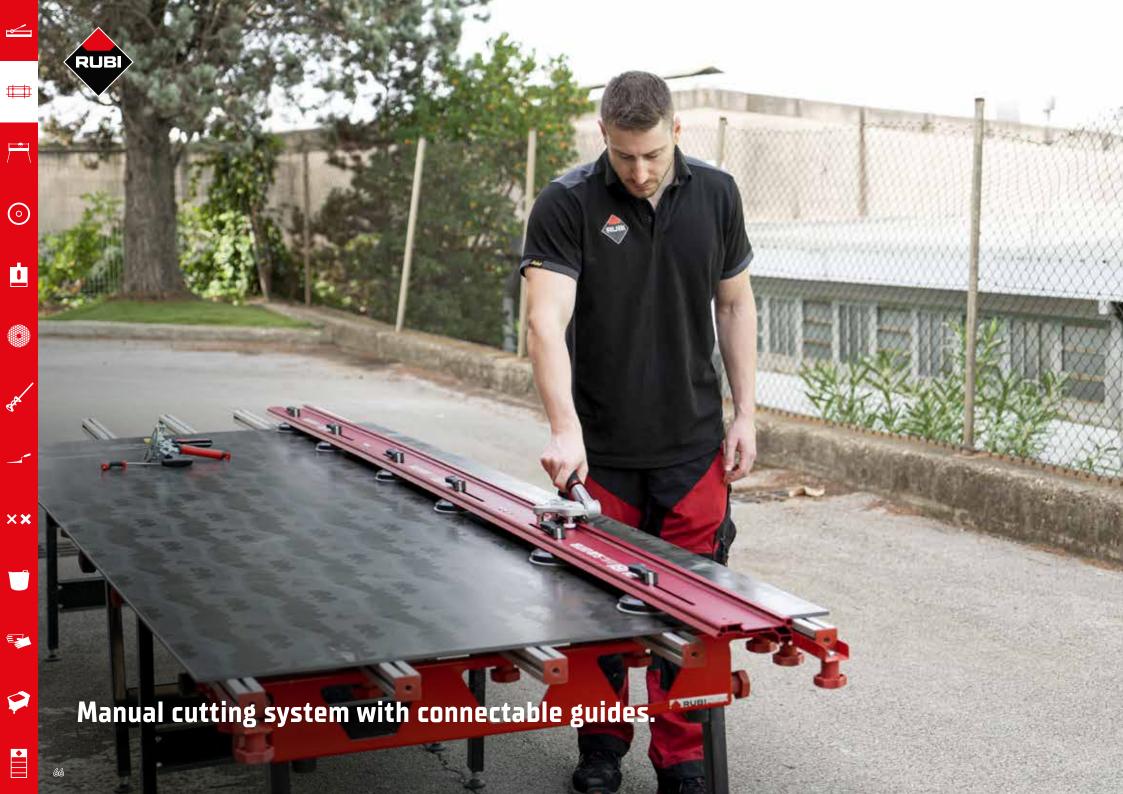

SLAB CUTTER G3

Cut & Drill

For manual cutting of large porcelain tiles.

















	REF	\triangle					*		
SLAB CUTTER G3 16	16900	PREMIUM	2/	126"	1/8-3/8"	24 Lb	35.7 Lb	1	
			110141 4	320 cm	3-10 mm	11 kg	16.2 kg	1	

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 10 mm to 20 mm.

- I System with movable suction cups integrated in the guides. Special grey rubber suction cups for rough surfaces that won't leave marks on the tile.
- Carriage with lever mechanism for perfect scoring. Extreme roller guide.
- Highly reinforced guides. Easily interconnected by means of an adjustable lever mechanism.
- Transport bag with padded handles and pockets for accessories.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking, 2-in-1 nippers and breaker.
- Ø 22 mm RUBI EXTREME roller guide made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- Each set contains: Three 112 cm guides, 1 marker carriage with 22 mm roller guide, 1 set of nippers and 6 suction cups.
- Transport bag with padded handles and pockets for accessories.

	Accessories:
*	Ref. 18917 Slab Breaker Plus
/	Ref. 16908 Slim Cutter G3 Supplement Guide and Suction Cups
<u></u>	Ref. 54918 Slab breaker pliers



(o)


t

XX



SLIM CUTTER PLUS

For manual cutting of large porcelain tiles with thicknesses between 3



















	REF	\triangle						
SLIM CUTTER PLUS	18959	SUPERPRO	√	141 3/4"	3/8"	15 Lb	1	25
				360 cm	10 mm	/ kg		

- 110 cm long extruded aluminium guides which can be connected together.
- 2 360 cm cutting capacity (extendable according to need by adding extra guides, Ref.18913).
- 3 natural rubber suction cups suitable for smooth and rough surfaces for better fixing of the guides to the tile.
- 4 Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- · Recommended thicknesses between 3 and 10 mm.
- · More ergonomic scoring carriage with a score increase of 30 %.
- · 0 22mm RUBI EXTREME scoring wheel made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- · Includes practical transport bag manufactured in reinforced nylon with handles and shoulder strap. Includes 4 interior compartments for accessories.
- · Each set contains: Four 110 cm guides. 1 scoring carriage with 22 mm Extreme scoring wheel, 1 set of nippers, 3 suction cups and 1 Allen key.

	Accessories:
	Circular saw TC-125
*	Ref. 18917 Slab Breaker Plus
	Ref. 18913 Slim System Cutter Guide 110cm.
<u></u>	Ref. 54918 Slab breaker pliers



















































CUTTING



- · Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- · To separate thicknesses of 6 mm a 20 mm.
- · Soft-grip handle for a better comfort and ergonomic.
- · With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow strips.
- · Rubber pressure pad for greater control and more precise separation.

		_				
				REF	\triangle	
SLAB BREA	AKER PLUS			18917	PREMIUM	1

SLIM CUTTER PLUS CAR SET





NEW

· Trolley with an ergonomic handle for G1 cutting system.

	REF	\triangle	
SLIM CUTTER PLUS CAR SET	18879	SUPERPRO	1

SLAB BREAKER NIPPERS



- · RUBI® SLAB BREAKER NIPPERS are nippers/breaker for large porcelain tiles of between 3 and 10 mm thick.
- · Nippers with bi-material soft-grip handle with clip to keep the nippers closed.
- · High breaking power for tiles from 3 to 10 mm thick.
- · Reinforced nippers designed for greater comfort and durability.
- \cdot Can be used as nippers for thinner tiles and as a breaker if the thickness or hardness of the material requires it. 2-in-1 nippers and breaker.

	REF	\triangle	
SLAB BREAKER PLIERS	54918	SUPERPRO	1

22MM SCORING WHEEL PLUS EXTREME (0 7/8") SLAB CUTTER



SLIM SYSTEM CUTTER GUIDE



SLAB CUTTER G3 SUPPLEMENT GUIDE





()

XX



- · For sharp cuttings in hard tiles with rough or structured surfaces.
- Tungsten Carbide scoring wheel with a superficial Titanium treatment
- · Mounted on bearing. Enhanced smooth user preception.
- · Extra-long life.

	REF	\triangle	
22MM SCORING WHEEL PLUS EXTREME (0	N19N1	PREMIUM	Е
7/8") SLAB CUTTER	01701	PREMIUM	כ



· Aluminium guide- 110cm.

	REF	\triangle		
SLIM SYSTEM CUTTER GUIDE	18913	SUPERPRO	3.7 Lb	1
110CM.	10713	JUPERPRU	1.7 kg	1



NEW

- · Extruded aluminium guide with extra 112 cm.
- · Includes two suction cups integrated into the guide.

	REF	\triangle	
SLAB CUTTER G3 SUPPLEMENT GUIDE AND	1/000	DDEMILIAA	1
SUCTION CUPS	10908	PREMIUM	1

CIRCULAR SAW TC-125





- · Switch with safety lock. Prevents unintentional start-up. Electrical cable with RCD.
- · Bi-material additional grip. Principally for mitre cuts.
- · Compatible with diamond discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type)
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- Includes TCR-125 SUPERPRO disc (dry cutting), transport case and accessories. facilitates transport and handling.

	REF	\triangle		RPM	5		≓	Ø	0			
TC-125	50953	SUPER	√ 13800	17000	220-240V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1
		PRO	V	√ 13800	50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	
TC-125	51957	SUPER	-1	√ 13800	110-130V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	
USA		PRO	V		50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	1
TC-125	51959	SUPER	-1	√ 13800	220-240V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1
UK		PRO	V		50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	
TC-125	51961	SUPER	√ 13800	110-130V	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 15/16x94 1/8x81 1/8"	31 Lb	1	
UK		PRO		12000	50-60Hz	20-25 mm	14-18 mm	115-125 mm	22.2 mm	330x239x206 cm	14 kg	1





TC-125 CIRCULAR CUTTER KIT

For cutting all types of ceramic and porcelain sheets. Suitable for use with natural and sintered stone. Especially suitable for large tiles.



	1		ı	1			1					-0			
	REF	\triangle		5	RPM	W			⇌	\varnothing	\otimes				
KIT CORTADORA CIRCL	JLAR TC-:	125 230V 50⁄6	60HZ (ANT	ERIOR REF. 5	1901 = NUE	VA REF. 50	953 + 5197	79]							
TC-125 230V 50/60HZ CUTTER	50953	SUPERPRO	\checkmark	220-240V 50-60Hz	13800	1250 W	126" 320 cm	13/16-1" 20-25 mm	9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	-
KIT TC-125 GUIDES, SUCTION CUP	51979	SUPERPRO	\checkmark											1	-
KIT CORTADORA CIRCL	JLAR TC-:	125 230V 50⁄6	SOHZ (ANT	ERIOR REF. 5	1902 = NUE	VA REF. 51 ^t	959 + 5197	9]							
TC-125 230V 50/60HZ UK CUTTER	51959	SUPERPRO	$\sqrt{}$	220-240V 50-60Hz	13800	1250 W	126" 320 cm	13/16-1" 20-25 mm	9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	-
KIT TC-125 GUIDES, SUCTION CUP	51979	SUPERPRO	$\sqrt{}$											1	-
KIT CORTADORA CIRCL	JLAR TC-:	125 230V 50⁄6	SOHZ (ANT	ERIOR REF. 5	1904 = NUE	VA REF. 51	961 + 5197	9]							
TC-125 110V 50/60HZ UK CUTTER	51961	SUPERPRO	\checkmark	110-130V 50-60Hz	13800	1250 W	126" 320 cm	13/16-1" 20-25 mm	9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	-
KIT TC-125 GUIDES, SUCTION CUP	51979	SUPERPRO	\checkmark											1	-
KIT CORTADORA CIRCL	JLAR TC-:	125 230V 50⁄6	SOHZ (ANT	ERIOR REF. 5	1903 = NUE	VA REF. 519	957 + 5196	9]							
TC-125 120V 50/60HZ USA CUTTER	51957	SUPERPRO	\checkmark	110-130V 50-60Hz	13800	1250 W	126" 320 cm		9/16-11/16" 14-18 mm	4 1/2-5" 115-125 mm	7/8" 22.2 mm	129 15/16x94 1/8x81 1/8" 330x239x206 cm	31 Lb 14 kg	1	18
KIT TC-125 GUIDES, SUCTION CUP	51969	SUPERPRO	√											1	-

- Equipped with a carbon steel slide on adjustable stainless steel radial bearings.
- 2 Double dust reduction/control system. Dry and wet cutting.
- Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). FAST adjustment system.
- More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- · Compatible with discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type).
- · Switch with safety lock. Prevents unintentional start-up. Electrical cable with PRCD.
- · Direct connection to [32 mm diameter] vacuum cleaner. Includes adapter for (37, 42 and 50 mm diameter).
- Quick connection and regulating valve for hose** (16 mm diameter). Rubber stopper for suction outlet. Improves ergonomics during wet cutting.
- · Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- · Tilting side guard for mitre cuts. reduces water splashing and improves dust suction.
- · Includes TCR-125 SUPERPRO disc (dry cutting), transport case and accessories. Facilitates transport and handling.

	Accessories
	Ref. 18913 Slim System Cutter Guide 110cm.
	Ref. 18879 SLIM CUTTER PLUS CAR SET
	Ref. 54918 Slab breaker pliers
-	Ref. 18934 Slab Trolley

























SLAB TRANS HEAVY DUTY N

Especially suited for handling thicker sheet tiles.


















	REF	\triangle				
SLAB TRANS HEAVY DUTY N	18982	PREMIUM	149 5/8x66 15/16x9 5/16" 380x170x23.7 cm	78 Lb 35.4 kg	1	1

Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity of 170 kg.





- 3 Equipped with four retractable and removable Soft-Grip handles to adapt to every situation during installation. Six light colored vacuum suction cups that does not leave marks on the tile. Increased load capacity.
- 4 Fast and easy to assemble and disassemble. Easy fix system.
- · Black anodized finish.
- · With a maximum load capacity of 70kg at maximum length.
- · Maximum load capacity: 170 kg.
- · Dimensions: 3800x1700x237 mm. (assembled and deployed).
- · Maximum handling size: 360 x 160 cm.
- · Unitary box with RUBI's flexography and full-colour label.

	Accessories
8	Ref. 18979 Vacuum suction pad SLAB TRANS HEAVY DUTY N
S	Ref. 21955 supplementary vacuum suction cup for guide set
-	Ref. 18934 Slab Trolley



































(o)

SLIM EASY TRANS PLUS

For transporting of large-format sheet tiles.



- · Includes 2 retractable and adjustable guides of 170 to 320 cm of reinforced aluminium and six 20 cm suction cups (ref. 18827) with high load capacity. Provide added safety and reliability.
- The optimal recommended gripping distance is 700 mm (distance between handles).
- · The soft-grip handles can slide and be removed through the top slot of the guides.
- · Multiple position settings for the suction cups.
- · Each guide is suitable for working individually, with a maximum load capacity of 40kg at their maximum length.
- · Maximum load capacity: 80 kg.
- · For workpieces with a maximum length of 3.2m.

	Accessories
#	Ref. 18819 Slim EASYTRANS / SLIM EASYTRANS PLUS supplementary guide set
2	Ref. 21955 supplementary vacuum suction cup for guide set
8	Ref. 18979 Vacuum suction pad SLAB TRANS HEAVY DUTY N













	REF	\triangle				
SLIM EASY TRANS PLUS	18976	SUPERPRO	651 3/16x100x89 3/4"	53 Lb	1	1
JLIM EAST IRANS PLUS	10970	JUPERPRU	1654x254x228 cm	24 kg	1	1

Adding more suction cups does not increase the load capacity.



XX

SLIM EASY TRANS

To transport large porcelain slabs.

- \cdot This system can be used as a complement to the Slim cutter
- · Includes two retracting guides adjustable from 160 to 320 cm and 10 suction cups for securing rough and smooth surfaces (Ref.66929).
- · Maximum load of the unit: 60 kg.
- · For workpieces with a maximum length of 3 m.

Accessories. Ref. 18819 Slim EASY TRANS / SLIM EASY TRANS PLUS supplementary













	REF	\triangle			
SLIM EASY TRANS	18910	SUPERPRO	36.6 Lb 16.6 kg	1	12

For every two suction cups (Ref. 18915), the load is increased by 10kg. Up to a maximum of 110kg, using 10 suction cups.

































(

SLAB TRANS MINI

For transporting ceramic sheets and large-format tiles with a maximum recommended size of 150 x 150 cm.

















REF SLAB TRANS MINI 18983 SUPERPRO 1

- I Ideal for medium formats. It adds less weight to the tile conveyor assembly when transporting medium-sized formats.
- 2 Retractable aluminium guide. Allows us to handle and transport tiles between 100 cm and 210 cm in size. Especially recommended for formats of up to 150 x 150 cm, 6 or 8 mm thick, used diagonally.
- Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- 2 interchangeable 020 cm suction cups, can be placed at any point on the guide.
- · Suction cups with a safety indicator.
- · Each suction cup, of 20 cm in diameter and with a high-load capacity, has an indicator that warns us in the event of a loss of
- · The suction cups have a protector to prevent damage during transport..

	Accessories
11	Ref. 16909 SLAB TRANS MINI SUPPORT FOR TABLE



XX








#

()





- · With the supplementary guide set we increase the maximum load capacity to 120kg.
- · Increases the rigidity of the unit.
- · Facilitates handling of the pieces.
- · Fast and easy to assemble and disassemble.
- · Black anodized finish.





· The suction cup addition is an accessory compatible only with SLAB TRANS HEAVY DUTY N (Ref. 18982), SLIM EASY TRANS PLUS (Ref. 18976) and SLAB TRANS MINI (Ref. 18983). The suction cup can be fixed to any type of surface without leaving a mark on the part. Its use allows the suction cups to be replaced while maintaining the original maximum load capacity of the transporter at all times.

	REF	\triangle		
VACUUM SUCTION PAD SLAB TRANS HEAVY DUTY N	18979	PREMIUM	1	1

SUPPLEMENTARY VACUUM SUCTION CUP FOR GUIDE SET



SLAB TRANS MINI SUPPORT FOR TABLE





NEW

- · Additional suction cup to place on the crossbars in the SLAB TRANS HEAVY DUTY N (Ref.18982) and SLIM EASY TRANS PLUS (Ref.18976) + CROSSBARS SET (Ref.18819).
- · Provides rigidity in the transport of very thin workpieces.
- · Facilitates the transport of cut workpieces.

	REF	\triangle	
SUPPLEMENTARY VACUUM	21055	PRFMIIIM	1
SUCTION CUP FOR GUIDE SET	21900	PREMIUM	1



NEW

- \cdot Solely for use with the SLAB TRANS MINI and the SLAB TABLE.
- · Helps to place the workpiece on the SLAB TABLE in the back buttering position without having to remove the conveyor.

	REF	\triangle	
SLAB TRANS MINI SUPPORT	1/000	SUPERPRO	1
FOR TABLE	10707	SUPERPRU	1



XX





(o)

Transport and handling system for large-format sheet tiles.



- · Transport system and manoeuvre for large format tiles.
- · Especially suitable for thicker/heavier slabs.
- Exclusive to the Slab trans HD (Ref.18936) and Slim easy trans systems (Ref.18910+18819).
- · Easy and quick to assemble and disassemble. Easy fix connection system.
- · Ultra light and compact.
- · Extendable support arm for greater ergonomics when loading and unloading pieces on the workbench.
- · Maximum load capacity: 140 kg (including material and trans system).









XX

PATENTED

SLAB TABLE

5 Set

Work bench for cutting and handling large-format sheet tiles using the SLAB SYSTEM range of tools.



- Workbench to support the cutting and preparation of large format materials using the tools of the Slab system range.
- Extra-reinforced bars thus increasing the rigidity of the workbench.
- The structure of the table together with the levelling feet achieves a greater stability of the set.
- · Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- · Folding legs. Equipped with security system against involuntary closing.
- · Dimensions in working position: 1800x1044x700 mm.
- · Dimensions in transport position: 1800x1044x198 mm.
- · Working height: 70 cm.
- · Maximum load capacity: 250 kg.

	Accessories.
THI	Ref. 21931 SLAB TABLE LENGTHEN ACCESSORY
医克克克氏 医克克氏氏	Ref. 21975 SLAB TABLE TILE LIFTING ACCESORY (C–15)



































(o)

SLAB TABLE VERSA-TILE



Work bench for cutting and handling large-format ceramic sheets, specifically designed for the SLAB range of tools. .





	REF	\triangle				
TADLE VEDCA. THE 100	10004	PREMIUM	70 7/8x60 1/4x33 1/16"	93 Lb	1	
SLAB TABLE VERSA-TILE	18984		180x153x84 cm	42 kg	1	-

- · Thanks to the shape of the legs and its structure, the table is very stable and sturdy even in its widest position. The adjustable feet ensure this stability, even on uneven floors.
- · Dimensions in working position: The table is extendable from 1100 to 1515 mm, which allows you to handle the widest formats. Its length is 1800 mm.
- · Its folding legs and two side wheels make it easy to transport and store.
- · Double working height: 70 and 84 cm, which means it can be adapted to different needs, allowing all types of work to be
- · Maximum load capacity: 260 kg. Even the largest tiles can be
- · Thanks to its two movable bars and wide T-shaped profiles, you can have a support surface that allows you to work as if on a workbench for the use of smaller tools, such as hand-held cutters, for example.

	Accessories:
TTT	Ref. 21931 Slab table lengthen accessory
<u> </u>	Ref. 21975 SLAB TABLE TILE LIFTING ACCESORY (C–15)



XX







#

()

XX



NEW

- · Accessory for the SLAB VERSA-TILE TABLE, it allows you to extend the table up to 3 m while maintaining its basic features.
- · Also compatible with the SLAB TABLE.

	REF	\triangle	
SLAB TABLE LENGTHEN	21931	PREMIUM	1
ACCESSORY	21751	PREMIUM	1



NEW

- · Makes it possible to lift the workpiece 4.5 cm from
- · Ideal for all types of cross-cutting and drilling

١		REF		
b	SLAB TABLE TILE LIFTING	21975	PREMILIM	
	ACCESORY (C-15)	21975	PREMIUM	1

TILE GAP CLOSER







- · For a precise and easy adjustment of the gap between tiles during floor or wall tiling.
- · Large diameter suction cups (150 mm) for any kind of tile surface (flat, rough, structured, etc.)
- For lateral displacement of tiles and gap reduction between 0 40 mm.
- Enables to equal the level of the tiles between 0 20 mm.
- · Maximum lifting capacity up to 100 Kg (220 lbs).

	REF	\triangle			*	
TILE GAP CLOSER	40074	חחח	18 7/8"	7.96 Lb	8.47 Lb	1
TILE UAP CLUSER	00720	60926 PRO	48X15X12 cm	3.61 kg	3.84 kg	1



RUBI TRILLER

RUBI

Compact manual vibrator.

Specifically designed for vibrating large-format sheet tiles.



- Compact manual vibrator especially designed for vibrating large format tiles.
 Expels the air trapped under the tile and maximises the
 - Expels the air trapped under the tile and maximises the adhesive coverage. (Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
 - · Suitable for use on floor and wall tiles.
 - Compact and light design weighing just 4.8 kg to facilitate work on walls.
 - Floating carbon steel chassis with vibration reduction system for greater user comfort.
 - · Easy to change, non-marking contact plate.
 - · Easy to operate tool with ergonomic double grip.
 - · Non-adjustable vibration frequency.
 - · Folded 1.5 mm steel sheet chassis, powder painted in red.
 - · Vibration plate made of PUR plastic, non-marking and easy to change.


















XX

(

İ

RM ROUGH SURFACE **SUCTION CUPS**







- · Suction cups for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- · Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle, for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 25 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle		
RM ROUGH SURFACE SUCTION	66929	SUPERPRO	1	280
CUPS	00727	JOI LIVI IVO	1	200

GSC-200 VACUUM SUCTION CUP



- · Suction cup for the manipulation of largeceramictiles and heavy porcelain slabs.
- · Adapts to any surface without leaving any marks.
- · Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- · Pressure relese mechanism.
- · Maximum load capacity: 110 kg.
- · High resistanceplastic body.

O		,			
		REF	\triangle	*	
GSC-200 VACUUN	1 SUCTION CUP	21951	PREMIUM	3.3 Lb 1.5 kg	1

RM ROUGH SURFACE DOUBLE SUCTION CUP



- · Double suction cup for handling ceramic tiles with rough and/ or slightly structured surfaces.
- · Injected polycarbonate body. Very light. Metal reinforcement in the lever base for greater tensile strength. Body made of highly resistant aluminium. rubber. Maximum load capacity: 55 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle		
RM ROUGH SURFACE DOUBLE	66952	SUPERPRO	1	96
SUCTION CUP				

TILE BEATING BLOCK



- · For a good settlement of tiles.
- · Waterproof and high wear resistance wood.
- · Perfect flatness.
- · Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm).
- · With white natural rubber sheet to prevent damage to the tile.

	REF	\triangle	
TILE BEATING BLOCK 40 X 14,5 CM. WITH RUBBER	72980	SUPERPRO	1

SUCTION CUP WITH VACUUM PUMP SC-200





- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 110kg.

	REF	\triangle	*		
SC-200 VACUUM PUMP	18919	PREMIUM	3.3 Lb	1	on
CUP	10717	PKLMIUM	1.5 kg	1	70

ERGO TILE BEATER





- · Tool for fixing large-format workpieces.
- · It facilitates the extraction of the air that remains between the tile and the adhesive.
- · With a bi-material handle for maximum comfort and ergonomics.
- · Metal plate for complete rigidity and long durability, reinforced with rubber to avoid damaging the ceramic tiles.
- · Exact, balanced weight.

	REF	\triangle	
ERGO TILE BEATER	28900	PREMIUM	1

































ELECTRIC TILE CUTTING

Electric cutters and mitre saws Circular saw and vacuum cleaner







SELECTION TABLE

WITH PLUNGE EFFECT

WITHOUT PLUNGE EFFECT





##




















PROFESSIONAL USE MOTOR 1,5 A 2 HP

INTENSIVE USE 3 HP MOTOR



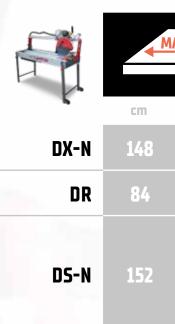

				4
DCX-XPERT	155	61"	750	1
TH PLUNGE EFFECT DC-PYTHON	120,5	48"	250	1
DV WITHOUT PLUNGE EFFECT	106	41 3/4"	200	8

DU-EVO	85	33"	
ND	∞		200



inch

58 7/16"

33"


13/16"

30

Q	3)	
mm	inch	
300- 350	12-14"	
250	10"	
250	10"	
200	8"	





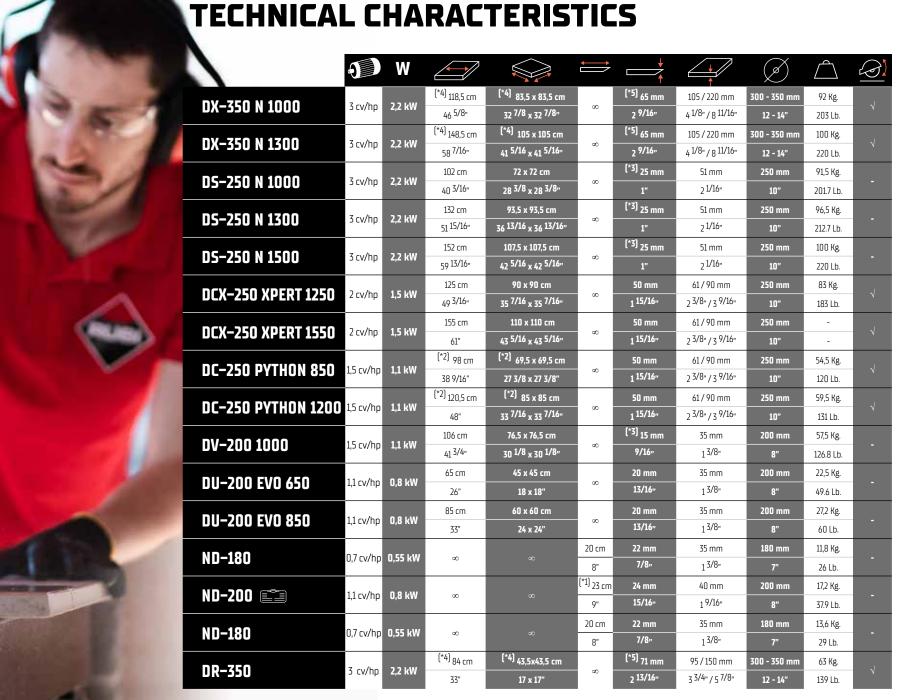

##

 \odot

Ġ

XX

^{(*2) 13/32&}quot; (10mm) thick material and plunge effect.

^(*3) With special decks for mitering. (*4) With 012" (300mm) blade, 13/32" (10mm) thick material and plunge effect.

^[*5] With 014" (350mm) blade. (*6) Saw head in the lowest position



DX-350 N




































Cutting capabilities may vary depending on the head position, special plates and disc diameter

Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.



3 Aluminium structure. Lighter cutter with maximum resistance to working conditions.

4 High performance plunge effect. Maximum cutting height.

- · Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- · Water pump refrigeration of blade with flow control valve.
- · Diamond blade 0 14" (350 mm) not included.
- · Allows the use of a 0 12" (300 mm) blade.
- · Adjustable mobile head with plunge effect capability.
- · Motor on top and belt transmission.
- · With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- · 2mW line laser.
- · Circular level for easy field installation.
- · Machine supplied without cable.
- · Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

	Accessories:
-	Ref. 51916 Tile Fixer DV/DC/DCX/DS/DX
3	Ref. 51915 Set of flanges Ø184mm DX-350
	Ref. Cables with plug

	REF	52905	52906			
DX-350 N 1000	Voltage	230V-50 Hz. 2	20V-60 Hz.			
1000	RPM	2800	3400			
	REF	52915	52916	52918		52928 NEW
DX-350 N 1300	REF Voltage	52915 230V-50 Hz. 2			52927 NEW 230V-50 Hz. 2.4HP	





曲



























DS-250 N

For wall tiles, floor tiles, porcelain tiles, marble, granite and other materials.



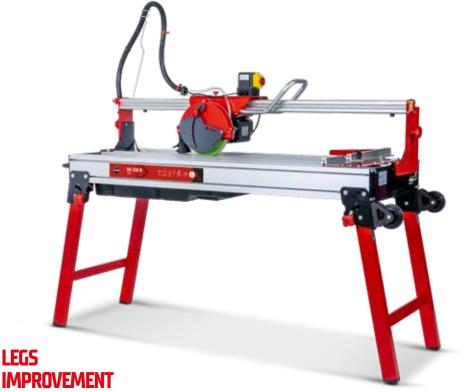



3 cv/hp






















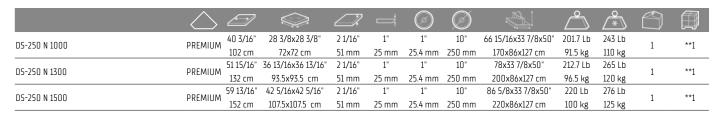

Cutting capabilities may vary depending on the head position, special plates and disc diameter.

- 2 Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- Wheels and handle included. Easy transport.
- 4 Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · Removable aluminium tables for easy cleaning of the machine.
- · With thermic security switch.
- · Water pump refrigeration of blade with flow control valve.
- · Diamond blade 010" (250mm) not included.
- \cdot With a double set of flanges, one especially designed for mitre cuts.
- · Motor assembly mounted on sliding bearings for maximum accuracy mitre cuts.
- · Safety protector for segmented blades.
- · With lateral stop for repetitive cuts.
- · Removable water tank system.
- · 2mW line laser.
- · Spirit level for easy field installation.
- · Machine supplied without cable.
- · Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

	Accessories:
-	Ref. 51916 Tile Fixer DV/DC/DCX/DS/DX
FT	Ref. 51914 Roller Table Extension DU/DC/DCX/DS/DX (from 2013)
	Ref. Cables with plug

	REF	52920	
DS-250 N 1000	Voltage	230V-50 Hz.	
	RPM	2800	
	REF	52930	
DS-250 N 1300	Voltage	230V-50 Hz.	
	RPM	2800	
	REF	52940	52942
DS-250 N 1500	Voltage	230V-50 Hz.	220V-60 Hz.
	RPM	2800	3400

曲

(o)

XX



DCX-250 XPERT

Suitable for intensive cutting of porcelain, stoneware and ceramic tile. For occasional cutting of natural stone such as marble or granite.









DCX-250 XPERT 1250

DCX-250 XPFRT 1550





PREMIUM

PRFMIIIM





52 3/8"

133 cm

64 3/16"





35 7/16x35 7/16" 2 3/8 / 3 9/16"

43 5/16x43 5/16" 2 3/8 / 3 9/16"

60 / 90 mm

60 / 90 mm

90x90 cm

110x110 cm



1 15/16"

1 15/16"

50 mm



25.4 mm 250 mm





192x74x130 cm 87 3/8x29 1/8x51 3/16" 190 Lb

222x74x130 cm





273 Lb

124 kg

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

- Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- 2 Reinforced cutting guide for a better cut
- 3 C3-PYTHON increases cooling efficiency and reduces water dispersion.
- 4 High performance plunge effect. Cutting height adjustment.
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- · Steel double settling system for improved efficiency and water
- · Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- · Includes reinforced folding legs with folding-prevention system and quick lock.
- · External and easy to remove water tank with 30 L capacity.
- · Includes improved splash guard system with auto-sliding protective cover.
- · Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- · Ergonomic bi-material handle for comfortable operation of the cutting head.
- · Earth integrated into the chassis.
- · Does not include power cable.
- · Not Supplied with a blade.

Accessories:
Ref. 51927
Set of flanges 0170mm DC PYTHON/DCX

	REF	52960	52961	52929 NEW	52962
DCX-250 XPERT 1250	Voltage	230V-50Hz.	110V-50Hz.	220V-60Hz.	120V-60Hz.
XPEKT 1250 -	RPM	2750	2750	3350	3350
	REF	52970	52971	52937 NEW	52972
DCX-250	Voltage	230V-50Hz.	110V-50Hz.	220V-60Hz.	120V-60Hz.
XPERT 1550	RPM	2750	2750	3350	3350





























DC-250 PYTHON

For cutting porcelain tiles and other materials.








































- 3 Patented ZERO DUST system exclusive to RUBI and certified by TNO, for safe exposure because of reduction of respirable dust particles generated during cutting.
- 4 C3 Pyhton cooling system. New adjustable refrigeration system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the refrigeration's efficiency and to reduce water dispersion.
- · Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- · Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45°.
- · Safety protector for turbo and segmented blades.
- · Blade cooling by water (50W water pump) with flow control.
- · Includes diamond blade CEV-SUPERPRO 0250 (*Ref. 56949 includes CPA- SUPERPRO 0250 blade).
- · Supplied without cable.

	REF	56941	56937	56938	
DC-250 PYTHON 850	Voltage	230V-50Hz	220V-60Hz	110V-50Hz	
F1111010 050	RPM	2790	2790	2790	
DC-250	REF	56939	56943	56947	56949
PYTHON	Voltage	230V-50Hz.	220V-60Hz.	110V-50Hz.	230V-50Hz.
1200	RPM	2790	2790	2790	2790





























DV-200

Cut & Drill

For all types of ceramic and porcelain tiles and other materials.

























DV-200 1000 SUPERPRO 41 3/4" 30 1/8x30 1/8" 1 3/8" 9/16" √ 8" 63x23 1/4x46	1/16" 133.4 Lb	1	**1
30FCRFRC 100 cm 76.5x76.5 cm 35 mm 15 mm V 200 mm 160x59x117	cm 60.5 kg	1	1

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.

- Set motor on sliding bearings for maximum accuracy and cut quality.
- ² C³ System, improves blade's cleaning and cooling for a higher performance.
- Removable aluminium tables for easy cleaning of the machine.
- Folding legs with built-in wheels for a more confortable transport.
- · Includes diamond disc CEV PRO Ø 200 mm.
- Direct motor, single phase 1.1 kW (1.5 HP) with thermal protector.
- · Water pump refrigeration of blade with flow control.
- · Reinforced chassis, greater structural rigidity.
- · Adjustable lateral stop (0 ° to 60 °) for repetitive cuts.
- · Large work area (100x48.5cm) suitable for large formats.
- · Working height of 84.5 cm. For improved user ergonomics.
- · Double Switch (ON/OFF) quick and easy access.
- · Foldable head at 45° for miter cuts that can cut up to 106 cm length.
- Equipped with C³ SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the
- · Machine supplied without cable.

	Accessories:
L =	Ref. 54999 Laser & Level Kit DV/DC/DCX/DS/DX
	Ref. 54993 Table Extension DV/DC/DCX
-	Ref. 51916 Tile Fixer DV/DC/DCX/DS/DX

DV-200 1000	REF	54911	54913	54914
	Voltage	230V-50 Hz.	110V-50Hz.	120V-60Hz.
	RPM	2790	2790	2790































DU-200 EVO

To cut ceramic and porcelain wall and floor tiles.









- Built-in foldable legs. Very easy to fix.
- With wheels and handle for a more comfortable transport and handling.
- 3 External water tank, easy to handle and clean.
- ³ System, improves blade's cleaning and cooling for a higher performance.
- · Motor assembly mounted on sliding bearings and foldable for
- · With lateral stop for repetitive cuts and adjustable square from 0 to 45°.
- · Direct drive motor with thermal protector and reinforced
- · Corrugated tube to protect power cable and water pipe.
- Equipped with C³ SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- · Bi-material handle, better ergonomics.
- · With CEV-SUPERPRO diamond disc Ø 200 mm.

Accessories
Ref. 5973 Cleaning Block
Ref. 5974 N-Cleaning Block























	\triangle				≓	(Ø				
DU-200 EVO 650	PRO	25 9/16"	17 11/16x17 11/16"	1 3/8"	13/16"	ما	8"	46 1/16x15 3/8x40 3/16"	49.6 Lb	1	0
DO 200 LVO 030	PNU	65 cm	45x45 cm	35 mm	20 mm	· ·	200 mm	117x39x102 cm	22.5 kg	1	7
חון סחס בעס סבס	nno	33 7/16"	24x24"	1 3/8"	13/16"	ا	8"	53 9/16x15 3/8x40 3/16"	60 Lb	1	,
DU-200 EVO 850	PRO	85 cm	60x60 cm	35 mm	20 mm	V	200 mm	136x39x102 cm	27.2 kg	1	

The displayed product may not correspond exactly with the actual model

	REF	55903	55905	55906	55907	55938	55939
DU-200 EVO 650	Voltage	230V- 50Hz.	230V- 50Hz. UK	110V- 50Hz. UK	120V- 60Hz. USA	220V- 60Hz.	240V- 50Hz. AUS.
LV0 030	RPM	2915	2915	2670	3200	3490	2915
	REF	54975	54976	54977			
DU-200 EVO 850	REF Voltage	54975 230V- 50Hz.	54976 120V- 60Hz. USA	230V-			





























(o)

ND-200

Cut & Drill

Portable cutter, ideal for finishings and renovations. For cutting ceramic tiles and other materials.





- Lightweight and compact, ideal for working in small spaces.
- 2 Stainless steel folding table. More durability.
- Fast positioning system at 45°. Easy to use.
- 4 Removable disk protector for vertical cuts. Simplifies creation of light boxes, frames, etc...
- · CEV-PRO 08" (200mm) diamond blade included.
- · Water refrigeration of the blade.
- · Lateral stop to allow repetitive cuts.
- · Electric cable: 4.9ft (1,5m).
- · Direct drive with thermal protector.



	1 9/16" 40 mm	<u></u> ∞			mm inch	C € ERI	UK
--	------------------	-----------	--	--	------------	---------	----

	\triangle			\Longrightarrow		0	Ø		ے		
ND 200	nnn			9"	1 9/16"	2/	8"	20 1/16x20 11/16x9 7/16"	37.9 Lb	1	0
ND-200	PRO	∞	∞	23 cm	40 mm	V	200 mm	51x52.5x24 cm	17.2 kg	1	

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.





XX

Cut & Drill

Portable cutter, ideal for finishings and renovations. For cutting ceramic tiles, ideal for floor and wall tiles.





- Water refrigeration of the blade.
- 2 With foldable table for mitre cutting up to 7 7/8" (20cm).
- 3 With lateral stop for repetitive cuts.
- 4 Guide for 45° cuts.
- · Single-phase motor.
- · For wall tiles, floor tiles and other materials.
- · Diamond blade 07" (180mm) included.
- · With thermic security switch.
- · Electric cable: 4.9ft (1,5m).
- · Model with carry case, supplied with 2 blades. (Ref. 25945, 25964, 24956)


























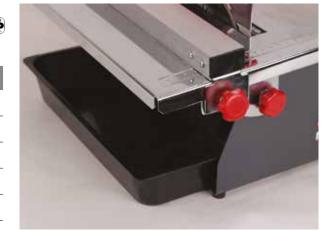



##

























DR-350

Cut & Drill

For all types of building materials like: masonry bricks, facade bricks, fireproof bricks, marble, granite and ceramic tiles.



- Head with high performance plunge effect. Large cutting capacity.
- 2 Equipped with ZERO DUST system. Tested and certified by TNO.
- 3 Large table for a larger work surface and comfort.
- 4 Steel structure robustness. Increased resistance to the demands of intensive work.
- · Equipped with protective safety system for segmented blades.
- · With thermal protector. Except three-phase motors.
- · Adjustable head to 45°.
- · Large table 23 1/16"x19 1/2" (58.5x49.5cm).
- · Blade refrigeration by water pump with integrated regulation
- · Diamond blade 012-14" (300-350mm) not included.
- · Machine supplied without cable.
- · Direct drive.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector.

Accessories
Cables with plug























					x1/x1	\varnothing			<u> </u>		
DR-350	SUPERPRO	28 1/8"	33 1/16"	17 1/8x17 1/8"	3 3/4 / 5 7/8"	12-14"	45 1/4x27 3/16x52 3/16" 115x69x132.5 cm	139 Lb	2/	1	**1
טככ־אט	JUPERPRU	71.5 cm	84 cm	43.5x43.5 cm	95 / 150 mm 3	00-350 mm	115x69x132.5 cm	63 kg	V	1	1

	REF	56940	56942
DR-350	Voltage	230V-50 Hz.	220V-60 Hz.
	RPM	2800	2800

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.

Ref. 56948 [3F]: 4 CV/HP.



曲

()

Ġ

XX





<u></u>

ACCESSORIES FOR ELECTRIC CUTTERS

• Accessories for electric cutters.


CLEANING BLOCK



N-CLEANING BLOCK







	REF	\triangle	
CLEANING BLOCK	05973	SUPERPRO	5



· Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.

	REF	\triangle	
N-CLEANING BLOCK	05974	SUPERPRO	5

SET OF FLANGES FOR MITRING CUTS.



- · Great accuracy when making miters cuts.
- · Available in several models.

	REF	\triangle	
SET OF FLANGES 0184MM DX-350	51915	SUPERPRO	1
SET OF FLANGES 0170MM DC PYTHON/DCX	51927	SUPERPRO	1
SET OF FLANGES Ø130MM DV/DC/DCX/ DX-250	57991	SUPERPRO	1

TABLE EXTENSION





- · Maximum weight: 22Lb, (10kg).
- · Available in several models.

	REF	\triangle	
TABLE EXTENSION DS/DX (FROM 2014)	54991	SUPERPRO	1
TABLE EXTENSION DV/DC/DCX	54993	SUPERPRO	1



XX

TILE FIXER DV/DC/DCX/DS/





曲

(o)

XX





· Accessory adaptable to DV,DC,DS and DX series (up to 2009].

	REF	\triangle	
TILE FIXER DV/DC/DCX/DS/DX	51916	SUPERPRO	1



· With rollers to simplify movement of the tiles.

· With adjustable foldable legs.

· Work surface 26 9/16"x22 5/8" [675x575mm] and maximum weight 154lb

· Installation on both sides of the machine.

	REF	\triangle	
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX (FROM 2013)	51914	SUPERPRO	1



LATERAL STOP FOR DC/DCX/ DS/DX



- · Lateral Stop 19 11/16" (50cm).
 - · Facilitates positioning of the tile, while reducing the percentage of errors.
 - · Accessory adaptable to DW-250-NL (up to 2012).

, ,		,	
	REF		
LATERAL STOP FOR DC/DCX/DS/DX	54822	SUPERPRO	1

- · For fixing large format tiles.
- · Adjustable to the maximum length of electric cutter.
- · Tile is held laterally thus avoiding any movement.
- · Especially suitable for blocking and execution of repetitive miter.

	REF	\triangle	
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/	54844	SUPERPRO	1
DS/DX	34044	JUPEKPKU	1

LASER & LEVEL KIT DV/DC/ DCX/DS/DX







- · Kit includes:
- · Circular bubble level to facilitate proper positioning of the electric cutter.
- · Laser Tracer indicating the passage of the disc and facilitates placement of material.
- · Laser power: 2 mW
- · Laser Class: 2

	REF	\triangle	
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	SUPERPRO	1

(o)


××





ELECTRIC CUTTING AND MITERING SAWS





· Approximate length 3.5m.

	REF	\triangle	5	
CABLE WITH PLUG	58850	SUPERPRO	230V - 50 Hz.FUR	1
230/50 EUR	20020	JUPERPRU	23UV - 3U HZ.EUR	1
CABLE WITH PLUG	58851	SUPERPRO	380v-50 Hz.EUR	1
380/50 EUR	20021	JUPEKPKU	JOUV-JU HZ.EUK	1
CABLE WITH PLUG	58852	SUPERPRO	110v-50 Hz.UK	1
110/50 UK	20022	JUPERPRU	אט.גח טכ־עטוו	
CABLE WITH PLUG	58853	SUPERPRO	230V-50 Hz.UK	1
230/50 UK	ככססכ	SUPERPRU	25UV-5U H2.UK	1
CABLE WITH PLUG	58854	SUPERPRO	120V-60 Hz.15 A	1
120/60 15A 12AWG USA	20024	SUPERPRU	12AWG USA	1
CABLE WITH PLUG	58856	SUPERPRO	220V-60 Hz.15 A	1
220/60 15A 12AWG USA	20020	SUPERPRU	12AWG USA	1
CABLE WITH PLUG	58863	SUPERPRO	230v - 50 Hz. 10A	1
230/50 10A AUS	20002	JUPEKPKU	AUSTR.	1

	FLANGES INCLUDED	ACCESORIES AVAILABLE	USE
DX-350 N	Ø 90 mm	0 68 mm	INCREASED CUTTING THICKNESS
א טכב-אם	וווווו טיק ש	0 184 mm	MITER CUT
DS-250 N	Ø 90 mm		MITER CUT
D3-230 N	Ø 138 mm		MITER CUT
DCX-250 XPERT	0 90 mm	0 130 mm	MITED CUT
DCA-230 APERI	וווווו טיפ ש	MITER CU 0 170 mm	
DC DCC DVTUON	0.00	0 130 mm	MITTER CUIT
DC-250 PYTHON	0 90 mm	0 170 mm	MITER CUT
DV-200 1000	0 90 mm	Ø 130 mm	MITER CUT
DU-200 EVO	0 65 mm	-	-

FLANGE AVAILABLE

FI ANGES

2 250 0 170 mm

ELECTRIC CUTTING AND MITERING SAWS

	ND	DU-EVO	DV-200	DC-250 Python	DS-250	DCX-250 XPERT	DX-350	DR-350
				<u>r</u> 4 7	7			<u> </u>
N-CLEANING BLOCK	05974	05974	05974	05974	05974	05974	05974	05974
CLEANING BLOCK	05973	05973	05973	05973	05973	05973	05973	05973
SET OF FLANGES FOR MITERING CUTS			57991	57991		57991	51915	
SET OF FEARING COTS			5///1	51927		51927	51/15	
ROLLER TABLE EXTENSION			51914	51914	51914	51914	51914	
TABLE EXTENSION			54993	54993	54991	54993	54991	
TILE FIXER DV/DC/DCX/DS/DX			51916	51916	51916	51916	51916	
LATERAL STOP FOR DC/DCX/DS/DX				54822	54822	54822	54822	
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX				54844	54844	54844	54844	
LASER & LEVEL KIT DV/DC/DCX/DS/DX			54999		54999	54999	54999	

























(o)

CIRCULAR SAW TC-180

Cut & Drill





	REF	\triangle		RPM	W	5		Ø	Ø		0	Å			
TC-180	50939	SUPERPRO	2/	5800	1000 W	230V / 50-60Hz	2 3/16"	7"	7/8"	13x17 11/16x14 15/16"	2/	14.8 Lb	24 Lb	1	10
1C-100	30737	SUPERPRU	V	2000	1000 W	2301/30-00112	55 mm	180 mm	77.7 mm	33x45x38 cm	V	67 kg	11 kg	1	10

- Practical cutter and easy to use for large
- 2 Double cooling system, wet and dry. Greater adaptability to environment.
- **3** Guiding mark for better visibility of the line of cut.
- 4 Easy adjustment of cutting thickness. Greater versatility and adaptability to the different materials.
- · Especially suitable for large pieces.
- · Allows the user to reduce manipulation, handling heavy or akward use.
- · Content:
- Blade Ø180mm TCR-180 SUPERPRO.
- Parallel guide.
- Cable with PRCD switch (differential).
- Cone reducer for vacuum cleaner.
- Transport case.

Accessories:
Ref. 50957 Guide connector
Ref. 50958 Fixing C-clamp
TC-180 Guides





XX



#

⊙

XX

ACCESSORIES FOR CIRCULAR SAW TC-180



- · Kit includes:
- 1 x Circular Cutter TC-180 230V 50/60Hz (Ref. 50939), 1 x Blade TCR-180 (Ref. 31975), 2 x Guide 80 cm. for TC-180 (Ref. 50956), 1 x Connector guides (Ref. 50957), 2 x Fixing Clamps (Ref. 50958).

	REF	\triangle		
TC-180 230V/50-60HZ KIT	50994	SUPERPRO	1	8

TC-180 GUIDES





- · Aluminium Guide for straight cuts.
- · Ability to connect multiple guides through the connector [Ref. 50957].

	REF	\triangle	<u> </u>		
80CM GUIDE FOR	50956	SUPER	32 5/16x7 5/16x13/16"	2.78 Lb	1
TC-180 (31 1/2")	30730	PRO	82x18.5x2 cm	1.26 kg	1
120CM GUIDE FOR	50959	SUPER	47 5/8x7x13/16"	4 Lb	1
TC-180 (47 1/4")	לכלטכ	PRO	121x18x2 cm	1.8 kg	1


GUIDE CONNECTOR











	REF	\triangle	
GUIDE CONNECTOR	50957	SUPERPRO	1



· Highly recommended for fixing the guide on the tile and preventing movement through out the cut, thus achieving a cleaner cut.

	REF	\triangle	
FIXING C-CLAMP	50958	SUPERPRO	1



(

₫

PRO-EDGER BEVELLING AND MITRING ACCESSORY

Cut & Drill

Professional portable system for intensive use, especially designed for dry bevelling and mitring principally of large format tiles. It can bevel and mitre porcelain, ceramic and any natural stone material of any length.



	REF	\triangle		\Longrightarrow	≓	Ø			*		
PRO-EDGER PORTABLE BEVELING	16956	SUPERPRO	N.	∞	13/16"	M14 mm	14 15/16x8 1/4x6 11/16"	9 Lb	9.9 Lb	1	24
FRO EDULK FORTABLE DEVELING	10730	JOPENFINO	*	ω	20 mm	14114 111111	38x21x17 cm	4.1 kg	4.1 kg 4.5 kg	1	4
PRO-EDGER PORTABLE BEVELING USA	16901	SUPERPRO	٠١		13/16"	3/16 / 5/16"	14 15/16x8 1/4x6 11/16"	9 Lb	9.9 Lb		24
PRU-EDUER PURTABLE BEVELING USA	10901	JUPEKPKU	V	∞	20 mm	5/8 - 11 mm	38x21x17 cm	4.1 kg	4.5 kg	1	

- It makes mitre cuts at 45° up to a maximum thickness of 20 mm, and with no thickness limitation for bevelling.
- Progressive bevelling and mitring at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- 3 Compatible with 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an M14 threaded shaft and quick-fastening belt.
- Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- · Highly wear-resistant polyethylene slides.
- · A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- · Highly friction-resistant white polyethylene slides
- · Plastic handle.
- · Sealed single-row deep-groove ball bearings.
- · 45° x 20 mm grinding wheel included (ref. 16946).
- Compatible with ZERO DUST system by means of a clip for fixing a vacuum cleaner.
- · PVC plastic grinding wheel guard.
- Fixing to angle grinder by means of a 014mm (Ref. 16956) and 5/8"–11" (Ref. 16901) and quick fastening belt.
- Compatible with 115 & 125mm angle grinders with cable or battery up to 850 W. Up to 100 mm diameter handle.
- · Progressive wear bevelling and mitring is adjustable by 10 mm.
- · A damp cloth is recommended for cleaning.
- · Lubrication is not necessary.

	Accessories:
	Ref. Fine Grit PRO-EDGER mitring Wheel
50	Ref. Turbo Twist Coarse Grit PRO-EDGER mitring Wheel
	Ref. Fine Grit PRO-EDGER bevelling Wheel



XX

ACCESSORIES FOR BEVELLING AND MITRING

FINE GRIT PRO-EDGER BEVELLING WHEEL



FINE GRIT PRO-EDGER MITRING WHEEL



曲

⊙

××





- · Grinding wheel for bevelling.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- · Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	\triangle	0	Ø		RPM	
FINE GRIT R.5 PRO- EDGER BEVELLING	16957	SUPER	2 5/8"	0"	1/4"	12000	1
WHEEL	10737	PRO	66 mm	M16 mm	6 mm	max.	1
FINE GRIT R.10 PRO-FDGFR	16958	SUPER	3"	0"	7/16"	12000	1
BEVELLING WHEEL	10730	PRO	76 mm	M16 mm	11 mm	max.	1



- \cdot Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- · Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- \cdot 45° type tool with 1–2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	\triangle	\otimes	Ø		RPM	
45X20 SMOOTH FINE GRIT PRO-FDGER	14044	SUPER	3 11/16"	0"	13/16"	12000	1
MITRING WHEEL	16946	PRO	94 mm	M16 mm	20 mm	max.	1
45X15 SMOOTH FINE	16985	SUPER	3 5/16"	0"	9/16"	12000	1
MITRING WHEEL	10703	PRO	84 mm	M16 mm	15 mm	max.	1







- · Grinding wheel for mitring.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-FDGFR.

	REF	\triangle	Ø	Ø	11111	RPM	
TURBO TWIST COARSE GRIT PRO-EDGER	16984	SUPER	3 5/16"	0"	9/16"	12000	1
MITRING WHEEL 45X15	10704	PRO	84 mm	M16 mm	15 mm	max.	





##

(o)


<u>t</u>

AS-30 PRO VACUUM CLEANER

Cut & Drill

To vacuum wet or dry.









- · For wet and dry vaccuming.
- · Power: 1400 W.
- · Airflow: 58 I / s.
- · Vacuum: 180 mbar. (18 psi.)
- · Capacity: 30 I.
- · Double switch: On / Off and automatic start.
- · Socket for electric tool (max.2000W)
- · Electrical cable: 4 m.
- · Accessories included:
- Hose, nozzle (35/37 mm) and crevice tool.
 - Steel pipes.
- Wet brush.
- Filter damp sponge for wet.
- HEPA filter for dry.

Accessories:
Ref. 50964 AS–30 PRO Vacuum Cleaner Paper Bag.
Ref. 50998 AS–30 PRO Vacuum Cleaner Dry Filter
Ref. 50999 AS-30 PRO Vacuum Cleaner Wet Filter.







	REF		, <i>5</i>			
AS-30 PRO VACUUM CLEANER	50962	PRO	210-240V/50-60 Hz ²	5 3/16x14 15/16x14 15/16" 64x38x38 cm	1	9





XX

ACCESSORIES AS-30 PRO

· Range of accessories compatible with AS-30 PRO vacuum cleaner.

AS-30 PRO VACUUM CLEANER PAPER BAG.





- · Paper bag for dust vacuuming.
- · Compatible with AS-30 PRO.
- · Biodegradable.
- · 4 units set.

	REF	\triangle	
AS-30 PRO VACUUM CLEANER PAPER BAG.	50964	PRO	1

AS-30 PRO VACUUM CLEANER DRY FILTER







- \cdot HEPA filter for dry vacuuming.
- · Compatible with AS-30 PRO.
- · Minimum particle size: 5 µm.

	REF	\triangle	
AS-30 PRO VACUUM CLEANER DRY FILTER	50998	PRO	1


AS-30 PRO VACUUM CLEANER WET FILTER.





- · Filter for wet vacuuming.
- · Compatible with AS-30 PRO.
- · 2 units set.

	REF	\triangle	
AS-30 PRO VACUUM CLEANER WET FILTER.	50999	PRO	1

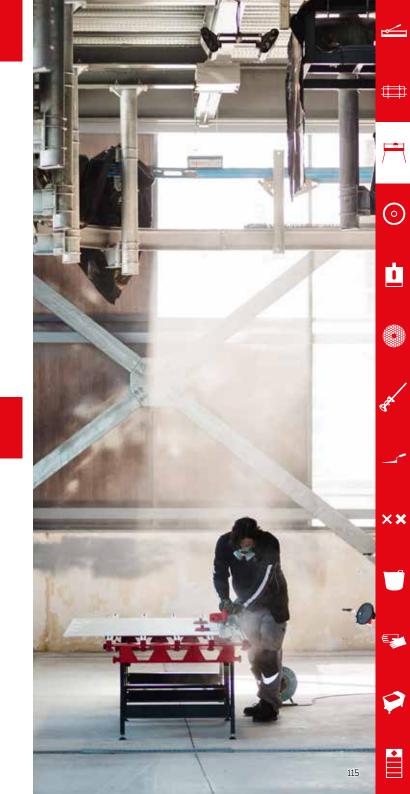



(

İ


RUBI CLEAR DUST EXTRACTOR M

Wet and dry vacuuming with the same machine and specific accessories for optimisation. For dry and wet extraction work in areas where very fine dust is generated by cutting, such as hardwood, paint, plastics, cement and brick (type M dust).









- · Autoclean system that automatically shakes the filter.
- · M- Class certified, it vacuums up 99.9% of airborne particles, including wood (hard and soft), plaster, plasterboard, Corian, paint, plastics, cement and brick.
- · Power socket for automatic start and stop in synchronisation with the tool being used (2000 W max.).
- · Metal wheels reinforced with rubber and with an optimum radius for moving on uneven ground.
- · Agile and compact. 20L tank and an extra-long handle.
- · Included:
- · Blue anti-foam filter for vacuuming liquids.
- · 3-metre suction hose.
- · Extendable plastic tube.
- · two multifunctional brush bases.
- · Brush for hard floors.
- · Brush for working with liquids.
- · Flat nozzle for corners.
- · Rubber adapter.
- · Consumables included:
- · Three 20L bags.
- · M- Class polyester cartridge filter.

	Accessories
	Ref. 51989 Rubi Clear Dust Extractor Filter
•	Ref. 51997 Rubi Clear Dust Extractor Bag (5 UN)



XX

NEW

RUBI CLEAR DUST EXTRACTOR FILTER

RUBI CLEAR DUST EXTRACTOR BAG (5 UN)







EXTRACTOR M



NEW

- · Filter for dry vacuuming and M- Class filtration.
- · Specifically designed for the Clear vacuum cleaner.
- · IFA certification.

	REF	\triangle
EAD DIIST EVTDACTOD EILTED	51000	DDEWIIIM



NEW

- · Filter bag for M-Class dust extraction.
- · Designed specifically for the Clear vacuum cleaner.
- · Closure designed for proper waste management and subsequent sealing (regulated in the cleaner's M-Class certification).
- · Pack of 5 units.
- · IFA certification.

		REF	
RUBI CL	LEAR DUST EXTRACTOR BAG (5 UN)	51997	PREMIUM





























DIAMOND BLADES

Dry cutting diamond blades Wet cutting diamond blades









DIAMOND

CUT

BLADES - DRY

• Diamond blades without need of water for cooling.

























GENERAL PURPOSE SEGMENTED DIAMOND BLADE (STT)













- Recommended blade for cutting all types of building materials, included Reinforced concrete. High performance and speed of cutting.
- · For cutting materials > 25 mm thickness.

	REF	\triangle	Ø	Ø		٥	RPM	
STT 115 SUPERPRO	30974	SUPERPRO	7/8" 22.2 mm	4 1/2" 115 mm	1/16" 2.2 mm		13300 max.	5
STT 230	30976	SUPERPRO	7/8"	9"	1/16"	3/8"	6650	1
SUPERPRO	30770	201 EI(1 1(0	22.2 mm	230 mm	2.2 mm	10 mm	max.	1

- Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" [25 mm] thickness.
- Perforated steel blade to improve cooling and diminish cut's tensions.

	REF	\triangle	\varnothing	\otimes		٥	RPM	
SEV 115 PRN	25915 PRC	nnn	4 1/2"	7/8"	1/16"	5/16"	13300	5
2EA 112 5KO		PRU	115 mm	22.2 mm	1.6 mm	8 mm	max.	7
SEV 125 PRO 32940	Z20/:N	PRO	5"	7/8"	1/16"	5/16"	12250	
	32740	PRU	125 mm	22.2 mm	1.6 mm	8 mm	max.	7
SEV 230 PRO	25916	PRO	9"	7/8"	1/16"	5/16"	6650	1
	73410	PRU	230 mm	22.2 mm	2.3 mm	8 mm	max.	1



GENERAL PURPOSE TURBO DIAMOND BLADE (TSV)

2 Cut & Drill

CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CSV)



HARD MATERIALS TURBO DIAMOND BLADE VIPER (TVR)

















- Recommended for cutting building materials such as bricks, concrete, terrazzo.
- \cdot A great combination. High performance and cutting speed with high standard finishes.

	REF	\triangle	Ø	Ø		٥	RPM	
TSV 115	25917	PRO	4 1/2"	7/8"	1/16"	5/16"	13300	Е
PRO	23717	PKU	115 mm	22.2 mm	2 mm	8 mm	max.	
TSV 230	25918	PRO	9"	7/8"	1/8"	5/16"	6650	1
PRO	23918	PRU	230 mm	22.2 mm	2.5 mm	8 mm	max.	1
TSV 125	71000	SUPER	5"	7/8"	1/16"	5/16"	12250	5
SUPERPRO	PRO 31982	PRO	125 mm	22.2 mm	2 mm	8 mm	max.	ر ر

- · Blade for general cut of ceramic tiles as wall tile, floor tiles, porcelain.
- · The best finish. To cut ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

	REF	\triangle	\varnothing	Ø	P	٥	RPM	
CSV 115	25910	DD0	4 1/2"	7/8"	1/16"	5/16"	13300	5
PRO	23910	PRO	115 mm	22.2 mm	1.6 mm	8 mm	max.	כ
CSV 125	31915	PRO	5"	7/8"	1/16"	5/16"	12250	5
PRO	21712 1	PKU	125 mm	22.2 mm	1.6 mm	8 mm	max.	כ
CSV 115	30882	SUPER	4 1/2"	7/8"	1/16"	5/16"	13300	5
SUPERPRO	30002	PRO	115 mm	22.2 mm	1.6 mm	8 mm	max.	כ
CSV 125	30883	SUPER	5"	7/8"	1/16"	5/16"	12250	5
SUPERPRO	20002	PRO	125 mm	22.2 mm	1.6 mm	8 mm	max.	כ
CSV 230	30888	SUPER	9"	7/8"	1/16"	5/16"	6650	
SUPERPRO	20000	PRO	230 mm	22.2 mm	1.9 mm	8 mm	max.	1

- · Recommended blades to cut hard materials such as granite, slate, quartzite, rustic tiles, klinker and porcelain tile.
- · Robust blade, ready to support high tensions in the extremes of the blade.
- · For cutting materials > 3/4" (20 mm) thickness.
- · High cutting speed.
- · Reinforced blade.
- · Is suitable for miter cuts.

	REF	\triangle	0	0	P	٥	RPM	
TVR 115	30986	SUPER	4 1/2"	7/8"	1/16"	3/8"	13300	5
SUPERPRO	JU700	PRO	115 mm	22.2 mm	1.4 mm	10 mm	max.	,
TVR 125	30987	SUPER	5"	7/8"	1/16"	3/8"	12250	Е
SUPERPRO	30707	PRO	125 mm	22.2 mm	1.4 mm	10 mm	max.	

































- · Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- · Only for straight cuts, not suitable for mitering.

	REF	\triangle	Ø	Ø		٥	RPM	
TVA 115	31932	SUPER	4 1/2"	7/8"	1/16"	3/8"	13300	5
SUPERPRO	31732	PRO	115 mm	22.2 mm	1.4 mm	10 mm	max.	
TVA 125	31933	SUPER	5"	7/8"	1/16"	3/8"	12250	5
SUPERPRO	31733	PRO	125 mm	22.2 mm	1.4 mm	10 mm	max.	
TVA 180	31934	SUPER	7"	7/8"	1/16"	3/8"	8500	3
SUPERPRO	31734	PRO	180 mm	22.2 mm	1.6 mm	10 mm	max.	
TVA 230	31935	SUPER	9"	7/8"	1/16"	3/8"	6650	1
SUPERPRO	21723	PRO	230 mm	22.2 mm	1.6 mm	10 mm	max.	1

- \cdot Recommended for cutting high hardness natural stones such as granite, basalt, quartzite, concrete drive, etc.
- · Long life and high performance. Bar of 12 mm.
- · High speed cutting.
- · For cutting materials > 25 mm thickness.

	REF	\triangle	\varnothing	Ø		٥	RPM	
SCA 230	30904	SUPER	9"	7/8"	1/8"	1/2"	6650	1
SUPERPRO	30704	PRO	230 mm	22.2 mm	3 mm	12 mm	max.	1

- · Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · The best finish.

	REF	\triangle	\varnothing	0		٥	RPM	
CPR 115	Z0070	SUPER	4 1/2"	7/8"	1/16"	5/16"	13300	5
SUPERPRO	30972	PRO	115 mm	22.2 mm	1.7 mm	8 mm	max.	٠,
CPR 125	70077	SUPER	5"	7/8"	1/16"	5/16"	12250	_
SUPERPRO	30973	PRO	125 mm	22.2 mm	1.7 mm	8 mm	max.	



##

 \odot

××

PORCELAIN TILES TURBO DIAMOND BLADE (TCR)

Cut & Drill

PORCELAIN TILES J-SLOT DIAMOND BLADE (CPJ)



PORCELAIN TILES DIAMOND BLADE 2CM (TPL)





#

<u></u>

<u>t</u>

XX







- · Recommended blade to cut fine porcelain tiles.
- · High performance and fast cutting speed with high quality finishes

REF	\triangle	Ø	\otimes	P	٥	RPM	
71077	SUPER	4 1/2"	7/8"	1/16"	5/16"	13300	5
31772	PRO	115 mm	22.2 mm	1.4 mm	8 mm	max.	י
71077	SUPER	5"	7/8"	1/16"	5/16"	12250	5
31773	PRO	125 mm	22.2 mm	1.4 mm	8 mm	max.	י
7107E	SUPER	7"	7/8"	1/16"	5/16"	8500	3
21772	PRO	180 mm	22.2 mm	1.6 mm	8 mm	max.	٥
71070	SUPER	9"	7/8"	1/16"	5/16"	6650	
317/0	PRO	230 mm	22.2 mm	2 mm	8 mm	max.	1
	REF 31972 31973 31975 31978	31972 SUPER PRO 31973 SUPER PRO 31975 SUPER PRO 31975 SUPER SUPER 31978 SUPER	31972 SUPER 4 1/2" PRO 115 mm 31973 SUPER 5" PRO 125 mm 31975 SUPER 7" PRO 180 mm 31978 SUPER 9"	31972 SUPER 4 1/2" 7/8" PRO 115 mm 22.2 mm 31973 PRO 125 mm 22.2 mm 31975 PRO 125 mm 22.2 mm 31976 PRO 180 mm 22.2 mm 31978 SUPER 9" 7/8"	31972 SUPER 41/2" 7/8" 1/16" PRO 115 mm 22.2 mm 1.4 mm 31973 SUPER 5" 7/8" 1/16" PRO 125 mm 22.2 mm 1.4 mm 31975 SUPER 7" 7/8" 1/16" PRO 180 mm 22.2 mm 1.6 mm 31978 SUPER 9" 7/8" 1/16"	31972 SUPER 4 1/2" 7/8" 1/16" 5/16" PRO 115 mm 22.2 mm 1.4 mm 8 mm 31973 PRO 125 mm 22.2 mm 1.4 mm 8 mm PRO 125 mm 22.2 mm 1.4 mm 8 mm 31975 PRO 180 mm 22.2 mm 1.6 mm 8 mm 31978 SUPER 9" 7/8" 1/16" 5/16"	31972 SUPER 4 1/2" 7/8" 1/16" 5/16" 13300 PRO 115 mm 22.2 mm 1.4 mm 8 mm max. 31973 PRO 125 mm 22.2 mm 1.4 mm 8 mm max. 31975 PRO 125 mm 22.2 mm 1.4 mm 8 mm max. 31976 PRO 180 mm 22.2 mm 1.6 mm 8 mm max. 31978 SUPER 9" 7/8" 1/16" 5/16" 6650

- · For cutting hard porcelain tiles with the best performance.
- · Specially recommended for straight cuts and high speed cutting.
- · Thanks to J-Slot typology, this disc increases cutting speed on very hard porcelain tiles, while reducing the stresses generated throughout out the cut.
- · It's original design is for dry cutting, but also allows wet cutting.

	REF	\triangle	Ø	Ø		٥	RPM	
CPJ 115	32932	SUPER	4 1/2"	7/8"	1/16"	5/16"	13300	Е
SUPERPRO	32732	PRO	115 mm	22.2 mm	1.4 mm	8 mm	max.	
CPJ 125	32933	SUPER	5"	7/8"	1/16"	5/16"	12250	_
SUPERPRO	32733	PRO	125 mm	22.2 mm	1.4 mm	8 mm	max.)

NEW

- · Specially designed for landscaping materials.
- · Ideal for cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm.
- · A great combination. High performance and cutting speed with high-quality finishes.
- · Suitable for dry cutting with the TC-125.

	REF	\triangle	\varnothing	Ø		٥	RPM	
TPL 115	40915	PRO	4 1/2"	7/8"	1/16"	5/16"	13300	Е
EXT PRO	40713	PRU	115 mm	22.2 mm	1.4 mm	8.5 mm	max.)
TPL 125	40916	PRO	5"	7/8"	1/16"	5/16"	12250	
EXT PRO	40710	PRU	125 mm	22.2 mm	1.4 mm	8.5 mm	max.)





Cut & Drill







NEW

- · Specially designed for landscaping materials.
- · Ideal for dry cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm with a grinder.
- · A great combination. High performance and cutting speed with high-quality finishes.
- \cdot Not suitable for dry cutting with the TC-125.

RE	F \bigcirc	Ø	0	P	٥	RPM	
TLG 115 EXT 4190	SUPER	4 1/2"	7/8"	1/16"	3/8"	13300	Е
SUPERPRO 4190	PRO	115 mm	22.2 mm	1.4 mm	10 mm	max.	
TLG 125 EXT 4190	SUPER	5"	7/8"	1/16"	3/8"	12250	Е
SUPERPRO 4190	PRO	125 mm	22.2 mm	1.4 mm	10 mm	max.	

· Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.

	REF		Ø	Ø		٥	RPM	
SON 230	zano	SUPER	9"	7/8"	1/8"	5/16"	6650	1
SUPERPRO	J27U0	PRO	230 mm	22.2 mm	2.6 mm	8 mm	max.	1

- · Recommended electroplated diamond blade to cut marble, limestone and fibers.
- · Less vibration. To cut those materials with high risk of breaking, as marble and fibers.

	REF	\triangle	0	0		٥	RPM	
EMG 115	30995	SUPER	4 1/2"	7/8"	1/16"	1/8"	13300	
SUPERPRO	70777	PRO	115 mm	22.2 mm	2.2 mm	3 mm	max.	,
EMG 230	30997	SUPER		7/8"		1/8"	6650	1
SUPERPRO	JU171	PRO	230 mm	22.2 mm	3 mm	3 mm	max	1

(

₫

XX

DIAMOND CUTTING & GRINDING (ECD)



DIAMOND CUTTING & GRINDING (TGS)



##

<u></u>

XX







- · Recommended disc for cutting all types of materials including metal, plastic and wood, and more.
- · Vacuum Brazed Technology.
- · Increased resistance to high temperatures during cutting, reduction of spark generated.
- · High speed and performance.

	REF	\triangle	\varnothing	\otimes	P	٥	RPM	
RSQ 115 SUPERPRO	30900	SUPER	4 1/2"	7/8"	1/8"	3/16"	13300	5
SUPERPRO	30700	PRO	115 mm	22.2 mm	2.8 mm	4 mm	max.	כ
RSQ 230 SUPERPRO	בחחחם	SUPER	9"	7/8"	1/8"	3/16"	6650	1
SUPERPRO	30902	PRO	230 mm	22.2 mm	3.0 mm	4 mm	max.	1

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- · For adjustment cuts and grinding on all types of porcelain and hard materials.
- · For cutting materials > 3/4" (20 mm) thickness.
- · Electroplated continous rim blade.
- · Two-sided and reversible blade for a better performance.
- · For grinders use. Connection: M14 thread.

	REF		0	0	P	٥	RPM	
ECD 115 2IN1	31964	SUPER	4 1/2"	0"	1/16"	1/4"	13300	5
SUPERPRO	31704	PRO	115 mm	M14 mm	1.8 mm	5.6 mm	max.	ב
ECD 125 2IN1	31965	SUPER	5"	0"	1/16"	1/4"	12250	Е
SUPERPRO	71703	PRO	125 mm	M14 mm	1.8 mm	5.6 mm	max.	ر

NEW

- · Disc for dry cutting and grinding.
- · For use with porcelain materials and natural stone.
- · A great combination. High performance and cutting speed with high-quality finishes.
- · Suitable for use with a grinder.

	REF		\otimes	\otimes		٥	RPM	
TGS 115	40917			7/8"		1"	13300	-
SUPERPRO	4091/	PRO	115 mm	22.2 mm	1.6 mm	25 mm	max.	٥
TGS 125	40918	SUPER	5"	7/8"	1/16"	1"	12250	Е
SUPERPRO	40710	PRO	125 mm	22.2 mm	1.6 mm	25 mm	max.	٥

































BLADES - WET CUT

· Diamond blades cooled with water.

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SHR)



CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CEV)







UNIVERSAL

CERAMIC MULTI-TILE

- · Blade for general cut of ceramic tiles as wall tile, floor tiles,
- \cdot The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" [20 mm]

	REF		. Ø	Ø		٥	RPM											
CEV 180	2012	nnn	7"	7/8-1"	1/16"	5/16"	8500	3										
PRO	25912	PRO	180 mm	22.2 - 25.4 mm	1.7 mm	8 mm	max.	٥										
CEV 200	25913	PRO	8"	1"	1/16"	5/16"	7650	1										
PRO	23713	PRU	200 mm	25.4 mm	1.7 mm	8 mm	max.											
CEV 250	25934	PRO	10"	1"	1/16"	5/16"	6150	1										
PRO	23734	PRU	250 mm	25.4 mm	2.2 mm	8 mm	max.											
CEV 180	30945	SUPER	7"	7/8-1"	1/16"	5/16"	8500	3										
SUPERPRO	30743	PRO	180 mm	22.2 - 25.4 mm	1.7 mm	8 mm	max.											
CEV 200	30946	SUPER	8"	1"	1/16"	5/16"	7650	1										
SUPERPRO	30740	PRO	200 mm	25.4 mm	1.7 mm	8 mm	max.	1										
CEV 250	30949	SUPER	10"	1"	1/16"	5/16"	6150	1										
SUPERPRO	30747	PRO	250 mm	25.4 mm	2.2 mm	8 mm	max.	1										
CEV 300	30950	SUPER	12"	1"	1/16"	3/8"	5100	1										
SUPERPRO	30730	PRO	300 mm	25.4 mm	2.2 mm	10 mm	max.											
CEV 350	70051	SUPER	14"	1"	1/8"	3/8"	4400	1										
SUPERPRO	30951	30951	30951	30951	30951	30951	30951	30951	30951	30951	30951	PRO	350 mm	25.4 mm	2.6 mm	10 mm	max.	1

- · Recommended for cutting building materials such as brick, concrete, terrazzo.
- \cdot The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" (25 mm) thickness.

	REF	\bigcirc	Ø	0	P	٥	RPM	
SHR 250	32974	PRO	10"	1"	1/8"	3/8"	6150	1
PRO	52974	+ PRU	250 mm	25.4 mm	2.6 mm	10 mm	max.	1
SHR 350	32971	SUPER	14"	1"	1/8"	3/8"	4400	1
SUPERPRO	327/1	PRO	350 mm	25.4 mm	3 mm	10 mm	max.	1

HARD MATERIALS CONTINUOUS RIM DIAMOND BLADE (CPA)

Cut & Drill

PORCELAIN TILES CONTINUOUS RIM DIAMOND BLADE (CPC)

Cut & Drill

PORCELAIN TILES J-SLOT DIAMOND BLADE (CPX)





##

<u></u>

<u>†</u>

XX







- · Recommended for cutting hard materials such granite, rustic tiles, klinker, firebricks or slate.
- · The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

cincinc.								
	REF	\bigcirc	0	0	P	٥	RPM	
CPA 180	30925	SUPER	7"	7/8"	1/16"	5/16"	8500	3
SUPERPRO	30723	PRO	180 mm	22.2 mm	1.7 mm	8 mm	max.	כ
CPA 200	30926	SUPER	8"	1"	1/16"	5/16"	7650	1
SUPERPRO	30720	PRO	200 mm	25.4 mm	1.7 mm	8 mm	max.	1
CPA 250	30929	SUPER	10"	1"	1/16"	5/16"	6150	1
SUPERPRO	30929	PRO	250 mm	25.4 mm	2.2 mm	8 mm	max.	1
CPA 300	30930	SUPER	12"	1"	1/16"	3/8"	5100	1
SUPERPRO	30730	PRO	300 mm	25.4 mm	2.2 mm	10 mm	max.	1
CPA 350	30931	SUPER	14"	1"	1/8"	3/8"	4400	1
SUPERPRO	20731	PRO	350 mm	25.4 mm	2.6 mm	10 mm	max.	1

- · Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · Specially recommended for mitre cutting.

	REF	\triangle	\otimes	\otimes	P	٥	RPM	
CPC 180	30955	PRO	7"	7/8-1"	1/16"	5/16"	8500	3
PRO	RO 30733		180 mm	22.2 - 25.4 mm	1.7 mm	8 mm	max.	
CPC 200	30956	PRO	8"	1"	1/16"	5/16"	7650	1
PRO	JU7JU	PRU	200 mm	25.4 mm	1.7 mm	8 mm	max.	1
CPC 230	30958	PRO	9"	7/8-1"	1/16"	5/16"	6650	1
PRO	30730	PKU	230 mm	22.2 - 25.4 mm	2 mm	8 mm	max.	1
CPC 250	30959	PRO	10"	1"	1/16"	5/16"	6150	1
PRO	70777	PRU	250 mm	25.4 mm	2.2 mm	8 mm	max.	1
CPC 300	30960	PRO	12"	1"	1/16"	3/8"	5100	1
PRO	JU700	PRU	300 mm	25.4 mm	2.2 mm	10 mm	max.	1
CPC 350	ZN061	PRO	14"	1"	1/8"	3/8"	4400	1
PRO	30961	FILU	350 mm	25.4 mm	2.6 mm	10 mm	max.	1

- · Recommended disc to cut fine porcelain tiles.
- · High Tech. High speed on straight cuts on porcelain tiles.

						- F -		
	REF	\triangle	0	0	P	(RPM	
CPX 200	30964	PRO	8"	1"	1/16"	5/16"	7650	1
PRO	30704	PRU	200 mm	25.4 mm	1.6 mm	8 mm	max.	1
CPX 250	70047	nnn	10"	1"	1/16"	5/16"	6150	1
PRO	30702	PRU	250 mm	25.4 mm	1.6 mm	8 mm	max.	1
CPX 300	Z004Z	nnn	12"	1"	1/16"	5/16"	5100	1
PRO	30963	PRU	300 mm	25.4 mm	1.6 mm	8 mm	max.	1
CPX 250 PRO CPX 300	30962 30963	PRO PRO	10" 250 mm 12"	1" 25.4 mm 1"	1/16" 1.6 mm 1/16"	5/16" 8 mm 5/16"	6150 max. 5100	1

RUBI

 \odot

XX







- \cdot For the miter cut of porcelain tiles. High stability and speed of cut.
- · Sintered TURBO blade.
- · Laser welding.

	REF	\triangle	Ø	0		٥	RPM	
TPI 200	710//	SUPER	8"	1"	1/8"	5/16"	7650	1
SUPERPRO	31966	PRO	200 mm	25.4 mm	2.5 mm	8 mm	max.	1
TPI 230	31967	SUPER	9"	1"	1/8"	5/16"	6650	1
SUPERPRO	31707	PRO	230 mm	25.4 mm	2.5 mm	8 mm	max.	1
TPI 250	31969	SUPER	10"	1"	1/8"	5/16"	6150	1
SUPERPRO	31969	PRO	250 mm	25.4 mm	2.5 mm	8 mm	max.	1

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- \cdot For cutting materials > 3/4" (20 mm) thickness.
- · Only for straight cuts, not suitable for mitring.

-						_		
	REF	\triangle	Ø	0	P	٥	RPM	
TVH 200	31936	SUPER	8"	1"	1/16"	3/8"	7650	1
SUPERPRO	21720	PRO	200 mm	25.4 mm	1.6 mm	10 mm	max.	1
TVH 250	31937	SUPER	10"	1"	1/16"	3/8"	6150	1
SUPERPRO	2172/	PRO	250 mm	25.4 mm	1.6 mm	10 mm	max.	1
TVH 300	31938	SUPER	12"	1"	1/16"	3/8"	5100	1
SUPERPRO	21720	PRO	300 mm	25.4 mm	2 mm	10 mm	max.	1
TVH 350	31939	SUPER	14"	1"	1/8"	3/8"	4400	1
SUPERPRO	31737	PRO	350 mm	25.4 mm	2.4 mm	10 mm	max.	

NEW

- · Specially designed for landscaping materials.
- · Ideal for cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm.
- A great combination of high performance and cutting speed with high-quality finishes.
- \cdot With holes in the core to help cool the disc and distribute water evenly across the disc.

	REF		0	0	P	٥	RPM	
TPL 250	40913	PRN	10"	7/8"	1/16"	5/16"	6150	1
EXT PRO	40713	PKU	250 mm	22.2 mm	1.4 mm	8.5 mm	max	1
TPL 300	40914	PRO	12"	7/8"	1/16"	5/16"	5100	1
EXT PRO	40914	PKU	300 mm	22.2 mm	1.4 mm	8.5 mm	max	1

PORCELAIN TILES PREMIUM 2CM DIAMOND BLADE (SPT)



ABRASIVE MATERIALS TURBO DIAMOND BLADE (TON)





曲

(

<u></u>

XX







NEW

- · Specially designed for landscaping materials.
- · Ideal for cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm.
- · Segmented.
- · Due to the diamond rim's special alloy, these types of materials can be cut quickly and have an extra-long life.
- · Good finish.

	REF	\triangle	0	0	P	٥	RPM	
SPL 250 EXT	40910	SUPER	10"	1"	1/16"	3/8"	6150	1
SUPERPRO	40910	PRO	250 mm	25.4 mm	1.6 mm	10 mm	max.	1
SPL 300 EXT	40911	SUPER	12"	1"	1/16"	3/8"	5100	1
SUPERPRO	40911	PRO	300 mm	25.4 mm	1.6 mm	10 mm	rpm.	1

- · For cutting all types of ceramic, porcelain and natural stone materials.
- · For cutting thicknesses from 20 mm to 35 mm.
- · Joint by laser welding.
- · Extra-long life.
- · Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- · Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF	\triangle	0	0	P	٥	RPM	
SPT 250 EXT	32934	PREMIUM	10"	1"	1/16"	3/8"	6150	1
PREMIUM	32734	PREMIUM	250 mm	25.4 mm	2.2 mm	10 mm	max.	1
SPT 300 EXT	77075	DDEMILIM	12"	1"	1/8"	3/8"	5100	1
PREMIUM	32733	PREMIUM	300 mm	25.4 mm	2.4 mm	10 mm	max.	1
SPT 350 EXT	32936	PREMILIM	14"	1"	1/8"	3/8"	4400	1
PREMIUM	J2730	PKLIMIUM	350 mm	25.4 mm	2.4 mm	10 mm	max.	1

- · Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.
- · A great combination. High performance and cutting speed with high standard finishes.

	REF		Ø	0	P	٥	RPM	
TON 200	31906	SUPER	8"	1"	1/8"	5/16"	7650	1
SUPERPRO	31700	PRO	200 mm	25.4 mm	2.5 mm	7.5 mm	max.	1
TON 250	31909	SUPER	10"	1"	1/8"	5/16"	6150	1
SUPERPRO	71707	PRO	250 mm	25.4 mm	2.5 mm	7.5 mm	max.	1





 (\circ)

XX

CLASSIFICATION OF BLADES BY COLOUR



GENERAL PURPOSE

GENERAL PURPOSE

GENERAL CERAMIC MATERIAL

HARD MATERIALS

PORCELAIN

ABRASIVES

MARBLE

RESCUE

Recommended blade for cutting concrete and hard materials such as granite, slate, refractory, brick, etc. Recommended blade for general cutting of building materials such as brick, concrete, terrazzo, natural stone, etc.

Recommended blades for cutting marble, fibers and other materials with high breakage risk. Recommended blade for cutting hard materials such as granite, slate, firebrick, etc.


Recommended blades for fine cuts of porcelain tiles.

Recommended blades for cutting abrasive materials such as bricks, calcareous terrazzo, marble, sandstone, etc.

Recommended blade for cutting marble, limestone and fibres.

Recommended blade for cutting all kinds of materials such as steel sheet, wood, masonry materials, fiberglass, PVC, steel rods, concrete, reinforced concrete, etc ...

TYPES AND USES OF DIAMOND BLADES

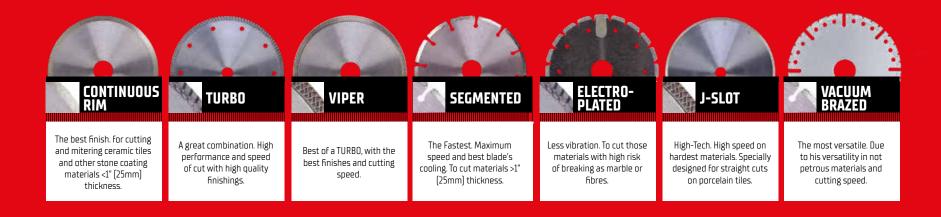







APPLICATION AND USE GUIDE

	CONTINU	JOUS RIM	J-SLOT			TURBO				VIPER			9	EGMENTE	D		ELECTRO	PLATED	VACUUM BRAZED
	CSV	CPR	CPJ	TSV	TSA	TCR	TPL	TLG	TVR	TVA	TGS	STT	SEV	SHA	SCA	SON	EMG	ECD	RSQ
Sandstone				~								~	~			✓			~
Asphalt				~								~	✓			✓			~
Wall tile	~	~	~			✓	✓	✓			~							✓	
Fired-clay tile	~			~							~		~			~		~	~
Concrete block				~								~	~			~			
Rubber																			~
Steel plate																			~
Quartzite				~	~		~	✓	~	~	~	~	~	~	✓			~	
Fibreglass											~						~	~	~
Fibre cement				~								~	~			✓			~
Granite	~			~	~		✓	~	~	~	~	~	~	~	✓				
Floor tile	~						~	~	~	✓	~							~	
Extruded stoneware	✓			~	~		~	~	~	✓	~							~	
Porcelain tile	~	✓	~			✓	~	✓	~	✓	~							✓	
Reinforced concrete												~		✓	~				
Cellular concrete				~								~	~		_	~			
Cured concrete				~	~							~	~						
Fresh concrete				~								~	~			~			
Clinker				~	~				~	✓	~	~	~	~	~			✓	
Face brick				~								~	~			✓			~
Fireproof brick				~								~	~	✓	✓				~
Wood																			~
Marble	~			~							~	~	~			✓	~	✓	
Aluminium profile																			~
Volcanic stone				~								~	~			✓			
Slate				~	~		~	~	~	~	~	~	✓	✓	✓		~	✓	
Ceramic roof tile	~			~							~		✓			✓	~	~	~
Concrete roof tiles				~								~	✓			✓			
Glazed roof tile	~			~							~						~	✓	
Calcareous terrazzo				~							~	~	~			✓	~	~	~
Siliceous terrazzo				~	~				~	✓		~	~	✓	✓				~
Concrete pipe				~								~	~			✓			~
Polyethylene (PE) pipe																			~
PVC																			~
Steel rod																			~



XX

(o)

Óptima utilizatoión
Utilización alternativa



APPLICATION AND USE GUIDE

		CONTINUOUS RIM									
		LUNTINUUUS KIN		J-SLOT		TURBO		VIPER		SEGMENTED	
	CEV	CPA	CPC	СРХ	TON	TPI	TPL	TVH	SPL	SHR	SPT
Sandstone					✓					~	
Asphalt					✓					~	
Wall tile	✓		✓	~		✓					
Fired-clay tile	✓				✓					~	
Concrete block					✓					~	
Quartzite		✓					~	✓	~	~	✓
Fibre cement					✓					✓	
Granite	✓	✓					✓	✓	✓	✓	~
Floor tile	~	✓					~	✓	~		✓
Extruded stoneware	✓	✓					~	✓	✓		~
Porcelain tile	✓	✓	✓	✓		✓	✓	✓	✓		✓
Cellular concrete					✓					✓	
Cured concrete										✓	
Fresh concrete					✓					✓	
Clinker								✓		✓	
Face brick					✓					✓	
Firebrick								✓		~	
Marble	✓				✓					~	
Glass materials		~									
Volcanic stone					✓					~	
Slate		✓					~	~	✓	~	✓
Ceramic roof tile	✓				✓					~	
Concrete roof tiles					✓					~	
Glazed roof tile	~				~						
Calcareous terrazzo					✓					~	
Siliceous terrazzo								~		~	
Concrete pipe					✓					~	

Ideal use 🗸
Utilización alternativa 🗸



##

























DRILLING

Tools for drilling ceramic tile, stoneware, marble, granite and other materials.







(o)

XX



- Tungsten Carbide bits for drilling Wall tiles.
- · Adaptable to manual drill and head for electric drill without hammer.







- · Attachable to all measures of Tungsten Carbide drill bits.
- · Sunnlied in hlister

20ppined iii bii3teii		
	REF	
HEAD WITH CENTRAL ATTACHMENT DRILL BIT	04992	1

TUNGSTEN CARBIDE DRILL BITS











· Tungsten carbide drill bits for wall tiles. Adaptable to manual drill and head for use with electric drill without hammer (ref. 04992).

	REF	\triangle	RPM	•			
DRILL BIT 1 3/8"	04962	PRO	800 max.	11/16"	Е	780	
[35 MM.]	04702	PRU	ouu iiidx.	18 mm		700	
DRILL BIT 1	04964	PRO	800 max.	11/16"	г	780	
3/4"(45 MM.)	U4904	PKU	BUU IIIAX.	18 mm	כ	780	
DRILL BIT 2 1/4"	04965	nnn	000	11/16"	г	700	
(55 MM.)	U4765	PRO	800 max.	18 mm	כ	780	


DRILL BIT SET WITH CASE





· It consists of head with central drill attachment and Tungsten Carbide drill bits of Ø 1", 1 3/8", 1 3/4", 1 3/4", 2 1/2", 2 3/4" and 3 1/4" (27, 35, 45, 55, 65, 70 and 85 mm), with plastic case.

	REF			
DRILL BIT SET WITH CASE	04995	PRO	1	216

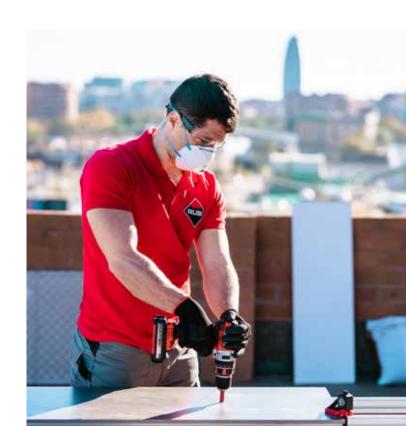



DRYGRES DRILL BITS

 \bigotimes

KIT MINI DRYGRES









#

()

Ċ

XX



- · Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- · They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- Drill 0 1/4"[6 mm], 5/16"[8 mm], 3/8"[10 mm] and 1/2"[12
- Case.

	REF	\triangle	RPM		
KIT MINI DRYGRES	ENNZO	SUPERPRO 14000 max.		1 7/16"	1
כוז אווואו ווא דעוגבט	30730	JUPERPRU.	14000 IIIdX.	36 mm	1



· Maximum operating speed 14,000 r.p.m. M14 thread finish. Usable with grinder Sunnlied in histor

Usable with grin	Usable with grinder. Supplied in blister.							
	REF	\triangle	RPM					
DRYGRES DRILL BIT Ø 1/4" (6 MM.)	05988	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT 0 2/7" (7 MM.)	05994	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 5/16" (8 MM.)	05989	SUPERPRO 1	.4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 3/8" (10 MM.)	05990	SUPERPRO 1	.4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 1/2" (12 MM.)	05991	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 3/4" (20 MM.)	04910	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 1" (25 MM.) NEW	57903	SUPERPRO	14000	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 1 1/8" (28 MM.)	04911	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 1 3/8" (35 MM.)	04912	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 1 3/4" [43 MM.]	04913	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 2" (50 MM.)	04914	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 2 3/8" (60 MM.)	04915	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 2 1/2" (65 MM.)	04916	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 2 11/16" (68 MM.)	04917	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 3" (75 MM.)	05992	SUPERPRO 1	4000 max.	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 3 1/8" (80 MM.) NEW	57904	SUPERPRO	14000	1 7/16" 36 mm	1			
DRYGRES DRILL BIT 0 3 1/4" (85 MM.) NEW	57906	SUPERPRO	14000	1 7/16" 36 mm	1			
DRYGRES DRILL BIT Ø 4" (100 MM.) NEW	57907	SUPERPRO	14000	1 7/16" 36 mm	1			
DRYGRES DRILL BIT 0 4 3/4" (120 MM.) NEW	57908	SUPERPRO	14000	1 7/16" 36 mm	1			
MULTIDRILL GUIDE (MÁX. Ø 83 MM.)	50944	PRO 1	4000 max.	1 7/16" 36 mm	1			
-								

KIT DRYGRES

tiles.





DIAMOND DRILL

· For dry drilling of Wall tiles,

Floor tiles and Porcelain

BITS - DRY CUT



- · The kit includes:
- · MULTIDRILL guide with suitcase.Ref.50917, Ref.50936, Ref.50996
- · Dry cutting diamond drill bits:
- · 01 1/8"[28mm],1 3/8"[35mm],1 3/4"[43mm]& 2 11/16"[68mm].
- · 01 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm).
- \cdot 01/4"[6mm],5/16"[8mm],3/4"[20mm],13/8"[35mm],50 &2 11/16"[68mm].

	REF	\triangle F	RPM			
KIT 4 BITS DRYGRES	50917	SUPERPRO 140	nnn mav	1 7/16"	1	
KII 4 BII 3 DKI GKL3	JU71/	JUPERPRU 140	JUU IIIax.	36 mm	1	
KIT 5 BITS DRYGRES	50936	SUPERPRO 140	100 may	1 7/16"	1	
KII J BII J BKI GKEJ	JU7JU	JUPERPRU 140	JUU IIIAX.	36 mm	1	
KIT 6 BITS DRYGRES	50996	SUPERPRO 14000 ma:		1 7/16"	,	
KII O BIIS DKYUKES	20770	SUPERPRU 140	EKPKU 14000 IIIax.		1	

KIT TCR BLADE AND DRYGRES DRILL BITS









- · Dry diamond cutting disc TCR-115.
- · Four dry cutting diamond drill bits (2x6mm, 20mm, 35mm) [2x1/4", 13/16", 1 3/8"].

	REF	\triangle	
KIT TCR BLADE AND DRYGRES DRILL BITS	68923	SUPERPRO	1

RUBI

 \odot

 \otimes







- · MULTIDRILL guide with suitcase.Ref.51931, Ref.51937, Ref.51929
- · Dry cutting diamond drill bits:
- · 01 1/8"[28mm],1 3/8"[35mm],1 3/4"[43mm]& 2 11/16"[68mm].
- · 01 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm).
- · 01/4"[6mm],5/16"[8mm],3/4"[20mm],1 3/8"[35mm],50 &2 11/16"[68mm].

	REF	\triangle	RPM	
KIT 4 DRILL BITS DRYGRES PREMIUM	51931	PREMIUM	14000	1
KIT 5 DRILL BITS DRYGRES PREMIUM	51937	PREMIUM	14000	1
KIT 6 DRILL BITS DRYGRES PREMIUM	51929	PREMIUM	14000	1

KIT MINI DRYGRES PREMIUM







- · Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- · They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- Drill 0 1/4"[6 mm], 5/16"[8 mm], 3/8"[10 mm] and 1/2"[12 mm].
- Case.

	REF	\triangle	RPM	
KIT MINI DRYGRES PREMIUM	51939	PREMIUM	14000	1



- · Designed for the fast drill of any kind of ceramic tiles including porcelain, but also suitable to drill natural stone as granite or marble, and sinthered stone.
- · Vacuum brazed type drill bits that provides a very fast dry drilling with very good quaility.
- · Resistant brazed of diamond grits and great quality materials for extra long life.
- · Integrated wax only in the smallest diameters (6 12 mm) to help cooling and lubrication during drilling.
- · Side openings for better cooling due greater air circulation in biggest diameters (20 – 85 mm).
- · Air cooled through the own rotation but also recommended to describe small orbital movements with the tool to help cooling.
- · For proper use and care of the product when drilling materials 20mm thick or more, it's always recommended to do 10mm first, clean the bit, then continue drilling through the material. This will also extend its life.

	REF	\triangle	RPM			
DRYGRES PREMIUM DRILL BITS	06900	PREMILIM	14000	1 3/16"	1	
Ø 6 MM.	00700	PKLIMIUM	14000	30 mm	1	
DRYGRES PREMIUM DRILL BITS	N6915	PREMILIM	14000	1 3/16"	1	
0 7 MM.	00913	PREMIUM	14000	30 mm	1	
DRYGRES PREMIUM DRILL BITS	N6918	PREMILIM	14000	1 3/16"	1	
0 8 MM.	00918	PKEMIUM	14000	30 mm	1	

DRYGRES PREMIUM DRILL BITS	07010	DDEMILIM	14000	1 3/16"	
0 10 MM.	06919	PREMIUM	14000	30 mm	1
DRYGRES PREMIUM DRILL BITS	06929	PREMIUM	14000	1 3/16"	1
Ø 12 MM.	00929	PREMIUM	14000	30 mm	1
DRYGRES PREMIUM DRILL BITS	06971	PREMIUM	14000	1 3/16"	1
Ø 20 MM.	007/1	PREMIUM	14000	30 mm	1
DRYGRES PREMIUM DRILL BITS	06972	PREMIUM	14000	1 3/16"	1
Ø 28 MM.	00772	PREMIUM	14000	30 mm	
DRYGRES PREMIUM DRILL BITS	06973	DDEMILIM	14000	1 3/16"	
0 35 MM.	U09/3	PREMIUM	14000	30 mm	1
DRYGRES PREMIUM DRILL BITS	06974	DDEMILIM	14000	1 1/2"	1
0 43 MM.	00974	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06975	PREMIUM	14000	1 1/2"	1
Ø 50 MM.	00973	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06976	PREMIUM	14000	1 1/2"	1
Ø 60 MM.	00970	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06977	PREMIUM	14000	1 1/2"	1
Ø 65 MM.	00977	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06978	PREMIUM	14000	1 1/2"	1
Ø 68 MM.	00978	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06979	PREMIUM	14000	1 1/2"	1
0 75 MM.	00979	PREMIUM	14000	38 mm	1
DRYGRES PREMIUM DRILL BITS	06980	PREMIUM	14000	1 1/2"	1
0 85 MM.	00780	PKEMIUM	14000	38 mm	1

RPM

XX







#

(o)

XX





- · Specially designed for dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- · With high resistant welding of the diamond grains for a longer duration.
- · "Easy-Start" Without slipping. Suitable for work without a centering guide.
- · Perfect for cordless drills (1000 2500 rpm).
- · Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill.
- · High quality finish.
- · designed to be used exclusively with either a cordless drill onr an electric drill.
- Their hexagonal connection allows them to adapt quickly to drills with a 10 mm chuck.

REF		PM		
05923	SUPERPRO 1000) min.	1 7/16" 36 mm	1
05924	SUPERPRO 1000) min.	1 7/16" 36 mm	1
05926	SUPERPRO 1000) min.	1 7/16" 36 mm	1
05927	SUPERPRO 1000) min.	1 9/16" 40 mm	1
05928	SUPERPRO 1000) min.	1 9/16" 40 mm	1
05929	SUPERPRO 1000) min.	1 9/16" 40 mm	1
05970	SUPERPRO 2000) min.	1 9/16" 40 mm	1
05971	SUPERPRO 2000) min.	1 9/16" 40 mm	1
	05923 05924 05926 05927 05928 05929	05923 SUPERPRO 1000 05924 SUPERPRO 1000 05926 SUPERPRO 1000 05927 SUPERPRO 1000 05928 SUPERPRO 1000 05929 SUPERPRO 1000 05970 SUPERPRO 2000	05923 SUPERPRO 1000 min. 05924 SUPERPRO 1000 min. 05926 SUPERPRO 1000 min. 05927 SUPERPRO 1000 min. 05928 SUPERPRO 1000 min. 05929 SUPERPRO 1000 min. 05970 SUPERPRO 2000 min.	05923 SUPERPRO 1000 min. 17/16" 36 mm 05924 SUPERPRO 1000 min. 17/16" 36 mm 05926 SUPERPRO 1000 min. 17/16" 36 mm 17/16" 36 mm 17/16" 40 mm 05928 SUPERPRO 1000 min. 19/16" 40 mm 05929 SUPERPRO 1000 min. 19/16" 40 mm 05970 SUPERPRO 2000 min. 19/16" 40 mm

- · For dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- · Hexagonal connection Compatible with battery drills.
- · Kit composed of:
- · DRYGRES 4DRILL diamond drills dry cut 0 6, 8, 10 and 12 mm.
- · With case.

	REF		
KIT DRYGRES 4DRILL	05939	SUPERPRO 1000 min.	1



XX

DIAMOND DRILL BITS - WET CUT

 For wet drilling of Wall tiles, Floor tiles, Porcelain and other materials.







- · Kit includes:
- · MULTIDRILL Guide.
- · Tank and hose.
- \cdot Diamond drill bits 0 3/4", 1 1/8", 1 3/8", 1 3/4", 2" and 2 11/16" (0 20, 28, 35, 43, 50, 68 mm).
- · Case.

1 3/16" KIT FORAGRES 50903 SUPERPRO 900 max. 30 mm		REF	\triangle	RPM		
11111 05	KIT FORAGRES	50903	SUPERPRO	900 max.	1 3/16" 30 mm	1

FORAGRES DRILL BITS Ø 13/16" TO 4 3/4" (20 - 120 MM.)



EASY GRES DRILL BITS 07/32" TO 1/2" (6-12 MM.)







- · To drill floor tiles, porcelain tiles, granite and marble.
- \cdot Always use cooled with water and non-hammer electric drill.
- \cdot 015/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.

	REF	\triangle	RPM		
FORAGRES DRILL BIT	04970	SUPERPRO	000 may	1 3/16"	1
3/4" (20 MM.)	04770	JUPLKPKU	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 1	04971	SUPERPRO	000 may	1 3/16"	1
1/8" (28 MM.)	047/1	JUPLKPKU	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 1	04972	SUPERPRO	000 may	1 3/16"	1
3/8" (35 MM.)	04772	JUPLKPKU	700 IIIdX.	30 mm	1
FORAGRES DRILL BIT 1	04963	SUPERPRO	000 may	1 3/16"	1
5/8" (40 MM.)	04703	JUPLKPKU	700 IIIdX.	30 mm	1
FORAGRES DRILL BIT 1	04981	SUPERPRO	000 may	1 3/16"	1
3/4" (43 MM.)	04701	JOI ENT NO	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 2"	04973	SUPERPRO	ONN may	1 3/16"	1
(50 MM.)	04//5	JUFLIKEIKU	/00 IIIdx.	30 mm	1
FORAGRES DRILL BIT 2	04974	SUPERPRO	000 may	1 3/16"	1
1/2" (65 MM.)	04774	JUPLKPKU	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 2	04918	SUPERPRO	000 may	1 3/16"	1
11/16" (68 MM.)	04710	JUPLKPKU	700 IIIax.	30 mm	1
FORAGRES DRILL BIT 3"	04975	SUPERPRO	000 may	1 5/16"	1
[75 MM.]	04973	JUPERPRU	700 IIIax.	33 mm	1
FORAGRES DRILL BIT 4"	04976	SUPERPRO	/50 may	1 3/16"	1
(100 MM.)	04770	JUPLKPKU	אסווו טעא.	30 mm	1
FORAGRES DRILL BIT 4	04977	SUPERPRO	/150 may	1 3/16"	1
3/4" [120 MM]	U47//	JUPERPRU	אטוווטא.	3N mm	1



- Diamond drill bits to be used with electric drill without hammer
- The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- They must always be used with the EASY GRES guide which allows their adequate refrigeration ensuring a high accuracy and good results.
- · Body made of steel and bit made of electrodeposited diamond.
- Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling.
- · Supplied in blister.

	REF	\triangle	RPM			
EASY GRES DRILL	N4922	PRO	1000	1"	10	4600
BIT 7/32" [6 MM.]	04722	PRU	max.	25 mm	10	4000
EASY GRES DRILL	04920	PRO	1000	1"	10	4600
BIT 1/4" (6.5 MM.)	04920	PKU	max.	25 mm	10	4000
EASY GRES DRILL	N4973	PRO	1000	1"	10	4600
BIT 5/16" (8 MM.)	04925	PKU	max.	25 mm	10	4000
EASY GRES DRILL	N4974	PRO	1000	1"	10	4600
BIT 3/8" (10 MM.)	U4724	PKU	max.	25 mm	10	4000
EASY GRES DRILL	N4971	PRO	1000	1"	10	4600
BIT 1/2" [12 MM.]	U4921	PKU	max.	25 mm	10	4000





#

(o)

Ů

XX





- The EASY GRES guide allows holes both vertically and horizontally, thanks to its functional design incorporating a water tank with flow control valve.
- \cdot The EASY GRES guide attaches easily to any surface, thanks to its renewable adhesives.

	REF	\triangle	RPM			
EASY GRES DRILL BIT	04927	PRO	1000	1"	10	800
7/32" (6 MM.) SET	04727	PRU	max.	25 mm	10	000
EASY GRES DRILL BIT	04928	PRN	1000	1"	10	800
5/16" (8 MM.) SET	04720	PRU	max.	25 mm	10	000
EASY GRES DRILL BIT	0,000	DDO	1000	1"	10	000
3/8" (10 MM.) SET	04929	PRO	max.	25 mm	10	800
EASY GRES DRILL BIT	0,010	DD0	1000	1"	10	000
7/32" AND 3/8" (6 AND 10 MM.) SET	04919	PRO	max.	25 mm	10	800
EASY GRES DRILL BIT 1/4"	0,000	DD0	1000	1"	10	000
AND 3/8" (6.5 AND 10 MM.) SET	04909	PRO	max.	25 mm	10	800
KIT EASY GRES BITS 0	0,00,	DDO	1000	1"	10	
6,8,10 AND 12 MM.	04904	PRU	PRO 1000		10	



- · Electroplated diamond drills for use with electric drill without hammer.
- · The quality of the diamond permits drilling stoneware, porcelain, granite, marble and glass.
- · Always use water-cooled.
- The use of the MULTIDRILL guide (Ref. 50944) and the water tank (Ref. 50947) to cool and prevent movement of the drill bit during drilling getting good finishes.
- The working speed varies between 400 and 1000 r.p.m., depending on the material to be drilled.
- · Body in steel and electroplated diamond tips.
- · Lateral opening for improved cooling and allow the removal of solid waste after each hole.
- · For a better finishing and longer bit life, it is important to respect the right speed and moderate pressure during drilling.
- · Supplied in blister.

	REF	\triangle	RPM		
EASY GRES DRILL BIT 3/4" (20 MM.)	05961	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 1/8" (28 MM.)	05962	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 3/8" (35 MM.)	05963	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 5/8" (40 MM.)	05964	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 1 3/4" [43 MM.]	05965	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2" (50 MM.)	05966	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2 1/4" (55 MM.)	05967	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2 1/2" (65 MM.)	05969	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 2 11/16" [68 MM.]	05978	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 3" (75 MM.)	05979	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 4" (100 MM.)	05981	PRO	500 max.	1 1/16" 27 mm	1
EASY GRES DRILL BIT 4 3/4" (120 MM.)	05982	PRO	500 max.	1 1/16" 27 mm	1



(O)

KIT EASY GRES PLUS











- · MULTIDRILL guide.
- · Water tank and hose.
- \cdot EASY GRES drills 0 3/4", 11/8", 13/8", 13/4", 2", 21/2" and 3" (20, 28, 35, 43, 50, 65 and 75 mm.) and case.

	REF	\triangle	RPM			
KIT EASY	50937	PRO	500 max.	1 1/16"	1	48
GRES PLUS	30737	PRU	JUU IIIdX.	27 mm	1	40

EASY GRES DRILL BIT 0 1 3/8 (35 MM.) SET





- · The kit includes:
- · MULTIDRILL guide.
- · Water tank and hose.
- EASY GRES drill bit 0 1 3/8" (35 mm).

	REF	RPM			
EASY GRES DRILL BIT 0	50921	500 max.	1 1/16"	1	720
1 3/8" (35 MM.) SET	30721	JUU IIIdX.	27 mm	1	720

TANK FOR MULTIDRILL GUIDE






- · Bottle of 1200 ml. volume, with manual pressure pump.
- · Includes 2 m. hose.

	REF	\triangle	
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	PRO	1

MULTIDRILL GUIDE







- · Compatible with all Rubi diamond drill bits, Ø 6 to 83 mm.
- · Includes hose and tank connection (Ref. 50947).

	REF	\triangle	
MULTIDRILL GUIDE	50944	PRO	1

MULTIDRILL PLUS RM GUIDE





- · By fixing the guide with the suction cup, allows horizontal and vertical holes in the correct place, preventing the drill bit from slipping on any type of surface: smooth, rough or slightly structured.
- · Compatible with all Rubi diamond drill bits, 0 6 to 120 mm.
- · Metal centering guide for greater wear resistance.
- · Includes hose and tank connection (Ref. 50947).

	REF	\triangle	
MULTIDRILL PLUS GUIDE RM (MAX. Ø 120 MM)	51908	PRO	1

ELECTRIC DRILL ADAPTER





- · For the use of dry cutting diamond drill bit with electric drill. (M14)
- · Use without hammer.

	REF	\triangle		
M14 ADAPTER FOR ELECTRIC DRILL	05976	SUPERPRO	1	



XX





o



DRILL BIT CHARACTERISTICS

		MATERIALS	0 MM	Ø INCH	REF	RPM	1 MM	↑ III INCH	USE
			20 mm	3/4"	04970				
			28 mm	1 1/8"	04971				
			35 mm	1 3/8"	04972		30 mm	0 mm 1 ^{3/16} "	
		Tile	40 mm	1 5/8"	04963	máx. 900			ELECTRIC DRILL Without percussion
	S	Ceramic tiles	43 mm	1 3/4"	04981				
	FORAGRES	Porcelain tiles	50 mm	2"	04973				_
	8	Granite	65 mm	2 1/2"	04974				USE with Multidrill drilling guide/ MULTIDRILL PLUS RM. + Water
		Marble	68 mm	2 11/16"	04918				tank and hose (Ref. 50944/51908 + 50947)
			75 mm	3"	04975		33 mm	1 5/16"	
			100 mm	4"	04976	máx.	30 mm	1 3/16"	
2			120 mm	4 3/4" 04977 450 SU mm	1				
BITS			6 mm	14/64"	04927				
DRILL			6,5 mm	1/4"	04925	Between 400 &		n 1"	ELECTRIC DRILL Without percussion
8			8 mm	5/16"	04928	1.000	25 mm		_
			10 mm	13/32"	04929	400- 1000			USE with Multidrill drilling guide + Water tank and hose (Ref. 50944 + 50947)
DIAMOND			12 mm	1/2"	04926				
A		Tile	20 mm	3/4"	05961				
		Ceramic tiles	28 mm	1 1/8"	05962				
	ES		35 mm	1 3/8"	05963			n 1 ^{1/16} "	
	EASYGRES		40 mm	1 5/8"	05964				ELECTRIC DRILL Without percussion
	2		43 mm	1 3/4"	05965				
		Marble	50 mm	2"	05966	máx.	27 mm		- e
		Glass	55 mm	2 1/4"	05967	500	2,		USE with Multidrill drilling guide/ MULTIDRILL PLUS RM. + Water
			65 mm	2 1/2"	05969				tank and hose (Ref. 50944/51908 + 50947)
			68 mm	2 11/16"	05978				30747]
			75 mm	3"	05979				
			100 mm	4"	05981				
·			120 mm	4 3/4"	05982				





DRILL BIT CHARACTERISTICS

		MATERIALS	0 MM	Ø INCH	REF	RPM	1 mm	‡ INCH	USE
	DRYGRES PREMIUM	Tile Ceramic tiles Porcelain tiles	6 mm 7 mm 8 mm 10 mm 12 mm 20 mm 28 mm 35 mm	14/64" 1/4" 5/16" 13/32" 1/2" 3/4" 1 1/8" 1 3/8"	06900 06915 06918 06919 06929 06971 06972 06973	máx.	30 mm	1 3/16"	GRINDER ELECTRIC DRILL Without percussion
19	DRYGRES	Granite Marble	43 mm 50 mm 60 mm 65 mm 68 mm 75 mm 85 mm	1 3/4" 2" 2 3/18" 2 1/2" 2 11/18" 3" 2 3/8"	06974 06975 06976 06977 06978 06979 06980	14.000	38 mm	1 1/2"	MULTIDRILL GUIDE / MULTIDRILL PLUS RM
DIAMOND DRILL BITS	DRYGRES	Tile Ceramic tiles Porcelain tiles Granite Marble	6 mm 7 mm 8 mm 10 mm 12 mm 25 mm 25 mm 28 mm 35 mm 43 mm 60 mm 65 mm 68 mm 75 mm 80 mm 85 mm	14/64" 1/4" 5/16" 13/32" 1/2" 3/4" 1 1/8" 1 3/8" 2 3/18" 2 11/18" 3 1/8" 3 1/8" 4 1 3/4"	05988 05988 05994 05990 05990 05991 04910 57903 04911 04912 04913 04914 04915 04916 04917 05992 57904 57906 57907	máx. 14.000	36 mm	1 7/16"	GRINDER ELECTRIC DRILL Without percussion MULTIDRILL GUIDE / MULTIDRILL PLUS RM
	DRYGRES 4DRILL	Coating ceramics Ceramic tiles Porcelain tiles	120 mm 6 mm 8 mm 10 mm 12 mm 14 mm	4 3/4" 14/64" 5/16" 13/32" 1/2" 9/16"	57908 05923 05924 05926 05927 05928	min. 1.000	36 mm	1 7/16"	ELECTRIC DRILL Without percussion Cordless POWER DRILL
	DRYGRE	Natural Stone Piedra Artificial	20 mm 28 mm 35 mm	3/4" 1 1/8" 1 3/8"	05929 05970 05971		40 mm	1 9/16"	MULTIDRILL GUIDE / MULTIDRILL PLUS RM
TUNGSTEN	DRILL BITS	Tile	27 mm 35 mm 45 mm 55 mm 65 mm 70 mm 85 mm	1" 1 3/8" 1 3/4" 2 1/4" 2 1/2" 2 3/4" 3 1/4"	04960 04962 04964 04965 04966 04967 04968	máx. 800	18 mm	11/16"	ELECTRIC DRILL Without percussion Without percussion and adapter (Ref. 04992)





























GRINDING & POLISHING

Grinding wheels and blades Blades and polishing pads







GRINDING WHEELS



##

(o)



CONCRETE DOBLE ROW GRINDING CUP





- · Grinding cup with double row of sintered segments for grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- · Maximum perimeter speed: 15.300 RPM (Ref. 05917) and 12.250 RPM (Ref. 05918).

	REF	\triangle	Ø	Ø		W	RPM	
GRINDING CUP WHEEL CONCRETE	05917	SUPERPRO	4"	7/8"	1/4"	3/4"	15300	1
DOUBLE ROW 0100			IUU mm	22.2 mm	6 mm	19 mm	max	
GRINDING CUP WHEFI CONCRETE	05918	SUPERPRO	5"	7/8"	1/4"	3/4"	12250	1
DOUBLE ROW 0125	01710	JUPLKPKU	125 mm	22.2 mm	6 mm	19 mm	max	1

CONCRETE FAN GRINDING CUP



- · Fan shaped grinding cup with sintered segments for fast grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- · Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920)

	REF	\triangle	\otimes	\otimes			RPM	
GRINDING CUP WHEEL CONCRETE	N5919	SUPERPRO	4"	7/8"	3/16"	15/16"	15300	1
FAN CUP 0100	03717	JUPERPRO	100 mm	22.2 mm	5 mm	23.5 mm	max	1
GRINDING CUP WHEEL CONCRETE	กรจวก	SUPERPRO	5"	7/8"	3/16"	15/16"	12250	1
FAN CUP 0125	03920	JUPERPRU	125 mm	22.2 mm	5 mm	23.5 mm	max	



STONE GRINDING CUP





- Turbo sintered grinding cup for grinding and edge finishing on natural stone surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- \cdot Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920).

	REF	\triangle	Ø	\varnothing			RPM	
GRINDING CUP WHEEL TURBO STONE 0100	05921	SUPERPRO	4"	0"	1/4"	3/4"	15300	1
TURBO STONE Ø100	03721	JUPLKPKU	100 mm	M14 mm	7 mm	19.5 mm	max	1


EPOXY-FIBRE GRINDING CUP





- PCD grinding cup for fast removal of epoxy, paint, acrylics or other elastic coatings.
- · High frequency welding. Heavy-Duty steel core. Medium grinding finish.
- · For GRINDING use.
- · Maximum perimeter speed: 12.250 RPM

	REF	\triangle	Ø	0			RPM	
GRINDING CUP WHEEL EPOXY, FIBRE, PCD 0125	05922	SUPERPRO	5" 125 mm	7/8" 22.2 mm	1/16" 2 mm	7/16" 10.5 mm	12250 max	1

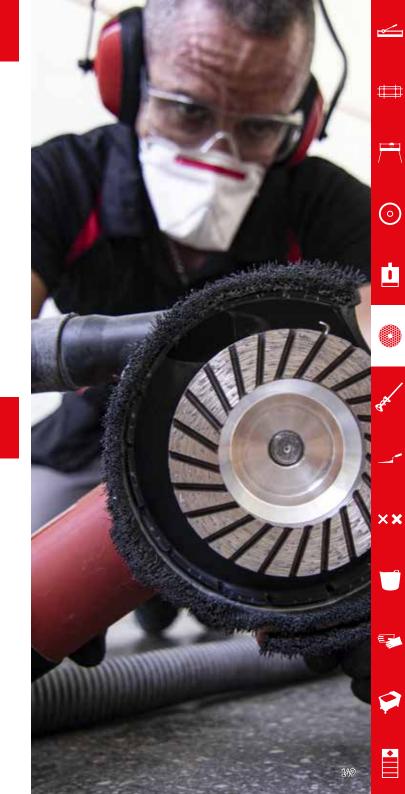







##

(o)



CUTTING & GRINDING BLADES





- · For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- · For adjustment cuts and grinding on all types of porcelain and hard
- · For materials with <25 mm thickness.
- · Electroplated continous rim blade.
- · Two-sided and reversible blade for a better performance.
- · For grinders use. Connection: M14 thread.

	REF	\triangle	\varnothing	Ø	P	٥		RPM	
ECD 115 2IN1 SUPERPRO	31964	SUPERPRO	4 1/2" 115 mm	0" M14 mm	1/16" 1.8 mm	1/4" 5.6 mm	1" 25 mm	13300 max	1
ECD 125 2IN1 SUPERPRO	31965	SUPERPRO	5" 125 mm	0" M14 mm	1/16" 1.8 mm	1/4" 5.6 mm	1" 25 mm	12250 max	1

CUTTING & GRINDING BLADES (TGS)



NEW

- · Disc for dry cutting and grinding.
- · For use with porcelain materials and natural stone.
- · A great combination. High performance and cutting speed with highquality finishes.
- · Suitable for use with a grinder.

	REF	\triangle	\varnothing	\otimes		٥	RPM	
TGS 115 SUPERPRO	40917	SUPERPRO	4 1/2"	7/8"	1/16"	1"	13300	
SUPERPRO	4071/	JUPERPRO	115 mm	22.2 mm	1.6 mm	25 mm	max.	
TGS 125	40918	SUPERPRO	5"	7/8"	1/16"	1"	12250	
SUPERPRO	40918	SUPERPRU	125 mm	22.2 mm	1.6 mm	25 mm	max.	



DIAMOND FLAP DISCS









##
























DIAMOND FLAP DISCS

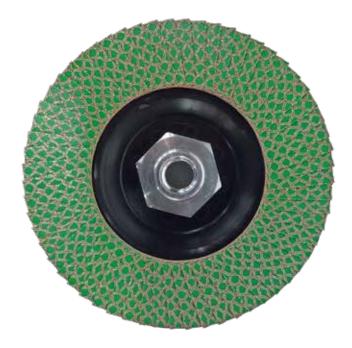

NEW

- · For grinding ceramic, porcelain, sintered stone and natural stone.
- · Fast grinding with a long life due to the ratio of diamond concentration to diamond grit spacing.
- · Excellent for mitres and bevels.
- · Ideal for edge and surface grinding.
- · It comes with an aluminium M14 ADAPTER for use with the grinder to reduce vibrations and provide better stability during work.
- · Electroplated.
- · Dry and wet grinding.
- · Very good finish.

	REF	\triangle	Ø	RPM		
DIAMOND FLAP DISC 50/60 COARSE GRIT 0115	32921	SUPERPRO	4 1/2" 115 mm	10500	0.93 Lb 0.42 kg	1
DIAMOND FLAP DISC 100/120 MEDIUM GRIT Ø115	32927	SUPERPRO	4 1/2" 115 mm	10500	0.93 Lb 0.42 kg	1
DIAMOND FLAP DISC 200 FINE GRIT 0115	32931	SUPERPRO	4 1/2" 115 mm	10500	0.93 Lb 0.42 kg	1
DIAMOND FLAP DISC 50/60 COARSE GRIT 0125	32937	SUPERPRO	5" 125 mm	9650	0.93 Lb 0.42 kg	1
DIAMOND FLAP DISC 100/120 MEDIUM GRIT 0125	32938	SUPERPRO	5" 125 mm	9650	0.93 Lb 0.42 kg	1
DIAMOND FLAP DISC 200 FINE GRIT 0125	32939	SUPERPRO	5" 125 mm	9650	0.93 Lb 0.42 kg	1





GRINDING & POLISHING



##













- · VACUUM BRAZED embossed plate.
- · For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- · For GRINDERS use.
- · Maximum recommended speed: 15,300 RPM.
- · Fine grinding finish (Ref.31974).
- · Coarse grinding finish (Ref.31979).

	REF	\triangle	0	Ø	P		RPM	
VDF 100 FINE	31974	PRO	4"	7/8"	1/16"	7/8"	15300	1
PRO	31774	PRU	100 mm	22.2 mm	2.1 mm	23 mm	max	1
VDG 100 COARSE	31979	PRO	4"	7/8"	1/8"	7/8"	15300	1
PRO	117/7	-RU	100 mm	22.2 mm	2.4 mm	23 mm	max	



BEVELING WHEELS

FINE GRAIN PRO-EDGER BEVELING WHEEL



FINE GRAIN PRO-EDGER MITRING WHEEL



曲

(o)

<u>t</u>



- · Grinding wheel for bevelling.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- · Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF		\otimes	\otimes		RPM	
R.5 FINE GRAIN PRO-FDGER	16957	SUPER	2 5/8"	0"	1/4"	12000	1
BEVELING WHEEL	10937	PRO	66 mm	M16 mm	6 mm	max.	
R.10 FINE GRAIN PRO-EDGER	16958	SUPER	3"	0"	7/16"	12000	1
BEVELING WHEEL	10730	PRO	76 mm	M16 mm	11 mm	max.	1



- · Grinding wheel for mitring.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- · Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- \cdot 45° type tool with 1–2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- For exclusive use with PRO-EDGER.

	REF		\varnothing	0		RPM	
45X20 FINE GRAIN PRO-FOGER	16946	SUPER	3 11/16"	0"	13/16"	12000	1
MITRING WHEEL	10740	PRO	94 mm	M16 mm	20 mm	max.	1
45X15 FINE GRAIN PRO-FOGER	16985	SUPER	3 5/16"	0"	9/16"	12000	1
MITRING WHEEL	10703	PRO	RO 84 mm M16 mm 15 mm n		max.	1	







- · Grinding wheel for mitring.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- \cdot The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-FDGFR.

101 2/10/03/10			0 200				
	REF	\triangle	\varnothing	0		RPM	
45X15 TURBO TWIST COARSE GRAIN PRO-	16984	SUPER	3 5/16"	0"	9/16"	12000	1
EDGER MITRING WHEEL	10704	PRO	84 mm	M16 mm	15 mm	max.	1








































- · Range of floppy discs 0100 mm for polishing, dry, of concrete, marble, granite and other ornamental natural stones.
- · It allows removing scratches and surface damage quickly and easily.
- · Maximum operating speed: 3,000 rpm.
- · Different granulometry.
- \cdot # 50, # 100 and # 200 for roughing.
- # 400, # 800, # 1500 and # 3000 polishing and close the pore.
- · VELCRO® fastening blade to holder ref. 62986.

	REF	\triangle	\varnothing	
DIAMOND PADS DRY POLISHING Ø100 MM - GRAIN # 50	62970	SUPERPRO 1	4" 00 mm	1
DIAMOND PADS DRY POLISHING Ø100 MM - GRAIN #100	62971	SUPERPRO 1	4" 00 mm	1
DIAMOND PADS DRY POLISHING Ø100 MM - GRAIN #200	62972	SUPERPRO 1	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #400	62973	SUPERPRO 1	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #800	62974	SUPERPRO 1	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #1500	62975	SUPERPRO 1	4" 00 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #3000	62976	SUPERPRO 1	4" 00 mm	1




PAD SUPPORT FOR POLISHING AND BUFFING







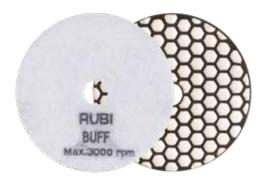

- · 0100 mm floppy disc for the final buffing, dry, of concrete, marble, granite and other ornamental natural stones.
- · Get a natural and long-lasting shine
- · Maximum operating speed: 3,000 rpm.
- · VELCRO® fastening blade to holder ref. 62986.

0				
	REF	\triangle	\odot	
DRY DIAMOND POLISHING PAD 0100 MM BUFF BL.	62977	SUPERPRO	100	1



- · Fixing brackets for flexible polishing and buffing blades 0100 mm.
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- · Connection polisher / grinder with M14 thread.

	REF	\triangle \varnothing	
SUPPORT FLOPPY PAD Ø100MM M14	62986	SUPERPRO 4"	1

MANUAL POLISHING PADS

MANUAL POLISHING PADS







- · Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- · Semi-flexible. Good adaptation to the user's hand.
- · Wet use is recommended.
- · Different grain sizes:
- \cdot # 60, # 120 and # 200 for roughing.
- \cdot # 400 for polishing.
- · Dimensions of the diamond plate: 55x90 mm.
- · Rubber pad dimensions: 58x94x30 mm.

	REF	\triangle	
DIAMOND POLISHING PAD GRAIN # 60	61974	SUPERPRO	10
DIAMOND POLISHING PAD GRAIN #120	61975	SUPERPRO	10
DIAMOND POLISHING PAD GRAIN #200	61976	SUPERPRO	10
DIAMOND POLISHING PAD GRAIN #400	61977	SUPERPRO	10





























MIXING

Electric mixers Mixing paddles








RUBIMIX E-10 ENERGY CAS

For cementitious adhesives, resins, paints and other materials.







- 2 Powered by a CAS Li-lon 18V 5.5Ah battery pack, compatible with Metabo cordless tools and all of those that form part of the CAS platform.
- 3 Light and strong. Maximum reliability.
- 4 Dual bi-material grip handle. Better ergonomics, comfort and stability.
- · Equipped with a 2-speed gearbox.
- · Progressive switch (RPM control) to optimise the mixing of each
- · Switch safety lock prevents unintentional start-up.
- · LED battery-charge indicator.
- \cdot Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- · Double-insulated motor.
- · Ref. 26965 Includes: Mixer, Battery Charger, one battery and a 120- Fl mixer paddle.

	Accessories:
4	Mixer Paddles FAST-IN 3HELIX
	RUBIMIX buckets





5.0 Ah · 18 V













	REF	\triangle		5	RPM	Å		
RUBIMIX E-10 ENERGY CAS EU	26570	PREMIUM	\checkmark	18V	1ª 0-420/ 2ª 0-700	18.9596 Lb 8.6 kg kg	1	20
RUBIMIX E-10 ENERGY CAS UK	26571	PREMIUM	V	18V	1ª 0-420/ 2ª 0-700	18.9596 Lb 8.6 kg kg	1	20
RUBIMIX E-10 ENERGY CAS NO BAT/CHARG.	27913	PREMIUM	V	18V	1ª 0-420/ 2ª 0-700	18.9596 Lb 8.6 kg kg	1	20
BATTERY RUBIMIX E-10 CAS 18V 5AH	85902	PREMIUM		18V	1ª 0-420/ 2ª 0-700		1	





曲























RUBIMIX-9 POWER MAX

Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.





- High power 2100W.
- 2 Electronic speed controller (rpm regulation) to optimize the mixing of each material.
- 3 Equipped with 2 speeds gearbox (490/880 rpm).
- 4 Mixing paddles connection through exclusive RUBI FAST-IN head for fast paddle change.
- · Greater electrical safety thanks to double isolation.
- · Easy and intiutive use.
- · Attractive and functional design.
- · Ergonomic bi-material handle with improved grip that provides greater. Comfort & stability.
- · Chassis in technical plastic, light & resistant.
- · Maximum reliability & durability.
- · Anti-ignition security system. Prevents inadvertent start-up.
- · Soft start system.
- · 0140mm triple helix mixing paddle included (M14 thread continuous full rod) for mortar and cementitious adhesives.
- · Direct access to engine sbrushes for a fast and easy maintenance. Spare brushes and 19 & 22 mm keys included.
- · Available version with carrying case (ref.26981).
- · Compatible with drill holder and RUBI mixing paddles range.

	Accessories:
4	Mixer Paddles FAST-IN 3HELIX
T	RUBIMIX buckets











	REF	\triangle		W	5			
RUBIMIX-9 POWER MAX	26980	PREMIUM		2100 W	230V/50-60Hz	16.5 Lb 7.5 kg	2	12
RUBIMIX-9 POWER MAX + CASE	26981	PREMIUM	√	2100 W	230V/50-60Hz	25.6 Lb 11.6 kg	2	12





##























RUBIMIX-9 SUPERTORQUE

Prepare

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.













	REF		W	5	RPM			
RUBIMIX-9 SUPERTORQUE	26970	SUPERPRO	1800 W	230V-50/60Hz.	1ª 0-450 / 2ª 0-780	11.2 Lb	2	18
						5.1 kg 11.2 Lb		
RUBIMIX-9 SUPERTORQUE UK	26971	SUPERPRO	1800 W	110V-50/60Hz.	1ª 0-450 / 2ª 0-780	5.1 kg	2	18
RUBIMIX-9 SUPERTOROUE UK	26972	SUPERPRO	1800 W	220V-50/60Hz.	1ª 0-450 / 2ª 0-780	11.2 Lb	2	18
						5.1 kg 11.2 Lb		
RUBIMIX-9 SUPERTORQUE USA + CHUCK	26973	SUPERPRO	1800 W	120V-50/60Hz.	1ª 0-450 / 2ª 0-780	5.1 kg	2	18
RUBIMIX-9 SUPERTOROUE + CASE	26974	SUPERPRO	√ 18NN W	23NV-5N/6NHz	1ª 0-450 / 2ª 0-780	19.51 Lb	7	18
			, 1000 11	2301 30,00112.		8.85 kg		
RUBIMIX-9 SUPERTORQUE + CHUCK	26975	SUPERPRO	1800 W	230V-50/60Hz.	1ª 0-450 / 2ª 0-780	11.2 Lb 5.1 kg	2	18

- Electric mixer with high torque.
- 2 Electronic speed controller (rpm control) to OPTIMISE the mixing of each material.
- 3 Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- 4 Better electrical SAFETY thanks to its double insulation.
- · ATTRACTIVE and FUNCTIONAL Design.
- · Connection to mixing paddles with M14 thread.
- Double handle with bi-material grip providing better ERGONOMICS, COMFORT and STABILITY.
- Chassis in TECHNICAL, LIGHT, and STRONG plastic. Maximum RELIABILITY AND DURABILITY.
- · SAFETY on button. Prevents unintentional start-up.
- \cdot Smooth start system.
- Direct access to the motor's brush housing for quick and easy maintenance.
- Includes mixing paddle with 3 helixes of 140 mm diameter for mortars and cementitious adhesives.
- Option to couple a RUBI FAST-IN adapter for paddles (NOT included).
- · Includes brushes and 19 and 22 mm spanners.
- · Version available with transport case (ref. 26974).
- · Compatible with chucks and range of mixing paddles RUBI.

	Accessories:
8	Ref. Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX
Ø	Ref. Mortar mixer paddle Thread M14 3 HELIX
	RUBIMIX buckets



























RUBIMIX-9 N

RUBI

##

(o)

XX

Versatility by changing the mixing paddle. For cementitious adhesives, resins, paints and other materials.





2 2 speed gearbox and Electronic speed controller (R.P.M. regulation) to optimize the mixing of each material.

Higher mixing performance, thanks to a more

- Quick and easy to change the brushes. High comfort.
- Safety lock to prevent unexpected start.
- · Power: 1200 W.
- · Double insulation.
- · Direct connection M14 thread.

efficient torque.

- · Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). 0 maximum paddle: 140 mm.
- \cdot 0 4 3/4" (120 mm) mixing paddle included.

	Accessories
&	Ref. Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX
4	Ref. Plaster mixer paddle Thread M-14
ð	Ref. Mortar mixer paddle Thread M14 3 HELIX
	Ref. RUBIMIX buckets











	REF		> w	5	RPM			
RUBIMIX-9 N	25940	SUPE	RPRO 1200 W	210-240V 50-60 H	z. 1ª 0-650 / 2ª 0-850	12.1 Lb 5.5 kg	2	24
RUBIMIX-9 N UK	25942	SUPE	RPRO 1200 W	110-130V 50-60 H	z. 1ª 0-650 / 2ª 0-850	12.1 Lb 5.5 kg	2	24
RUBIMIX-9 N UK	25944	SUPE	RPRO 1200 W	210-240V 50-60 H	z. 1ª 0-650 / 2ª 0-850	12.1 Lb 5.5 kg	2	24
RUBIMIX-9 N + CHUCK	24986	SUP	RPRO 1200 W	210-240V 50-60 H	z. 1ª 0-650 / 2ª 0-850	12.3 Lb 5.6 kg	2	24
RUBIMIX-9 N USA + CHUCK	24949	SUP	RPRO 1200 W	/ 110-130V 50-60 H	z. 1ª 0-650 / 2ª 0-850	12.3 Lb 5.6 kg	2	24
RUBIMIX-9 N + CASE	24958	√ SUPE	RPRO 1200 W	210-240V 50-60 H	z. 1ª 0-650 / 2ª 0-850	17.2 Lb 7.8 kg	2	18



RUBIMIX-9 DUPLEX

11

Maximum performance with less effort.





- Bimaterial double grip handle. Improved ergonomics and comfort.
- Electronic speed controller to optimize mixing (RPM).
- 3 Double mixing paddle to increase work performance.
- 4 Made of lightweight and durable materials for maximum reliability.
- · Power: 1350 W.
- · Double insulation.
- $\cdot\,1\,\text{Speed}$ and electronic regulator: 0–480 r.p.m.
- · 0 maximum paddle: 120 mm. x 2.
- · Mixers paddles of 0 4 3/4" included (120 mm).

	Accessories
*	Ref. Mortar mixer paddle DUPLEX (RUBIMIX–9 DUPLEX)
T	Ref. RUBIMIX buckets









	REF	\triangle	W	5	RPM			
RUBIMIX-9 DUPLEX 230V 50/60HZ	25943	SUPERPRO	1350 W	210-240V 50-60 Hz.	0-480	15 Lb 6.8 kg	1	12
M-120 DUPLEX	25946	SUPERPRO					2	72

































(o)

RUBIMIX-16 ERGOMAX

Innovative and ergonomic For cementitious adhesives, resins, paints and other materials.





- Handle adjustable in height. Ergonomics adaptable to each user.
- 2 Powerful 1600W motor for greater mixing capacity and high reliability.
- 3 New and improved handle. Comfort and stability.
- 4 Quick Connect System FAST-IN. Change rod without tools.
- · Electric mixer mortar powerful 1600 W.
- · Double insulation.
- \cdot Gearbox with 2 speeds (1st 0-430 rpm / 2nd 0-570 rpm).
- Electronic speed controller (R.P.M. regulation).
- · 0 maximum of mixer 160 mm.
- · Mixer paddle Ø 140 mm. FAST-IN (5 9/16 ") included.
- · Thread Direct link for mixers with M14 finish.
- · Weight: 4.6 kg.
- · Electrical cable: 3 m.

Accessories: Mixer Paddles FAST-IN 3HELIX RUBIMIX buckets



1600 W













	REF	\triangle		W	5			
RUBIMIX-16 ERGOMAX 230V 50/60HZ	24994	SUPERPRO	-	1600 W	230V 50-60Hz.	10.1 Lb 4.6 kg	2	24
RUBIMIX-16 ERGOMAX 110V 50/60HZ UK	24995	SUPERPRO	-	1600 W	110V 50-60Hz.	10.1 Lb 4.6 kg	2	18
RUBIMIX-16 ERGOMAX 230V 50/60HZ UK	24996	SUPERPRO	-	1600 W	230V 50-60Hz.	10.1 Lb 4.6 kg	2	18
RUBIMIX-16 ERGOMAX 230V 50/60HZ W/CASE	24998	SUPERPRO	V	1600 W	230V 50-60Hz.	10.1 Lb 4.6 kg	2	24





XX

ADAPTER FAST-IN THREAD





FHST in

MIXING PADDLES FAST-IN

- · Adapter for use of the FAST-IN mixer paddles.
- · Transforms threaded connection M14x2 to quick connection system FAST-IN.
- · Adaptable to any mixer with M14x2 thread.

	REF	\triangle	
FAST-IN ADAPTER	76907	SUPERPRO	1

MIXER PADDLES FAST-IN 3HELIX








- · To mix cement mortars.
- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN.
- · Compatible with RUBIMIX E-10 ENERGY CAS, RUBIMIX-9 POWER MAX, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF	\triangle	******	¥[Į.		
MIXER PADDLE M-100-	76941	SUPERPRO	33-44 Lb	21 5/8"	4"	4	
FI 3H	70741	JUPERPRU	15-20 kg	550 mm	100 mm	0	
MIXER PADDLE M-120-	76942	SUPERPRO	33-55 Lb	24"	4 3/4"	ז	
FI 3H	70742	JUPERPRU	15-25 kg	600 mm	120 mm	2	
MIXER PADDLE M-140-	76943	SUPERPRO	55-88 Lb	24"	5 1/2"	٦.	0.4
FI 3H	/0743	JUPEKPKU	25-40 kg	600 mm	140 mm	2	84

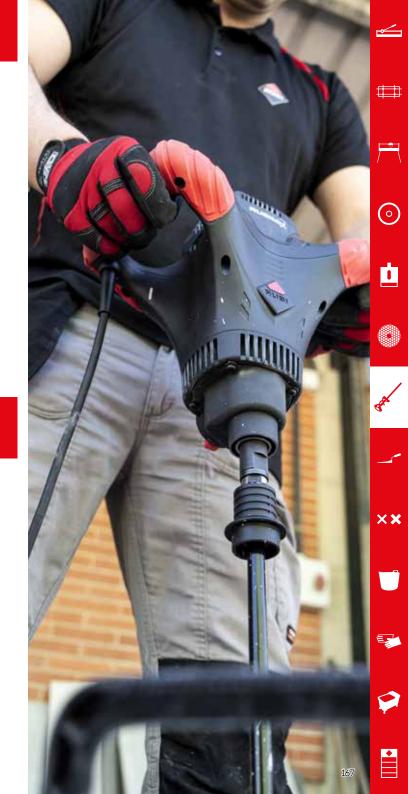



MIXING PADDLES

· Adaptable to RUBI mixers and other brands.



MORTAR MIXER M14 THREAD 3 ZN-ZINC PLATED HELIX



PLASTER MIXER PADDLE THREAD M-14





- · For mixing between 33.1 66.1 Lb. (15 25 kg.) of plaster.
- · M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX range and other brands.

	REF	\triangle	******	Į.	Ē		
PLASTER MIXER	72954	nno	33-66 Lb	24"	4 5/16"	2	
PADDLE P-120-R	72904	PRO	15-30 kg	600 mm	110 mm		

· For mixing cement-based mortars.

- · Mixing paddle with zinc treatment.
- Paddle head with 3 blades for more efficient mixing. 15% performance improvement compared to heads with two blades
- Reduces the effort for the electric mixer during the mixing process.
- · Generates less vibration. Increased comfort.
- · Connection by M14 x 2 thread.
- \cdot Can be adapted directly to RUBIMIX range and other brands.

	REF	\triangle	*******	1	Ē	
MORTAR MIXER PADDLE M-120-R	76971	PRO	33-55 Lb	24"	4 3/4"	,
3H ZN	/09/1	PKU	15-25 kg	600 mm	120 mm	0
MORTAR MIXER PADDLE M-120-R 3H	76972	PRO	55-88 Lb	29 15/16"	4 3/4"	,
LONG ZN	10912	PKU	25-40 kg	760 mm	120 mm	0
MORTAR MIXER PADDLE M-140-R	76973	PRO	66-132 Lb	24"	5 1/2"	7
3H ZN	/09/3	PKU	30-60 kg	600 mm	140 mm	2

MORTAR MIXER 3 HELIX





- · To mix cement mortars.
- · Helix head with 3 blades for higher efficient mixing.
- · Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF		*****	E.	Ē		
MORTAR MIXER	76945	PRO	22-33 Lb	16"	3"	4	360
M-80 3H	70743	PRU	10-15 kg	400 mm	80 mm	0	300
MORTAR MIXER	76946	PRO	33-44 Lb	21 5/8"	4"	4	
M-100 3H	70740	PRU	15-20 kg	550 mm	100 mm	0	



























##

(o)





- · Special mixing between 2.2 4.4 Lb. (1 2 kg) of epoxy
- · 8 mm hexagonal finish.
- · Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF	\triangle	******	Į.	Ĕ	
EPOXY MIXER	65939	PRO	2-11 Lb	16"	3"	
PADDLE E-80	92525	PKU	1-5 kg	400 mm	80 mm	0



- · To mix liquid and low density materials.
- · Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF	\triangle	*****	Į.	Ĕ		
LIQUID MIXER	65933	PRO	11-33 Lb	16"	3"	,	4/7
PADDLE L-80	ככלכס	PKU	5-15 kg	400 mm	80 mm	0	462
LIQUID MIXER	65934	PRO	33-55 Lb	21 5/8"	4"	,	
PADDLE L-100	00754	PKU	15-25 kg	550 mm	100 mm	0	

- \cdot To mix cement mortars.
- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX range and other brands.


	REF	\triangle	******	<u> </u>	Ē		
MORTAR MIXER	76917	PRO	33-44 Lb	21 5/8"	4"	,	
PADDLE M-100-R 3H	/091/	PKU	15-20 kg	550 mm	100 mm	6	
MORTAR MIXER	76918	PRO	33-55 Lb	24"	4 3/4"	7	
PADDLE M-120-R 3H	/0918	PRU	15-25 kg	600 mm	120 mm	2	
MORTAR MIXER	76919	PRO	55-88 Lb	24"	5 1/2"	ר	
PADDLE M-140-R 3H	70717	PRU	25-40 kg	600 mm	140 mm	2	
MORTAR MIXER	76940	PRO	66-132 Lb	24"	6"	٦	
PADDLE M-160-R 3H	70740	PKU	30-60 kg	600 mm	160 mm	2	





- \cdot To mix up to 66.1 110.2 Lb. (30 50 kg) of glue mortar. M27 x 1,5 thread finish.
- · Fits directly to RUBIMIX-9 DUPLEX.

	REF	\triangle	*******	Į.	Ĕ		
M-120 DUPLEX	25946	SUPER	66-110 Lb	22 7/16"	4 3/4"	1	77
PADDLE (2 UN.)	23740	PRO	30-50 kg	570 mm	120 mm	1	12

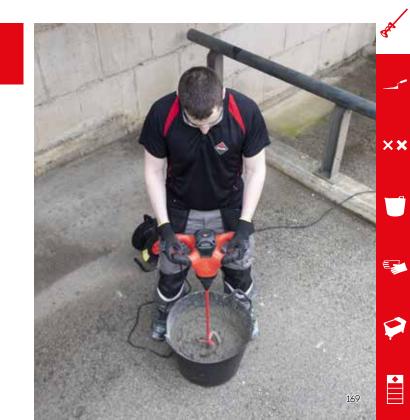




- · Rubber Bucket 65 I. Spare RUBIMIX–50–N and also for use with RUBIMIX–9/9 PLUS and 9 DUPLEX.
- Rubber Bucket 40 I. Spare RUBIMIX-25-N and also for use with RUBIMIX-9/9 PLUS and 9 DUPLEX.

	REF	\triangle	
BUCKET FOR RUBIMIX-50-N	60202	PRO	1
BUCKET FOR RUBIMIX-25-N	60265	PRO	1



- · Chuck attachable to the entire RUBIMIX range to work with hexagonal and round finishing rods below 12mm.
- · Includes chuck key S2 Ref. 71969.

	REF	\triangle		
СНИСК	71967	SUPERPRO	1	
CHUCK KEY	71969	SUPERPRO	10	3600

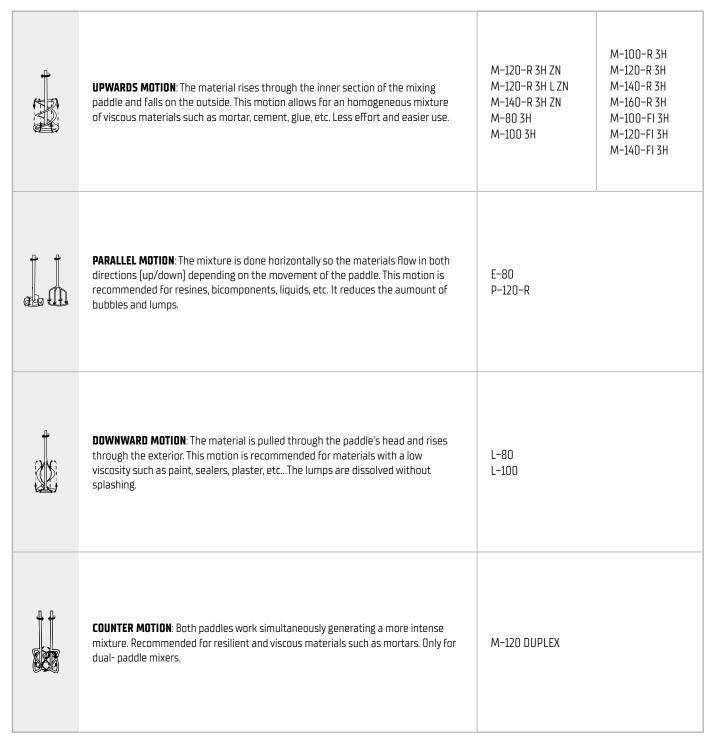

(O)

XX

MIXER TABLE

		REF	КС КС	LB	RPM	W W	MM MW	INCH	MM	INCH		MM/INCH		
M-120-R 3H ZN		76971	15 - 25 kg	33.1 - 55.1 Lb	300 - 500	950	600	23 5/8"	120 mm	4 3/4"				
M-120-R 3H L ZN		76972	25 - 40 kg	55.1 - 88.2 Lb	200 - 200	950	760	2915/16"	120 111111	43/4	()	M14	x 2	
M-140-R 3H ZN		76973	30 - 60 kg	66.1 - 132.3 Lb	200 – 400	1200	600	23 5/8"	140 mm	5 9/16"				
M-80 3H		76945	10 - 15 kg	22 - 33.1 Lb		500	400	15 ^{3/4} "	80 mm	3 3/16"		8 mm	5/16"	
M-100 3H		76946	45.00.		700 500	700		Da 11/1/11	400			10 mm	13/32"	
M-100 R 3H		76917	15 - 20 kg	33.1 - 44.1 Lb	300 - 500	700	550	21 11/16"	100 mm	4"				
M-120 R 3H	-	76918	15 - 25 kg	33.1 - 55.1 Lb		950			120 mm	4 3/4"	<i>(((((</i>))))		14.4.7	
M-140 R 3H		76919	25 - 40 kg	55.1 - 88.2 Lb	200 400	1200	600	23 ^{5/8} "	140 mm	5 9/16"	(((((((((((((((((((((((((((((((((((((((M14 x 2		
M-160 R 3H		76940	30 - 60 kg	66.1 - 132.3 Lb	200 -400	1500			160 mm	6 5/16"				
M-100 FI 3H		76941	15 - 20 kg	33.1 - 44.1 Lb	700 500	700	550	21 11/16"	100 mm	4"				
M-120 FI 3H		76942	15 - 25 kg	33.1 - 55.1 Lb	300-500	950	400	77.5/00	120 mm	4 3/4"		FAST-IN		
M-140 FI 3H		76943	25 - 40 kg	55.1 - 88.2 Lb	200-400	1200	600	23 5/8"	140 mm	5 9/16"				
E-80		65939	1 - 5 kg	2.2 - 11 Lb	300 - 500	700	400	15 ^{3/4} "	80 mm	3 3/16"		8 mm	5/16"	
L-80		65933	5 - 15 kg	11 - 33.1 Lb	700 (00	400	400	15 ^{3/4} "	80 mm	3 3/16"		8 mm	5/16"	
L-100	•	65934	15 - 25 kg	33.1 - 55.1 Lb	300 - 600	500	550	21 11/16"	100 mm	4"		10 mm	13/32"	
P-120 R	•	72954	15 - 30 kg	33.1 - 66.1 Lb	300 - 500	950	600	23 5/8"	110 mm	4 5/16"		M14	x2	
M-120 DUPLEX		25946	30 - 50 kg	66.1 - 110.2 Lb	480	1350	570	22 7/16"	120 mm	4 3/4"	(MMM)(A)	M27	x 1,5	















mixed



finish



finish







Liquids



Epoxi resin ##

<u></u>

XX



TOOLS FOR FIXING TILES AND FINISHINGS

Trowels, notched trowels, floats, rubber trowels and spatulas Markers, chisels, templates and auxiliary tools for tiling Mallets, Nippers and Grout Mortar Applicators








(o)

XX

SELECTION TABLE

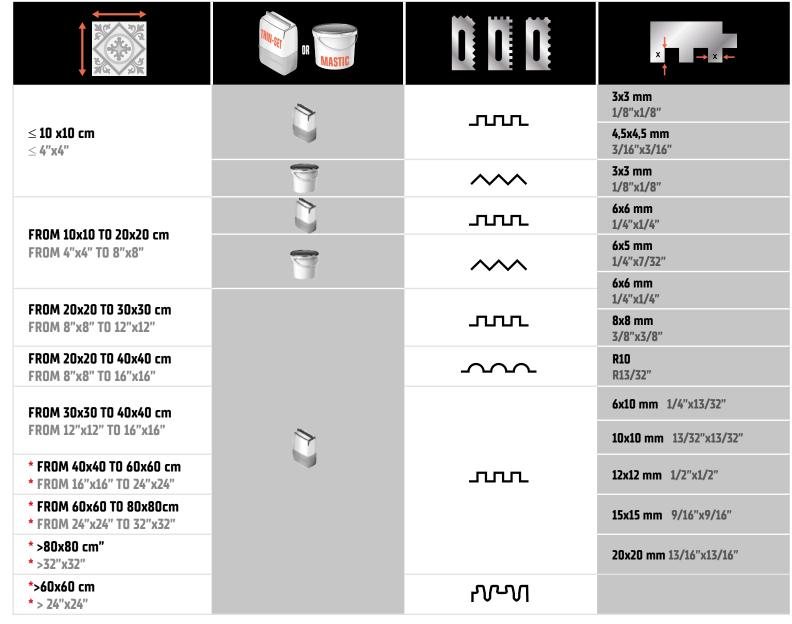

Basic conditions:

≥80% Adhesive coverage (dry indoor surfaces). Final layer thickness: 5 mm (3/16 °). BACK BUTTERING is not required.

*Back buttering is mandatory when the required coverage is ≥95% (for outdoors or damp areas) or pieces larger than 40 x 40. (16"x16"). To compensate for the bowing of the tile, add 2x** to the tooth size (** = deformation in the flatness of the tiles).







TROWELS AND NOTCHED TROWELS

CLOSED

HANDLE

CLOSED

HANDLE 48cm/19"

OPEN HANDLE

SPATULA

TROWEL

SHARP EDGES

SQUARE

TRIANGULAR

ROUND

YW

			_	DEN HAN					PLASTIC HANDLE				
			INOX		INOX			INOX	•	INOX	45°		
		65950	65960	65988	72915		75950	75970		72919		65951	25900
	SHARP		74948										
	3 x 3 mm 1/8 x 1/8"	65989				71923			72906	74936			25901
	4,5 x 4,5 mm 3/16 x 3/16"								74980	74937			25902
	6 x 6 mm 1/4 x 1/4"	65982		65958		71924	75955		72907	74938	75946	65966	25903
	6 x 10 mm 1/4 x 13/32"												
	8 x 8 mm 3/8 x 3/8"	65984		65959		71925	75957		72908	74940	75947	65967	25905
-	10 x 10 mm 13/32 x 13/32"	65985		65983		71926	75958		72909	74941	75948	65968	25906
	12 x 12 mm 1/2 x 1/2"	74947		73973			75959		74982	74942	75923		25907
	15 x 15 mm 9/16 x 9/16"									76947			
	20 x 20 mm 13/16 x 13/16"			75962									
	R10								72910		75924		
_	3 x 3 mm 1/8 x 1/8"												
	6 x 5 mm 11/4 x 7/32"								72911				
J	6 x 6 mm 1/4 x 1/4"												
Tabalahahaha	YW								77923				



##

(o)

Ċ

XX







##
























· Stainless steel plate special high wear resistance (INOX).

		,					
	REF	\triangle		111	J-JHR		
STEEL TROWEL 12" (30 CM.)	65950	SUPERPRO	0"	0"	0"	6	624
	02/20	JOI ENI NO	- mm	- mm	- mm		024
INOX TROWEL 12" (30 CM.)	65960	SUPERPRO	0"	0"	0"	6	480
MONTROWEE 12 (30 CM.)	03700	JOI ENI NO	- mm	- mm	- mm	0	700
SHARP EDGED INOX TROWEL 12" (30 CM.)	74948	SUPERPRO	0"	0"	0"	6	_
SHAKE EBBED MOX PROWEE IZ (30 CM.)	74740	JOI LINI NO	- mm	- mm	- mm		
STEEL NOTCHED TROWEL 11" (28 CM.) 1/8 X 1/8"(3 X 3 MM.)	45000	SUPERPRO	1/8"	1/8"	0"	6	624
SIELE NOICHED IKOWEETT (20 CM.) 1/0 / 1/0 (3 / 3 MM.)	65989 SUF	7 JUPLKPKU	3 mm	3 mm	- mm	U	024
STEEL NOTCHED TROWEL 11" [28 CM.] 1/4 X 1/4" [6 X 6 MM.]	65982	SUPERPRO	1/4"	1/4"	0"	6	624
SIELE NOTCHED TROWLETT (20 CM.) 1/4 × 1/4 (0 × 0 MM.)	03702	JUPLKPKU	6 mm	6 mm	- mm	U	024
STEEL NOTCHED TROWEL 11" [28 CM.] 3/8 X 3/8" [8 X 8 MM.]	65984	SUPERPRO	5/16"	5/16"	0"	6	624
JIELE NOTCHED IKOWEETT (20 CM.) 3/0 X 3/0 (0 X 0 MM.)	03704	JUPLKPKU	8 mm	8 mm	- mm	U	024
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32 X 13/32" (10 X 10	65985	SUPERPRO	3/8"	3/8"	0"	6	624
MM.]	כסלנט	JUPERPRU	10 mm	10 mm	- mm	U	024
STEEL NOTCHED TROWEL 11" [28 CM.] 1/2" X 1/2" [12 X 12 MM.]	74947	SUPERPRO	1/2"	1/2"	0"	6	624
	14/41	סיי בוורווט	12 mm	12 mm	- mm		024

19"(48CM) TROWELS & NOTCHED T. CLOSED WOOD HANDLE





· Perfect flatness of the plate.

 \cdot The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

	REF			111	J-JH		
STEEL TROWEL 19" (48 CM.)	65988	SUPERPRO	0" - mm	0" - mm	0" - mm	6	360
INOX TROWEL 19" [48 CM.]	72915	SUPERPRO	0"	0"	0"	6	360
STEEL NOTCHED TROWEL 19" [48 CM.] 1/4" X 1/4" [6 X 6 MM.]	65958	SUPERPRO	- mm 1/4"	- mm 1/4"	- mm 0"	,	7/0
SIEEL NUICHED IKUWEL 19 (48 CM.) 1/4 X 1/4 (6 X 6 MM.)	00708	SUPERPRU	6 mm	6 mm	- mm	6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 3/8" X 3/8" (8 X 8 MM.)	65959	SUPERPRO	5/16" 8 mm	5/16" 8 mm	0" - mm	6	360
STEEL NOTCHED TROWEL 19" [48 CM.] 13/32" X 13/32" [10 X 10 MM.]	65983	SUPERPRO	3/8" 10 mm	3/8" 10 mm	0" - mm	6	360
STEEL NOTCHED TROWEL 19" [48 CM.] 1/2" X 1/2" [12 X 12 MM.]	73973	SUPERPRO	1/2"	1/2" 12 mm	0"	6	360
STEEL NOTCHED TROWEL 19" [48 CM.] 13/16" X 13/16" (20 X 20	75962	SUPERPRO	12 mm 13/16"	13/16"	- mm 0"	6	360
MM.)			20 mm	20 mm	- mm		



##

(o)

t

××





 \cdot 7"(18 cm) wide plate. Special steel high wear resistance.

	REF	\triangle	- "	111		
STEEL NOTCHED SPATULA 7"	71923	PRO	1/8"	1/8"	12	3456
[18 CM.] 1/8"X1/8"[3X3 MM.]	/1923	PRU	3 mm	3 mm	12	3430
STEEL NOTCHED SPATULA 7"	71924	PRO	1/4"	1/4"	12	3456
[18 CM.] 1/4"X1/4" [6X6 MM.]	71724	PRU	6 mm	6 mm	12	3430
STEEL NOTCHED SPATULA 7"	71925	PRO	5/16"	5/16"	12	3456
[18 CM.] 5/16"X5/16"(8X8 MM.)	/1923	PRU	8 mm	8 mm	12	3430
STEEL NOTCHED SPATULA 7"	71926	PRO	3/8"	3/8"	12	3456
[18 CM.] 3/8"X3/8"[10X10 MM.]	/1720	PKU	10 mm	10 mm	12	J430



- · Levelling trowels wood handle.
- · Special high wear resistant steel plate.
- · Plate measures:15 3/4"x4 11/32"(40 x 11 cm).

	REF	\triangle		
LEVELLING TROWEL ROUND TIP	60996	SUPERPRO	2	288
LEVELLING TROWEL POINTED TIP	60997	SUPERPRO	2	288

TROWELS & NOTCHED T. CLOSED RUBIFLEX HANDLE





	REF			111	J-J-B		
STEEL TROWEL-12" (30 CM.)	75950	SUPERPRO	0"	0"	0"	6	
SIELE IROWEL 12 (30 CM.)	7770	JUPLKPKU	- mm	- mm	- mm	U	
INOX TROWEL 12" (30 CM.)	75970	SUPERPRO	0"	0"	0"	6	
INUX IRUWEL 12 (30 LM.)	/37/0	JUPERPRU	- mm	- mm	- mm	0	_
STEEL NOTCHED TROWEL 11" [28 CM.] 1/4"X1/4" [6X6 MM.]	75055	SUPERPRO	1/4"	1/4"	0"	6	624
31EEL NUTCHED TRUWEL 11 (20 CM.) 1/4 A1/4 (0A0 MIM.)	75955	JUPLKPKU	6 mm	6 mm	- mm	0	024
STEEL NOTCHED TROWEL 11" [28CM] 3/8"X3/8" [8X8 MM.]	75957	SUPERPRO	5/16"	5/16"	0"	6	624
STEEL NOTCHED TROWLE IT (20CM) 3/0 A3/0 (0A0 MM.)	12771	JUPLKPKU	8 mm	8 mm	- mm	U	024
STEEL NOTCHED TROWEL 11" [28CM] 1/2"X1/2" [10X10 MM.]	75958	SUPERPRO	3/8"	3/8"	0"	6	624
SIELE NOTCHED TROWLE II (20CM) 1/2 A1/2 (10A10 MM.)	7770	JUPLKPKU	10 mm	10 mm	- mm	U	024
STEEL NOTCHED TROWEL 11" [28 CM.] 1/2"X1/2" [12X12 MM.]	75959	SUPERPRO	1/2"	1/2"	0"	,	263
51EEL NUICHEU IKUWEL 11 (26 LM.) 1/2 X1/2 (12X12 MM.)	7 2727	JUPEKPKU	12 mm	12 mm	- mm	6	203




























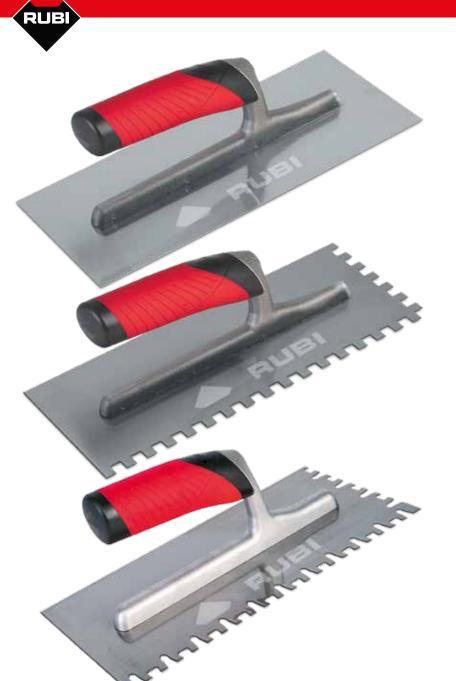

- · Extremely light and resistant aluminium core.
- · The connection between core and plate is very rigid.
- · Highly wear-resistant special steel sheet with protection against corrosion by means of colourless varnish (STEEL).
- · Special stainless steel sheet with high wear resistance (SS).
- · RUBIFLEX ergonomic handle with two textures.
- · Perfect blade flatness.
- · YW notched trowel (Ref.77923), with a distinctive and unique shape of notches (not rectangular) to achieve optimal wetting (near 100%) of the tile with the adhesive. Specially created for tiles for which wetting is key (large tiles),
- · and works very well with large format and SLAB type tiles.


	REF	\triangle		111	J-JH		
INOX TROWEL 11" [28 CM.]	72919	SUPERPRO	0"	0"	0"	6	270
			- mm 1/8"	- mm 1/8"	- mm n"		
STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	72906	SUPERPRO	3 mm	3 mm	- mm	6	270
INOX NOTCHED TROWEL 11" [28 CM.] 1/8"X1/8" [3X3 MM.]	74936	SUPERPRO	1/8"	1/8"	0"	6	270
	74730	JUPLKPKU	3 mm	3 mm	- mm		270
STEEL NOTCHED TROWEL 11" [28 CM.] 3/16"X3/16" [4.5X4.5 MM.]	74980	SUPERPRO	3/16"	3/16"	0"	6	270
			4.5 mm	4.5 mm	- mm		
INOX NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5X4.5 MM.)	74937	SUPERPRO	3/16"	3/16"	0"	6	270
			4.5 mm 1/4"	4.5 mm 1/4"	- mm n"		
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	72907	SUPERPRO	6 mm	6 mm	- mm	6	270
			1/4"	1/4"	N"		
INOX NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	74938	SUPERPRO	6 mm	6 mm	- mm	6	270
CTTEL MOTEUED TROUBEL 448 (20 CM) 7 (08/27 (08 (09/0 MM))	72000	CURERRA	5/16"	5/16"	0"	,	270
STEEL NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" (8X8 MM.)	72908	SUPERPRO	8 mm	8 mm	- mm	6	270
INOX NOTCHED TROWEL 11" [28 CM.] 3/8"X3/8" [8X8 MM.]	74940	SUPERPRO	5/16"	5/16"	0"	6	270
INDA NOTCHED INDWEL II (20 CM.) 3/0 A3/0 (0A0 MIM.)	74740	JUPERPRU	8 mm	8 mm	- mm		270
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	72909	SUPERPRO	3/8"	3/8"	0"	6	270
- STEEL HOTELE HOWELT (20 CM, 13/32 M3/32 (10/10 PM,)	72707	301 EN 10	10 mm	10 mm	- mm		270
INOX NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	74941	SUPERPRO	3/8"	3/8"	0"	6	270
			10 mm	10 mm	- mm		
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	74982	SUPERPRO	1/2"	1/2"	0"	6	288
		-	12 mm 1/2"	12 mm 1/2"	- mm n"	-	
INOX NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	74942	SUPERPRO	1/ 2 12 mm	1/2 12 mm	- mm	6	270
			9/16"	9/16"	N"		
INOX NOTCHED TROWEL 11" (28 CM.) 9/16"X9/16" (15X15 MM.)	76947	SUPERPRO	15 mm	15 mm	- mm	6	-
	77040		0"	0"	3/8"		270
STEEL NOTCHED TROWEL 11" (28 CM.) R-13/32" (10 MM.)	72910	SUPERPRO	- mm	- mm	10 mm	6	270
STEEL NOTCHED TROWEL TRIANGULAR 1/4"X7/32" [6X5 MM.]	72911	SUPERPRO	1/4"	3/16"	3/16"	6	270
STEEL HOTELES THOWEL THIMHOUGHT 174 NT/ 32 (ONS MIN.)	12/11		6 mm	5 mm	5 mm		210
STEEL NOTCHED TROWEL 28 CM. YW	77923	SUPERPRO		5/16 / 1/4"	0"	6	-
-			6 / 12 mm	8/7 mm	- mm		

45° NOTCHED TROWEL RUBIFLEX OPEN HANDLE









- · Special carbon steel alloy plate of high wear resistance.
- · Extremely light, high resistance aluminium reinforcement.
- · Highly rigid joint betwwen the reinforcement and the plate.
- · Ergonomic RUBIFLEX handle with two textures.
- · Clear coat for protection against corrosion.
- · Perfect flatness of the plate.

	REF	\triangle		111	J-J-H		
45° NOTCHED TROWEL 11" [28 CM] 1/4"X1/4" [6X6]	75946	SUPERPRO	1/4"	1/4"	0"	6	480
43 NOTCHED INDIVIDED 1 (20 CM) 1/4 A1/4 (0A0)	7740	JOELKEKO	6 mm	6 mm	- mm	U	400
45° NOTCHED TROWEL 11" [28 CM] 3/8"X3/8" [8X8]	75077	SUPERPRO	5/16"	5/16"	0"	,	480
45" NUICHED IKUWEL II (28 CM) 5/8 X5/8 (8X8)	75947	JUPERPRU	8 mm	8 mm	- mm	6	480
45° NOTCHED TROWEL 11" [28 CM] 13/32"X13/32" [10X10]	75948	SUPERPRO	3/8"	3/8"	0"	,	480
45" NUTCHED TRUWEL II (28 CM) 15/52 X15/52 (10X10)	/3948	SUPERPRU	10 mm	10 mm	- mm	6	480
45° NOTCHED TROWEL 11" [28 CM] 1/2"X1/2" [12X12]	75923	SUPERPRO	1/2"	1/2"	0"	4	480
43" NUILHED IKUVVEL II (20 LM) 1/2 A1/2 (12A12)	13923	JUPEKPKU	12 mm	12 mm	- mm	6	400
45° NOTCHED TROWEL 11" [28 CM] R-13/32" [10 MM.]	75924	SUPERPRO	0"	0"	3/8"	4	480
45" NUTCHED TRUWEL II (20 CM) R-13/32 (10 MM).)	73724	JUPERPRU	- mm	- mm	10 mm	6	400







 \cdot Steel plate special high wear resistance with corrosion protection by clear coat.

	REF	\triangle	1	111	J-JH		
STEEL TROWEL 12" (30 CM.)	65951	PRO	0"	0"	0"	6	624
			- mm	- mm	- mm		
NOTCHED TROWEL 11" [28 CM.] 1/4"X1/4" [6X6 MM.]	65966	PRO	1/4"	1/4"	0"	6	480
NUICHED IKUWEL II (28 CM.) I/4 XI/4 (6X6 MM.)	00700	1110	6 mm	6 mm	- mm	U	400
NOTCHED TROWEL 11" [28 CM.] 3/8"X3/8" [8X8MM.]	65967	PRO	5/16"	5/16"	0"	6	480
NUTCHED INDIVIDED (20 CM.) 3/0 A3/0 (0A0MM.)	03707	PRU	8 mm	8 mm	- mm	U	400
NOTCHED TROWEL 11" [28 CM.] 13/32"X13/32" [10X10 MM.]	4E040	nnn	3/8"	3/8"	0"		480
NUTCHED INDIVIDED IT (28 CM.) 13/32 A13/32 (10A10 MM.)	65968 PRO 1	10 mm	10 mm	- mm	6	480	




















































- \cdot Steel plate. Special high wear resistance.
- Plate trowel: 11" x 4" [28 x 12 cm].
 Plate notched trowel: 11" x 4" [28 x 12 cm].

REF	\triangle	H	111	J-JH		
25900	PRO	0"	0"	0"	6	720
		- mm	- mm	- mm		
25901	PRO	1/8"	1/8"	0"	6	720
		3 mm	3 mm	- mm		
רחחה	nnn	3/16"	3/16"	0"	6	720
237UZ PRU	PKU	4.5 mm	4.5 mm	- mm		
25903	PRO	1/4"	1/4"	0"	6	720
		6 mm	6 mm	- mm		
25905	PRO	5/16"	5/16"	0"	6	720
		8 mm	8 mm	- mm		
25906	PRO	3/8"	3/8"	0"	6	720
		10 mm	10 mm	- mm		
25907	PRO	1/2"	1/2"	0"	6	720
		12 mm	12 mm	- mm		
	25900 25901 25902 25903 25905 25906	25900 PRO 25901 PRO 25902 PRO 25903 PRO 25905 PRO 25906 PRO	25900 PRO 0" - mm 25901 PRO 3 mm 25902 PRO 3/16" 4.5 mm 25903 PRO 1/4" 6 mm 25905 PRO 5/16" 8 mm 25906 PRO 3/8" 10 mm 25907 PRO 1/2"	25900 PRO 0" 0" -mm -mm -mm 1/8" 1/8" 25901 PRO 3/16" 3/16" 25902 PRO 4/5 mm 4.5 mm 25903 PRO 1/4" 1/4" 25905 PRO 5/16" 5/16" 8 mm 8 mm 25906 PRO 3/8" 3/8" 10 mm 10 mm 25907 PRO 1/2" 1/2"	25900 PRO 0" 0" 0" -mm -mm -mm -mm 1/8" 1/8" 0" 3 mm 3 mm -mm 25902 PRO 3/16" 3/16" 0" 4.5 mm 4.5 mm -mm 25903 PRO 1/4" 1/4" 0" 6 mm 6 mm -mm 25905 PRO 5/16" 5/16" 0" 8 mm 8 mm -mm 25906 PRO 3/8" 3/8" 0" 10 mm 10 mm -mm 25907 PRO 1/2" 1/2" 0"	25900 PRO 0" 0" 0" 6 -mm -mm -mm 6 25901 PRO 3 mm 3 mm -mm 6 25902 PRO 4.5 mm 4.5 mm -mm 6 25903 PRO 1/4" 1/4" 0" 6 6 mm 6 mm -mm 6 25905 PRO 5/16" 5/16" 0" 6 8 mm 8 mm -mm 6 25906 PRO 3/8" 3/8" 0" 6 25907 PRO 1/2" 1/2" 0" 6

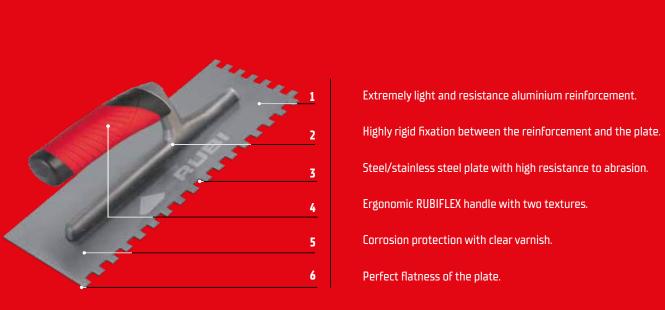



PFP01

PFP05



##

⊙

XX

BRICK TROWELS

· Perfect adaption in shapes, sizes and specific characteristics meeting the demands of each market.



· Ergonomic RUBIFLEX.

	REF	\triangle	28	S.	Å		
PFP01-120	75012	SUPERPRO	4 3/4"	2 7/8"	0.331 Lb		
MM. [4 3/4"]	/5012	SUPERPRU	120 mm	73 mm	0.150 kg	0	
PFP01-140	75014	SUPERPRO	5 1/2"	2 15/16"	0.348 Lb		
MM. (5 1/2")	/5014	SUPERPRU	140 mm	75 mm	0.158 kg	0	



· Ergonomic RUBIFLEX.

		^	0	0	_	1	
	REF		13	D.			
PFP05-180	75418	SUPERPRO	7"	4 1/8"	0.628 Lb	,	
MM. (7 1/16")	/5418	SUPERPRU	180 mm	105 mm	0.285 kg	Ď	
PFP05-200	75420	SUPERPRO	8"	4 5/16"	0.703 Lb	,	
MM. (7 7/8")	/5420	SUPERPRU	200 mm	110 mm	0.319 kg	0	

PFM06





· Varnished beechwood handle.

	REF	\triangle	28	X.		
PFM06-180	75510	CHDEDDDO	7"	5 1/8"	0.745 Lb	,
MM. (7 1/16")	35518	SUPERPRO	180 mm	130 mm	0.338 kg	0
PFM06-200	35520	SUPERPRO	8"	5 3/8"	0.794 Lb	,
MM. (7 7/8")	33320	SUPERPRU	200 mm	137 mm	0.360 kg	0

PFP10



· Ergonomic RUBIFLEX.

REF	\triangle	28	X.			
75017	CIINEDNDN	5 1/8"	2 3/4"	0.278 Lb	6	
7 3713	JUPERPRU	130 mm	70 mm	0.126 kg		
	REF 75913		75913 SUPERPRO 5 1/8"	75913 SUPERPRO 5 1/8" 2 3/4"	75913 SUPERPRO 5 1/8" 2 3/4" 0.278 Lb	

PFP19





· Ergonomic RUBIFLEX.

	REF	\triangle	28	S.	Å	
PFP19-80	76808	SUPERPRO	4 5/16"	3"	0.335 Lb	,
MM. (4 5/16")	/0808	SUPERPRU	109 mm	80 mm	0.152 kg	6
PFP19- 90	76809	SUPERPRO	5 1/16"	3 9/16"	0.37 Lb	,
MM. (5 1/16")	/0809	SUPERPRU	128 mm	90 mm	0.168 kg	6





PFP22



PFM23































	REF	\triangle	28	S	Å		
PFM22-165	37116	SUPERPRO	6 5/8"	4 11/16"	0.791 Lb		
MM. (6 5/8")	2/110	SUPERPRU	168 mm	119 mm	0.359 kg	0	
PFM22-180	37118	SUPERPRO	7 1/4"	4 7/8"	0.816 Lb	6	
MM. [7 1/4"]	3/118	SUPERPRU	184 mm	124 mm	0.370 kg		



0							
	REF	\triangle	28	X.			
PFP22-165	77116	SUPERPRO	6 5/8"	4 11/16"	0.807 Lb	6	
MM. (6 5/8")	//110	JUPERPRU	168 mm	119 mm	0.366 kg		
PFP22-180	77118	SUPERPRO	7 1/4"	4 7/8"	0.981 Lb		
MM. (7 1/4")	//118	SUPERPRU	184 mm	124 mm	0.445 kg	6	

· Varnished beechwood handle.

	REF	\triangle	28	S.			
PFM23-180A	37258	SUPERPRO	7 3/16"	4 5/8"	0.78 Lb		
MM. (7 3/16")	3/238	SUPERPRU	183 mm	117 mm	0.354 kg	0	





· Ergonomic RUBIFLEX handle.

	REF	\triangle	B	S.	Å		
PFP23-180 A	77258	SUPERPRO	7 3/16"	4 5/8"	0.796 Lb		
MM. (7 3/16")	//230	JUPEKPKU	183 mm	117 mm	0.361 kg		
PFP23-185 B	77268	SUPERPRO	7 1/8"	5 3/16"	0.86 Lb		
MM. (7 1/8")	//208	SUPERPRU	181 mm	131 mm	0.390 kg	6	

PFM24



· Varnished beechwood handle.

	REF	\triangle	28	S.			
PFM24-140	37314	SUPERPRO	5 1/2"	3 1/4"	0.322 Lb		
MM. (5 1/2")	3/314	JUPERPRU	140 mm	82 mm	0.146 kg	6	
PFM24-160	7771/	SUPERPRO	6"	3 5/8"	0.335 Lb	6	
MM. (6 5/16")	37316	SUPERPRU	160 mm	92 mm	0.152 kg		
PFM24-180	37318	SUPERPRO	7"	4 1/16"	0.564 Lb		
MM. [7 1/16"]	2/310	SUPERPRU	180 mm	103 mm	0.256 kg	6	

PFP24



· Ergonomic RUBIFLEX handle.

2.000		LL/\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\					
	REF	\triangle	B	S.			
PFP24-140	77314	SUPERPRO	5 1/2"	3 1/4"	0.34 Lb	,	
MM. (5 1/2")	77314	JUPLKPKU	140 mm	82 mm	0.154 kg	6	
PFP24-160	77316	SUPERPRO	6"	3 5/8"	0.337 Lb	6	
MM. (6 5/16")	11310	JUPERPRU	160 mm	92 mm	0.153 kg	0	
PFP24-180	77318	SUPERPRO	7"	4 1/16"	0.58 Lb	,	
MM. [7 1/16"]	//518	SUPERPRU	180 mm	103 mm	0.263 kg	6	
PFP24-200	77320	SUPERPRO	8"	4 5/16"	0.606 Lb	,	
MM. (7 7/8")	11320	SUPERPRU	200 mm	110 mm	0.275 kg	6	





PFM26



PFP33



PFM55



#

(o)

XX









· Ergonomic RUBIFLEX handle.



· Varnished beechwood handle.



· Ergonomic RUBIFLEX handle.



· Special for tile installers, sharp arrow.





- 1 Special white nylon lap for tapping without staining.
- **2** Wooden handle in varnished beech.
- 3 Nickel-plated notched ring to increase handle fixation.
- 4 Solid, non-detachable mounting between handle and pin.
- 5 Fusion technique to forging temperature. Fully guaranteed for life against breakage.
- **6** Perfect flatness of the entire plate.
- 7 Plate protected against corrosion.
- **8** Fibres oriented lengthwise during plating.
 - Specific thermal treatment on:
 - · Plate, to improve flexibility and prevent wear-off
 - Pin. to improve hardness and rigidness.
- **9** Maximum lightness retaining its resistance.
- 10 Total regularity of all fabrications.
- 11 Perfect adaptation of shapes, sizes and specific characteristics of each market demands.





o

RUBI BRICK TROWEL RANGE

mm 🕨	80	90	110	120	130	140	150	160	165	170	180	185	200
inch 🕨	3 5/32"	3 9/16"	4 11/32"	4 3/4"	5 1/8"	5 17/32"	5 24/32"	6 5/16"	6 1/2"	6 23/32"	7"	7 5/16"	7 7/8"
PFP01				75012		75014							
PFP05											75418		75420
PFM06											35518		35520
PFP10					75913								
PFP19	76808	76809											
PFM22							37115		37116		37118		
PFP22							77115		77116		77118		
PFM23											37258	37268	
PFP23											77258	77268	
PFM24						37314		37316			37318		
PFP24						77314		77316			37318		77320
PFP25											77418		
PFM26													37520
PFP33										79050			
PFP53			78211										
PFM54			38311										
PFM55						38414			38416				



FLOATS

· Plaster floats

RETICULATED POLYETHYLENE FLOATS





- · For finish floating mortar plastering.
- · Maximum ligthness and resistance to wear off.
- Very low water absortion. Guarantees dimensional stability.

	REF	\triangle	
POINT TIP POREX TROWEL 8 7/8" X 5 1/2" (24 X 14 CM)	83998	SUPERPRO	10
RECTANGULAR POREX TROWEL 8 7/8" X 5 1/2" (24 X 14 CM)	83999	SUPERPRO	10

POREX FLOATS





- · For plastering walls.
- · Density and hardness permits an even finish.

	REF	\triangle		
POINT TIP POREX TROWEL 9 1/2" X 5" (24 X 14 CM.)	83993	PRO	10	240
RECTANGULAR POREX TROWEL 9 1/2" X 5" (24 X 14 CM.)	83992	PRO	10	240

ROUGH PLASTIC HANDLE FLOATS





- · Reinforced plate of high resistance to abrasion and long durability.
- · Perfectly flat base.

	REF	\triangle		
POINT TIP FLOAT 10 X 5" (27 X 14 CM.)	71941	PRO	10	360
RECTANGULAR FLOAT 10" X 7" (27 X 18 CM.)	71943	PRO	10	240
RECTANGULAR FLOAT 13" X 9" (34 X 23 CM.)	71944	PRO	10	180

RUBBER GROUT FLOATS

- Rubber floats for grouting, with ergonomic or wooden handles.
- · Available in different rubber to obtain the best finishing according to the joint width.

REPLACEABLE GROUT FLOAT PRO





- \cdot Grout Float (Ref.84924) with sheet resistant to abrasion.
- · Replaceable with spare (ref. 84925).

replaceable with spare (i.e., 6.17	2 J J .		
	REF	\triangle	
REPLACEABLE GROUT FLOAT PRO	84924	PRO	6
SPARE GROUT FLOAT PRO	84925	PRO	15



























0









- · Wood ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF	\triangle		
RUBBER GROUT FLOAT SUPERPRO	65970	SUPERPRO	6	540
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65976	SUPERPRO	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65975	SUPERPRO	6	540

GROUT FLOATS SUPERPRO PLASTIC





- · Plastic ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF	\triangle		
RUBBER GROUT FLOAT SUPERPRO	65971	SUPERPRO	6	540
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	SUPERPRO	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972	SUPERPRO	6	540

GROUT FLOATS PRO









- · Black foam rubber.
- · Grout Float PRO 9"x4" 22.5x10cm. (Ref.10607), with white rubber sheet wear resistant.

	REF	\triangle		
RUBBER GROUT FLOAT 9"X4"X19/32" (22,5X10X1,5CM)	10607	PRO	6	384
GROUT FLOAT PRO 9 1/2"X4 3/4"X13/32" (24X12X1CM)	24968	PRO	10	
GROUT FLOAT PRO 11"X5"X13/32" (28X14X1CM)	24969	PRO	10	360



XX

FLOATS AND TROWELS FOR

 Floats for the correct aplication and smoothing of plaster.

PLASTER FLOATS















#











XX











· For multi finish and skimming plaster jobs (also

compatible with microcement).

· Ideal for vertical jobs in heights.


FLEXIBLE FINE PLASTIC HANDLE FLOAT

· 1,2 mm thick polypropylene (PP) plate.





72824 SUPERPRO



· Includes grip and aluminium holder.

9 .			
	REF	\triangle	
FLOOR TILE GROUT SPATULA 24" (60 CM.)	70905	SUPERPRO	1

PLASTER

WALL TILE GROUT SPATULA

· Flexible polyethylene and nonstick base.

PLASTIC HANDLE FLOAT 12" X 5" (30 X 14 CM.) 71904





· For filling joints.

	REF		
WALL TILE GROUT SPATULA 7" (18 CM.)	65954	PRO	1
WALL TILE GROUT SPATULA 13" (35 CM.)	65935	PRO	1

SPATULAS

 Great variety of spatulas for multiple purposes.

















· Adaptable to WOODEN HANDLE(Ref. 65450) Not included.

	REF	\triangle	
GENERAL PURPOSE SPATULA 17" (44 CM.)	65919	PRO	1
GENERAL PURPOSE SPATULA 24" (60 CM.)	70902	PRO	1

· Adaptable to floor tile grout spatula 50, 60 and 75 cm.

	REF	\triangle	
ALUMINIUM HANDLE	70904	SUPERPRO	1

· Holder for general purpose spatula of 44cm Ref.65919 and 60cm Ref.70902.

	REF	\triangle	
WOODEN HANDLE	65450	PRO	1

STAINLESS STEEL PAINT SPATULA RUBIFLEX HANDLE





· Stainless steel plate with ergonomic RUBIFLEX handle.

	REF		
STAINLESS STEEL PAINT SPATULA 1" 5/8 (40 MM.)	73909	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 2" 1/2 (63 MM.)	73914	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 3" (75 MM.)	73911	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 4" (100 MM.)	73912	SUPERPRO	10
STAINLESS STEEL PAINT SPATULA 6" (150 MM.)	73913	SUPERPRO	10



XX

##

(o)

<u>t</u>

SCRAPERS

· Mortar scrapers, single layer, joints and plaster.

FACADE MORTAR SCRAPER 16" X 2 7/8" (50X72MM)





- · Facade mortar scraper with wooden handle.
- · Plate dimensions: 6x2 7/8" (150x72mm).

	REF	\triangle	
WOODEN HANDLE SCRAPER 6X2" 7/8 (150X72 MM.)	65963	SUPERPRO	6

FACADE MORTAR SCRAPER 10" X 5 3/4" (250X144MM)





- · Facade mortor scraper with two types of handles: Wood
- · plate dimensions 10" x 5 3/4" (250x144mm).

		,		
	REF	\triangle		
WOODEN HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	72960	SUPERPRO	6	480
PLASTIC HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	65962	SUPERPRO	6	480
SPARE SCRAPER 10" X 5 3/4" (250X144 MM.)	65957	SUPERPRO	18	-

ALUMINIUM PLASTER SCRAPER





- · Completely manufactured with aluminium, with 8 blades.
- · Dimensions 18" x 3 13/32" (455 x 86 mm).

	REF	\triangle		
ALUMINIUM PLASTER SCRAPER	72961	SUPERPRO	2 Lb 0.9 kg	1

JOINT SCRAPER





- · Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- · Useable with 1, 2 or 3 plates depending on width of the joint.
- · Supplied in blister.

	REF	\triangle		
JOINT SCRAPER	65907	PRO	5	600
SPARE JOINT SCRAPER	71974	PRO	10	4600



































RUBISCRAPER-250

For grout removal without damaging the tile.





- Ergonomic design and bi-material finishing, for greater comfort and better stability.
- 2 Light and resistant. Maximum reliability.
- 3 Blades made in tungsten carbide. Resharpenable for a greater performance. Patented model.
- Fast locking / unlocking system for easy assembly of blade.
- · Ideal for repair work (replacement of broken tiles).
- Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.
- · Power: 250 W.
- · Stroke length: 2 mm.
- · Double insulation.
- · Blades for joints of 1.5 mm (ref. 66810, use only with speed 1) and 3 mm (ref. 66812) included.
- · Includes 2 special blades (steel made) to remove rests of thinset from the back of the tiles or on the substrate.
- · With transport case.
- · Interchangeable blades for 1.5,2,3 and 4 mm joints.

	Accessories:
M	RUBISCRAPER Blades












	REF	\triangle	5	W	
RUBISCRAPER-250	66940	SUPERPRO 230	IV-50Hz	250 W	1
RUBISCRAPER-250 UK	66941	SUPERPRO 230	IV-50Hz	250 W	1
RUBISCRAPER-250 USA	66942	SUPERPRO 120	V-60Hz	250 W	1

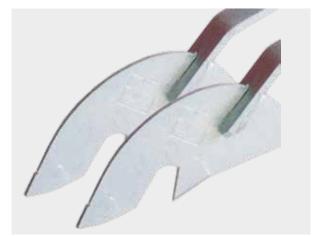



##























· Resharpenable and easily interchangeable blades, available for 1.5mm (use only with speed 1), 2mm, 3mm and 4mm grout sizes.

	REF	\triangle	
1.5 MM (1/16") BLADE FOR RUBISCRAPER	66810	SUPERPRO	1
2 MM (3/32") BLADE FOR RUBISCRAPER	66811	SUPERPRO	1
3 MM (1/8") BLADE FOR RUBISCRAPER	66812	SUPERPRO	1
4 MM (5/32") BLADE FOR RUBISCRAPER	66813	SUPERPRO	1

MARKERS, SUPPORTS AND TEMPLATES

 Wide range of markers, supports and templates for the placement of tiles.

RULE SUPPORT SET





· For easy adjustment and levelling of the rule for wall tiling.

· In box of 2 units.

	REF	\triangle		
RULE SUPPORT SET 12" (30 CM.)	60991	SUPERPRO	1	207
RULE SUPPORT SET 20" (50 CM.)	60998	SUPERPRO	1	

RULE HOLDER NAILS





SHAPE TEMPLATE



· Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 4.5cm.

	REF	\triangle	
SHAPE TEMPLATE	70925	SUPERPRO	10

HOLE MARKER






 For marking the position of holes for tubing and electrical fitting, from the wall to the tile, for subsequent cutting or drilling.

· Maximum length 26" (65cm).

	REF	\triangle	
HOLE MARKER XL	72953	SUPERPRO	6



	REF	\triangle	
RULE HOLDER NAIL 10" (250 MM.)	72941	SUPERPRO	6



XX

(o)

MASTER LINE MARKER





- · Ideal system to quickly draw straight lines between two points of the wall or floor.
- · Supplied with a bottle of high quality powder for line marker.

	REF	\triangle	
MASTER LINE MARKER	70928	SUPERPRO	6

HIGH QUALITY BLUE POWDER FOR LINE MARKER





· Blue powder for filling the line marker.

	REF	\triangle	
SPARE BLUE POWDER FOR LINE MARKER 2.2 LB. (1 KG.)	70929	SUPERPRO	6

"MASTER-N" LINE MARKER





- Ideal system to quickly draw straight lines between two points of the wall or floor.
- Supplied with a bottle of high quality powder for line marker.
- · Manufactured in plastic bimaterial (RUBIFLEX)high resistance to impact.
- · Includes auxiliary level for leveling rope before tagging.
- · Length of rope: 30 m.

	REF	\triangle	
"MASTER-N" LINE MARKER	75925	SUPERPRO	6

CONSTRUCTION PENCIL





- · Specially designed for writing on wet or glazed surfaces like ceramic tile, marble, granite, etc.
- \cdot Set of 2 construction pencils supplied in blister.

	REF	\triangle		
CONSTRUCTION PENCIL	65942	SUPERPRO	50	450

STANDARD LINE MARKER



##

(o)

XX



- · Ideal system to quickly draw straight lines between two points of the wall or floor.
- Supplied with a bottle of high quality powder for line marking.
- · Length of rope: 15m.

	REF	\triangle	
LINE MARKER W/TRACING POWDER	70926	SUPERPRO	6

LINE REEL





· High resistance polyester cord.

	REF	\triangle	
LINE REEL Ø 3/8X164 FT. (1.7 MM. X 50 M)	80933	SUPERPRO	12



(o)

XX

MALLETS

 Mallets for levelling the height of the TILES through out installation.







· A softer mace to protect the ceramic pieces.

	REF	\triangle		
SOFT BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	88555	SUPERPRO	50	600
SOFT BLACK RUBBER MALLET 26.4 07. (750 GR.)	88553	SUPERPRO	40	480

RUBBER MALLET - 2 FLAT SIDES





 \cdot Allows to strike at any angle so as to install the tile into its correct position.

	REF	\wedge		A
	NEF	\leftarrow		
BLACK RUBBER MALLET 8.8 OZ.	65904	SUPERPRO	4	336
(250 GR.)	03704	JUPERPRU	0	330
BLACK RUBBER MALLET 17.6 OZ.	/F00F	CHDEDDDO	,	77 /
(500 GR.)	65905	SUPERPRO	0	336
BLACK RUBBER MALLET 26.4 OZ.	/F000	CHDEDDDO	,	252
(750 GR.)	65908	SUPERPRO	6	252

RUBBER MALLET - FLAT/ SPHERICAL SIDES





 \cdot Allows to strike at any angle. One flat surface and the other spherical.

	REF	\triangle		
WHITE RUBBER MALLET 8.8 OZ. [250 GR.]	66905	SUPERPRO	6	336
WHITE RUBBER MALLET 17.6 OZ. (500 GR.)	66906	SUPERPRO	6	336
WHITE RUBBER MALLET 26.4 OZ. [750 GR.]	66907	SUPERPRO	6	252

SUCTION CUPS

 Suction cups to facilitate the handling of ceramics and other smooth materials.

SINGLE SUCTION CUP





· Maximum load capacity: 88 Lb (40 kg).

	REF	\triangle	
SINGLE SUCTION CUP	65900	PRO	1



RM ROUGH SURFACE **SUCTION CUP**



DOUBLE SUCTION CUP



RM ROUGH SURFACE DOUBLE **SUCTION CUP**



曲

(

Ġ

XX





- · Suction cups for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- · Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 25 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle	
RM ROUGH SURFACE SUCTION CUPS	66929	SUPERPRO	1



- · Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load capacity: 176,4LB (80 kgs).

	REF	\triangle	
DOUBLE SUCTION CUP	66900	PRO	1





TRIPLE SUCTION CUP



- · Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load of capacity: 220lbs (100 kg).

	REF			
TRIPLE SUCTION CUP	66904	PRO	1	80

PUMP SC-200



- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 110kg.

	REF	\triangle	
SUCTION CUP WITH VACUUM PUMP SC-200	18919	PREMIUM	1

· Double suction cup for handling tiles with rough and/or slightly structured surfaces.

- · Body made of highly resistant aluminium.
- · Metal reinforcement in the lever base for greater tensile
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- Maximum load capacity: 55 kg.
- · Suction cup diameter: 120 mm.

	REF	\triangle	
RM ROUGH SURFACE DOUBLE SUCTION CUP	66952	SUPERPRO	1

GSC-200 GREY VACUUM SUCTION





NEW

- · Suction cup for the manipulation of largeceramictiles and heavy porcelain slabs.
- · Adapts to any surface without leaving any marks.
- · Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- · Pressure relese mechanism.
- · Maximum load capacity: 110 kg.
- · High resistanceplastic body.

	REF	\triangle	*	
GSC-200 GREY VACUUM SUCTION	21951	PREMIUM	3.3 Lb	1
doc-200 dref vacoum sociion	21731	PREMIUM	1.5 kg	





ABRASIVE BLOCK



GLUE GUN APPLICATOR





- · Glue applicator 55 W. High performacnce.
- · 100~240V/50-60Hz.
- · Compatible with bars of 011 012mm.
- · Universal glue.

	REF	\triangle		
GLUE GUN APPLICATOR	65940	PRO	6	432
25 GLUE BARS OF 6" (175 MM.)	65946	PRO	10	800



- · Fine and coarse grit.
- · Smooths out tiles.

	REF	\triangle	
ABRASIVE BLOCK	05972	SUPERPRO	5

A. C.

(o)







· Work bench for all types of jobs.







- · 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- · Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal frame.
- · Folded table: 80x52x12,5cm.
- · Unfolded table: 115x52x80cm.

	REF	\triangle		
FOLDING 4-IN-1 WORKING TABLE	66924	SUPERPRO	1	16



PROFESSIONAL TOOL BOX


TOOLS BOXES

· Tool boxes for the construction professional.



- · Large tool box. With wheels and handles for transport.
- · Lid with 2 pockets and 4 hangers to fix objects with rubber bands (Not
- · It contains internal tray with 4 compartments.
- · Outer Dimensions: 31" x 19" x 20" [80 x 49 x 50 cm].
- · Inner Dimensions: 24" x 14" x 16" (62 x 35 x 41 cm).
- · Capacity: 25 GL (89 L).

	REF	\triangle		
PROFESSIONAL TOOL BOX	75965	SUPERPRO	1	4

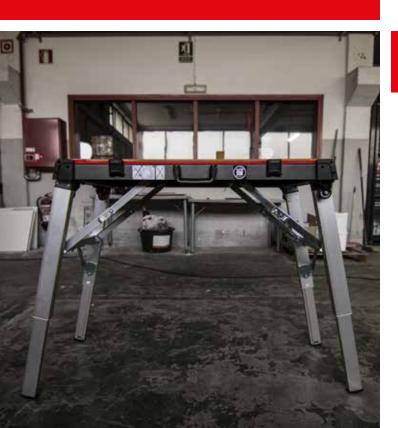

PLASTIC TOOL BOX



- · Light and highly functional tool box. With wheels and handle for
- · Comes with 2 holders and 4 fitments for attaching objects using elastic
- · Consists of 1 tray with 14 compartments that can be configured to specific needs and 1 inside tray with 4 compartments.
- · Capacity 15 GL. (55 L).
- · Outer Dimensions: 24" x 14" x 16" (61 x 37 x 42 cm).
- · Inner Dimensions: 20" x 12" x 14" (51 x 31 x 35 cm).

	REF	\triangle		
PLASTIC TOOL BOX	71954	SUPERPRO	1	8

































 (\circ)

XX

MALLETS & HAMMERS

 Mallets and hammers of great quality with two types of handles, wood and RUBIFLEX.



- · Special forged Steel head, tempered and hardened.
- SPANISH type head with electrostatic black paint coating and milled hitting ends.
- · Varnished, HICKORY wood handle.
- · Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- · Weight balanced to reduce hand's kickback.

	REF	\triangle	
STONING HAMMER WOOD HANDLE 700 GR.	71896	SUPERPRO	6

FRAMER HAMMER RUBIFLEX HANDLE





- Forged, adjusted and tempered steel head of 28.2 oz (800gr). Double placer / remover for nails, one magnetised.
- Ergonomic handle RUBIFLEX: Unbreakable structure with resistant-section fibre-glass nucleus, optimised for shock absorption, increasing the durability of the handle.
- Security connection between handle and steel head by inverse cone.
- Grip with elastic slip-proof elastic and surface grooves for maximum hold.

	REF	\triangle	
FRAMER HAMMER 20" (500 MM.)	82986	SUPERPRO	6

STONING HAMMER SOFTGRIP HANDLE





- · Special forged Steel head, tempered and hardened.
- \cdot SPANISH type head with electrostatic black paint coating and milled hitting ends.
- PP handle with fibre glass core, optimal for shock absorption. Improves handle's long-life.
- · Bi-material SOFTGRIP handle, non-slippery and grooved for a better grip.
- · Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- · Weight balanced to reduce hand's kickback.

	REF	\triangle	
STONING HAMMER SOFTGRIP HANDLE 700 GR.	71898	SUPERPRO	6
STONING HAMMER SOFTGRIP HANDLE 1000 GR.	71899	SUPERPRO	6



CHISELS

· Wide range of chisels, point chisels and nippers.

FLAT CHISELS





- · Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.
- · Regrindable.

	REF	\triangle	
CHISEL 10" X 29/32" X 17/32" (250 X 23 X 13 MM.)	70916	SUPERPRO	10
CHISEL 12" X 29/32" X 17/32" (300 X 23 X 13 MM.)	70917	SUPERPRO	10
CHISEL 14" X 29/32" X 17/32" (350 X 23 X 13 MM.)	70918	SUPERPRO	10

WIDE CHISELS

· To remove tiles on renovation jobs.

WIDE CHISEL 10"/2 3/8" X 1 1/32" X 17/32"

cutting edge. · Regrindable.

[250/60X26X13MM]

 \cdot Made of CrVa. alloy steel. Forged, hardened and tempered

70924 SUPERPRO


























- \cdot Made of special tempered steel, highly resistant at breaking point.
- · Normalised heat treatment and tempered tip.

	REF	\triangle	
ASON PICK (SPADE/PICK) 18 OZ. (500 GR.)	82980	SUPERPRO	6

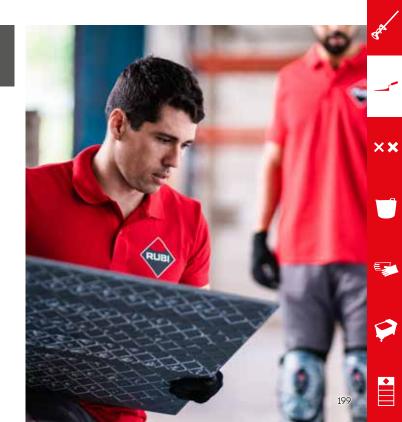

MASON PICKS

 \cdot Made of special tempered steel, highly resistant at breaking.



(o)

XX

SHOVELS

 Shovels and spades with varnished, wooden handle and spades highly resistant at breaking point.

WOODEN RING HANDLED SQUARE SHOVEL



PROP HANDLED SQUARE SHOVEL







- · Squared shovel with wooden handle "Y" shaped.
- · Ergonomic grip. Varnished wooden handle.

	REF	\triangle		
WOODEN RING HANDLED SQUARE SHOVEL	82960	SUPERPRO	6	36

- · Squared shovel with wooden handle "T" shaped.
- · Varnished wooden handle.

	REF	\triangle		
PROP HANDLED SQUARE SHOVEL	82961	SUPERPRO	6	36

WOODEN RING HANDLED POINT-TIPPED SPADE












- · Shovel with D finish.
- · Handle with "Y" ring shaped plastic.
- · Ergonomic grip, varnished eucalyptus.

_		
6	36	SUPERPRO
	0	0 30

- · Shovel with " D " shape finish.
- · Handle T shaped. Varnished wooden handle.

	REF	\triangle		
PROP HANDLED POINT-TIPPED SPADE	82964	SUPERPRO	6	36

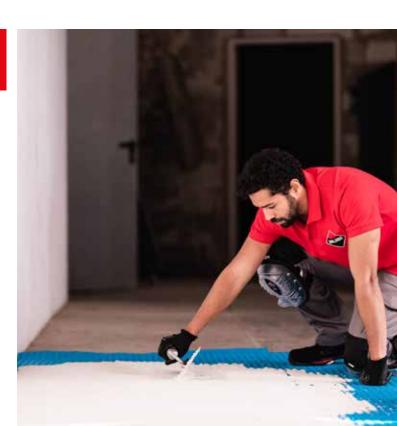

· Range of nippers for different uses. For porcelain, • mosaics and other

CARPENTER'S PINCER





- · Specially for cutting narrow strips of a maximum of 7/16" [1cm].
- · Replaceable scoring wheels (Ref:01953).

NIPPERS FOR PORCELAIN

TILES

· Equipped with tungsten carbide scoring wheels with titanium surface treatment to last longer. With a gentle turn, the scoring wheels can be repositioned when they start getting worn.

	REF	\triangle		
NIPPERS FOR PORCELAIN TILES	83942	SUPERPRO	5	765

NIPPERS

materials.

· For general use.

· Supplied in blister.

	REF	\triangle		
CARPENTER'S PINCER 8 3/4" (220 MM.)	71971	SUPERPRO	5	765

PARROT NIPPERS





NIPPERS FOR CERAMIC TILES



NIPPERS FOR GLASS MOSAIC



#

(o)

XX



- · Tungsten carbide edge of great hardness.
- · To rectify holes on ceramics.

	REF	\triangle		
PARROT NIPPERS	65925	SUPERPRO	5	765

- · Tungsten carbide edge of great hardness.
- · To rectify cuts of ceramics.

	REF	\triangle	
NIPPERS FOR CERAMIC TILES	65926	SUPERPRO	6

- · Tungsten Carbide edge of great hardness.
- · To cut and rectify glass mosaic tiles.

	REF	\triangle	
NIPPERS FOR GLASS MOSAIC	71970	SUPERPRO	5





0



Joint applicator for mortar.



- · Great capacity (650 cc) grout mortat applicator.
- · Very light structure made of aluminium.
- · It allows an easy, quick and clean application.
- · Reduce consumption of grout and after grouting residue.
- · Pressure adjustable with trigger.
- · Replaceable and adjustable nozzles to the joint width.
- · Also usable for the application of silicone and PU rigid and flexible cartridges.
- · Quick and clean application.

	REF	\triangle	
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	SUPERPRO	1



SET OF SPARE NOZZLES FOR GROUT MORTAR APPLICATOR



SPARE NOZZLES





- · Spare parts adaptable to Electric (Ref. 66915) and Manual (Ref. 65990) applicators.
- · Includes screw, piston and 3 nozzles.

	REF	\triangle	
SET OF SPARE NOZZLES FOR GROUT MORTAR	65981	SUPERPRO	0
APPLICATOR	03781	SUPERPRU	9



- · Spare parts adaptable to Electric (Ref. 66915) and Manual (Ref. 65990) applicators.
- · Includes 6 nozzles.

	REF	\triangle	
SPARE NOZZLES FOR GROUT MORTAR	4E000	SUPERPRO	1
APPLICATOR	03980	SUPERPRU	1





ACCESSORIES FOR TILE FIXING AND FINISHING

Measuring systems
Tile spacers
Fast levelling systems







 \odot

CONSTRUCTION LEVELS

• Wide range of levels.







- · Level manufactured with reliable, resistant aluminium.
- Machined base to ensure consistent accuracy and Neodymium magnets inserted to hold it on metal surfaces.
- · Accuracy: 0,5 mm/m.
- Three bubbles for checking horizontal, vertical and 45° levels.

	REF	\triangle		
RUBILEVEL MAGNET 20" (50 CM.)	76929	PRO	8	1920
RUBILEVEL MAGNET 24" (60 CM.)	76930	PRO	8	1600
RUBILEVEL MAGNET 32" (80 CM.)	76931	PRO	8	1120

RUBILEVEL



- · Level manufactured in reliable, resistant aluminium.
- · Machined base up to measures of 100 cm to ensure constant accuracy.
- \cdot Accuracy: 0,5 mm/m three bubbles for checking horizontal, vertical and $45^{\rm o}$ levels.



	REF	\triangle		
RUBILEVEL 16" (40 CM.)	76920	PRO	8	2400
RUBILEVEL 24" (60 CM.)	76922	PRO	8	1600
RUBILEVEL 32" (80 CM.)	76923	PRO	8	1120
RUBILEVEL 40" (100 CM.)	76924	PRO	8	
RUBILEVEL 59" (150 CM.)	76926	PRO	2	448
RUBILEVEL 79" (200 CM.)	76927	PRO	2	448

RUBILEVEL ANTISHOCK



- · Levels manufacturated in reliable, resistant aluminium.
- Double machining to ensure a constant precision in the top face and the base.
- · Accuracy: 0,5 mm/m.
- · Three bubbles for checking horizontal, vertical and and 45° levels.
- · Double and ergonomic bi-material handle.
- · Rubber protector at the ends.
- \cdot DUAL view vertical vial for front measurements. Eliminates parallax error.
- · MAGNIFIED horizontal vial for the CLEAREST view of the bubble.



	REF	\triangle		
RUBILEVEL ANTISHOCK 24" (60 CM.)	76932	SUPERPRO	8	672
RUBILEVEL ANTISHOCK 32" (80 CM.)	76933	SUPERPRO	8	504
RUBILEVEL ANTISHOCK 40" (100 CM.)	76934	SUPERPRO	8	392
RUBILEVEL ANTISHOCK 48" (120 CM.)	76935	SUPERPRO	8	392





WATER LEVEL





##

(o)

<u>t</u>



- · Includes two graduated tanks and 20 metres of hose.
- · With caps to maintain the hose correctly filled & ready for the next use.

	REF	\triangle	
WATER LEVEL	70965	PRO	1



· Level manufactured from cast aluminium.

- · Machined base to ensure constant accuracy.
- · Accuracy: 0,5 mm/m.
- Two bubbles for checking horizontal and vertical.
- DUAL view vertical vial for front measurements. Eliminates parallax error.

	REF	\triangle		
RUBILEVEL ALUCAST 20" (50 CM.)	76937	SUPERPRO	8	1920
RUBILEVEL ALUCAST 24" (60 CM.)	76938	SUPERPRO	8	1600
RUBILEVEL ALUCAST 32" (80 CM.)	76939	SUPERPRO	8	1120

MEASURING TAPES

· Homologated precision measuring tapes. Two models available.

RUBIFLEX MEASURING TAPES





- · Ergonomic chassis made from plastic and rubber.
- · Approved precision measuring tapes: Class II
- · Magnetic tape stopper. (only available in mm).

	REF	\triangle		
RUBIFLEX MEASURING TAPE 197" X 3/4" (5M X 19MM)	75901	SUPERPRO	12	864
RUBIFLEX MEASURING TAPE 315" X 1" (8M X 25MM)	75902	SUPERPRO	12	576

IRONBLADE MEASURING TAPES





- · Metal case with rubber coating to improve grip.
- · Approved precision measuring tapes: Class II
- · Automatic tape lock. (only available in mm).

	REF	\triangle	
IRONBLADE MEASURING TAPE 197" X 3/4" (5M X 19MM)	75904	SUPERPRO	12
IRONBLADE MEASURING TAPE 197" X 3/4" (5M X 25MM.) DOUBLE MARKING	75909	SUPERPRO	12
IRONBLADE MEASURING TAPE 315" X 3/4" (8M X 25MM)	75905	SUPERPRO	12



(o)

PLUMB BOB

· Length of line:16,4 ft.(5 m).

· Includes wooden dolly. · Supplied in blister.

PLUMB BOB 21.2 OZ. [600 GR.]









SQUARES

- · Square 1 5/8" x 13/16" (40x20mm) with high dimensional stability.
- · With bichromated treatment.

	REF	\triangle	
SQUARE- 24" (60 CM.)	60993	SUPERPRO	1
SQUARE- 32" (80 CM.)	60994	SUPERPRO	1

PLUMB BOB

· Plumb bobs.

SQUARES

TILE SPACERS 1/32" [1MM]

REF

70964 SUPERPRO



TILE SPACER 1/16" (1.5MM)



TILE SPACERS & WEDGES

• Tile Spacers, "T" Spacers and wedges for the correct placement of tiles. Quality base material.



· Quality base material, without impurities or imperfections.

, ,				
	REF	\triangle		
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	02911	SUPERPRO	10	1200
TILE SPACERS 1/32" (1 MM.) - (B- 1000 U.)	02030	SUPERPRO	1	540

- · For wall & floor tiles with minimum joint.
- Quality hase material without impurities or imperfections

Quality base material, wi	ciioac iiii	pullucs of	шрсп	iccions.
	REF	\triangle		
TILE SPACERS 1/16" (1.5 MM.) - (B-300 U.)	02912	SUPERPRO	10	960
TILE SPACERS 1/16" (1.5 MM.) - (B-1.000 U.)	02031	SUPERPRO	1	432





LONG TILE SPACERS 3/32" [2 MM L]



TILE SPACERS 1/8" (3MM)



曲

(









· Quality base material, without impurities or imperfections.

	REF	\triangle		
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	02901	SUPERPRO	10	1680
TILE SPACERS 3/32" (2 MM.) - (B- 1.000 U.)	02000	SUPERPRO	1	768

- · For large ceramic format and rectified.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
LONG TILE SPACERS 3/32" (2 MM.)-L - (B-300 U.)	02952	SUPERPRO	10	960
LONG TILE SPACERS 3/32" (2 MM.) -L -(B-1000 U.)	02972	SUPERPRO	1	378

- · For floor tiles with thin joint.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
TILE SPACERS 1/8" (3 MM.) -(B- 200 U.)	02902	SUPERPRO	10	1200
TILE SPACERS 1/8" (3 MM.) -(B- 1.000 U.)	02001	SUPERPRO	1	324

LONG TILE SPACERS 1/8" [3MM L] "REINFORCED"





- · For large ceramic format and rectified.
- · Quality base material, free from impurities and imperfections.
- · Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large format tiles in walls.

	REF	\triangle	
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-200 U.)	02953	SUPERPRO	10
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-1000 U.)	02973	SUPERPRO	1

TILE SPACER 5/32" (4MM) " REINFORCED



- · For floor tiles.
- · Quality base material, free from impurities and imperfections.
- · Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large formats.

	REF	\triangle		
TILE SPACERS 5/32" (4 MM.) -(B-200 U.)	02954	SUPERPRO	10	960
TILE SPACERS 5/32" (4 MM.) -(B-1000 U.)	02974	SUPERPRO	1	216

TILE SPACERS 3/16" [5MM]











- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
TILE SPACERS 3/16" (5 MM.) -(B-100 U.)	02903	SUPERPRO	10	960
TILE SPACERS 3/16" (5 MM.)- (B-1.000 U.)	02002	SUPERPRO	1	144



· For floor tiles.

(o)

- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
TILE SPACERS 1/4" (6 MM.) - (B- 100 U.)	02036	SUPERPRO	10	540

TILE SPACERS 9/32" (7MM)





- · For floor tiles.
- \cdot Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
TILE SPACERS 9/32" (7 MM.) -(B-100 U.)	02904	SUPERPRO	10	540

TILE SPACERS 13/32" (10MM)





- · For inductrial or rustic tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
TILE SPACERS 13/32" (10 MM.) -(B-50 U.)	02905	SUPERPRO	10	540

T-SPACERS 1/32" (1MM)





T-SPACERS 1/16" (1.5MM)





T-SPACERS 3/32" (2MM)





- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF	\triangle	
T-SPACERS 1/32" (1MM) (B-300 UN.)	02859	SUPERPRO	10

- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF	\triangle	
T-SPACERS 1/16" (1.5MM) (B-300 UN.)	02860	SUPERPRO	10

- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF	\triangle		
T-SPACERS 3/32" (2MM) (B-300 UN.)	02861	SUPERPRO	10	
T-SPACERS 3/32" (2MM) (B-1000 UN.)	02864	SUPERPRO	1	540

T-SPACERS 13/32" [10MM.]





##

<u></u>

<u>t</u>



- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.

	REF	\triangle		
T-SPACERS 1/8" (3 MM.) -(B-200 U.)	02923	SUPERPRO	10	1680
T-SPACERS 1/8" (3 MM.) -(B-1000 U.)	02063	SUPERPRO	1	



- · Ideal for "brick style" tiling and perimeters.
- \cdot Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
T-SPACERS 3/16" (5 MM.) -(B-100 U.)	02924	SUPERPRO	10	2040

- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	\triangle		
T-SPACERS 13/32" (10 MM.) -(B-50 U.)	02926	SUPERPRO	10	720

WEDGES





- · Wedges for tiling.
- · Quality base material, without impurities or imperfections.

	REF	\triangle		
WEDGES 3/16" (5MM.)- (B-250 U.)	02396	SUPERPRO	10	2400
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950	SUPERPRO	10	1500
WEDGES 5/16" (7.5MM.)- (B-250 U.)	02397	SUPERPRO	10	1800
WEDGES 5/16" (7.5 MM.)- (B- 500 U.)	02951	SUPERPRO	10	960

DISPLAY BOX



· Orders by boxes only. Contains bags.

	REF	\triangle	* '4	× / 🔯	
TILE SPACERS 1/32" (1 MM.) - (42 X 300 PC.) DISPLAY BOX	02123	SUPERPRO	42	300	32
TILE SPACERS 1/16" (1.5 MM.) - (36 X 300 PC.) DISPLAY BOX	02124	SUPERPRO	36	300	32
TILE SPACERS 3/32" (2 MM.) - (48 X 300 PC.) DISPLAY BOX	02125	SUPERPRO	48	300	32
TILE SPACERS 1/8" (3 MM.) - (42 X 200 PC.) DISPLAY BOX	02127	SUPERPRO	42	200	32
TILE SPACERS 3/16" (5 MM.) - (36 X 100 PC.) DISPLAY BOX	02130	SUPERPRO	36	100	32
TILE SPACERS 9/32" (7 MM.) - (16 X 100 PC.) DISPLAY BOX	02132	SUPERPRO	16	100	30
TILE SPACERS 13/32" (10 MM.) - (18 X 50 PC.) DISPLAY BOX	02135	SUPERPRO	18	50	32
WEDGES - 3/16" (5 MM.) - (48 X 500 PC.) DISPLAY BOX	02279	SUPERPRO	48	500	30















"TILE SPACERS" AND "T-SPACERS" NEEDED BY M² (SQ. FT.) ACCORDING TO TILE SIZE.

			SQUARE FORMATS										
	cm	10 x 10	15 x 15	20 x 20	30 x 30	33 x 33	40 x 40	45 x 45	50 x 50	60 x 60	75 x 75	80 x 80	90 x 90
	inch	4" x 4"	6" x 6"	8" x 8"	12" x 12"	13" x 13"	16" x 16"	18" x 18"	20" x 20"	24" x 24"	30" x 30"	31" x 31"	35" x 35"
X	x m ² / x10 sq.ft.	140	63	35	16	13	9	7	6	4	3	3	2
一	x m ² / x10 sq.ft.	230	103	58	26	22	15	12	10	7	5	4	3


			RECTANGULAR FORMATS												
	cm	15 x 60	15 x 90	15 x 120	20 x 40	20 x 60	20 x 80	20 x 100	25 x 100	30 x 60	30 x 90	30 x 120	40 x 80	40 x 120	45 x 90
	inch	6" x 24"	6" x 35"	6" x 47"	8" x 16"	8" x 24"	8" x 31"	8" x 40"	10" x 40"	12" x 24"	12" x 35"	12" x 48"	16" x 31"	16" x 48"	18" x 35"
X	x m ² / x10 sq.ft.	16	10	8	18	12	9	7	6	8	6	4	5	3	4
一	x m ² / x10 sq.ft.	26	18	13	29	20	15	12	10	13	9	7	8	5	6


		LARGE SPECIAL FORMATS										
	cm	100 x 150	100 x 300	120 x 120	120 x 360	150 x 150	150 x 300					
	inch	40" x 59"	40" × 118"	48" x 48"	48" x 142"	59" x 59"	59" x 118"					
X	x pz.	2	2	2	2	2	2					
	x pz.	4	4	4	4	4	4					



(o)

LEVELLING SYSTEM: CONSUMPTION

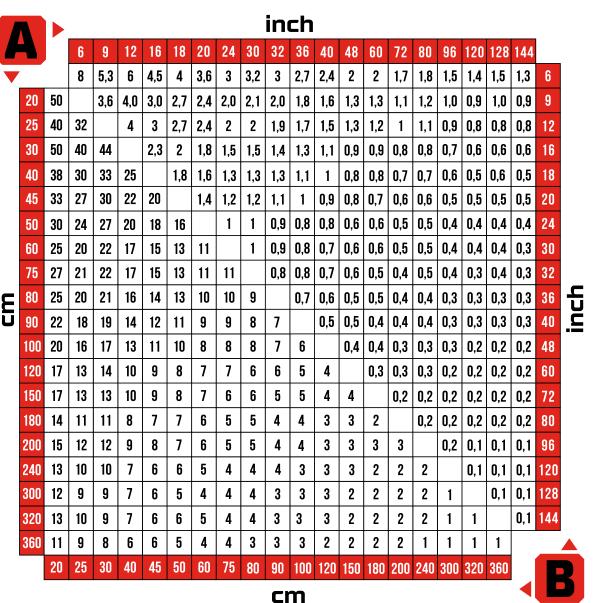





#

(o)









































SYSTEM

 System to facilitate the laying, avoid lippage and improving finishing.



- · Avoid lippage during the fixing of ceramic tiles in both floor and wall tiles.
- \cdot For tile formats from 30x30 cm (12"x12") or bigger. Always with back buttering.
- \cdot Guarantee flatness and regularity of the fixing surface.
- · Intuitive and easy to use. Results less sensitive to the user's skill.
- · Impact removal system. Always in the direction of the grout.
- · Compatible with tiles between 3 and 16mm thickness.
- · Strip made in technical polymer. System sensitive to humidity.
- · Lightweight pliers with bimaterial handle softgrip.
- · Quick and comfortable.
- · Pliers with 4 work positions. Fast thickness adjust to each tile.












曲

(o)

XX



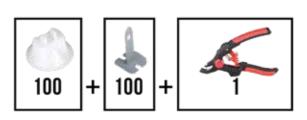

· The set consists of pliers, 100 strips and 100 reusable caps. Packaged in a handy bucket.

			REF	\triangle		
KIT TILE LEVEL QUICK			02941	PREMIUM	1	80



- · Made of technical polymer non-hygroscopic.
- · Doesn't need soaking before use.
- · The strip thickness guarantees minimum grout of 1 mm.
- · Ensures continuous tension between strips and capsgrrove.
- \cdot Grooved bases to improve the wetting of ceramic tile.

	REF	\triangle		
TILE LEVEL (B-100 U.) STRIP	02893	PREMIUM	6	180
TILE LEVEL (B-200 U.) STRIP	02894	PREMIUM	12	180
TILE LEVEL (B-400 U.) STRIP	02895	PREMIUM	6	48

TILE LEVEL QUICK CAPS










TILE LEVEL QUICK HEAVY DUTY PLIERS







	REF	\triangle		
TILE LEVEL CAPS (B-100 U.)	02890	PREMIUM	10	300
TILE LEVEL CAPS (B-400 U.)	02892	PREMIUM	8	64

· Ergonomic design with bimaterial handle. Made of very light and resistant materials. Tighten regulation system depending on the thickness of the ceramic tile.

	REF	\triangle		
TILE LEVEL QUICK PLIERS	02989	PREMIUM	1	756

- · Metal version of the plastic TLQ pliers, fully compatible.
- · Made of zinc-plated carbon steel.
- · Ergonomic bi-material handle (plastic and rubber).
- · Height adjustment with regulation screw (no tools required).

	REF	\triangle	
TILE LEVEL QUICK HEAVY DUTY NIPPER	03900	PREMIUM	1



##

























DELTA LEVEL SYSTEM: LEVELLING SYSTEM

· System to facilitate the laying, avoid lippage and improving finishing.



- · Avoids lippage during tile laying in both floor and walls.
- \cdot For tile formats from 30x30 cm (12"x12") or bigger. Always with back buttering.
- · EASY and INTUITIVE use.
- \cdot Impact removal system. ALWAYS in the direction of the grout.
- · Guarantee flatness and regularity of the laying surface.
- · Reusable wedges.
- \cdot STURDY pliers with pressure adjustment according to the tile thickness.











曲

(

t





1 mm

1.5 mm

11-20mm

11-20mm

3 mm

5 mm

13-20mm **NEW**

STRIP 6-15MM 5MM DELTA LEVEL SYSTEM

STRIP 6-15MM 5MM DELTA LEVEL SYSTEM

STRIP 11-20MM 2MM DELTA LEVEL SYSTEM

STRIP 13-20MM 5MM DELTA LEVEL SYSTEM

STRIP 11-20MM 1,5MM DELTA LEVEL

[B-400 UN]

[C-2400 UN]

[B-100 UN]

SYSTEM (B-100 UN)

(B-100 UN) **NEW**

3-12mm

3-12mm

3-12mm



- **0,5 mm** · Different models available:
 - \cdot Strip 0,5 mm / 1 mm / 1,5 mm and 2 mm. for tiles from 3 to 12 mm.
 - · Strip 1.5 mm and 2 mm for tiles from 11 to 20 mm.
 - \cdot 3 mm and 5 mm strip for tiles from 6 to 15 mm.
 - · 5 mm strip for tiles from 13 to 20 mm.

	REF	\triangle		
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-100 UN)	03929	SUPERPRO	22	352
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-200 UN)	03930	SUPERPRO	21	168
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-400 UN)	03931	SUPERPRO	13	104
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-2400 UN)	03932	SUPERPRO	1	16
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM [B-100 UN]	02850	SUPERPRO	22	352
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM [B-200 UN]	02851	SUPERPRO	21	168
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-400 UN)	02839	SUPERPRO	13	104
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-2400 UN)	02870	SUPERPRO	1	16
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-100 UN)	02840	SUPERPRO	22	352
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM [B-200 UN]	02841	SUPERPRO	21	168
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM [B-400 UN]	02842	SUPERPRO	13	104
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM [B-2400 UN]	02855	SUPERPRO	1	16
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-100 UN)	02852	SUPERPRO	22	352
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM [B-200 UN]	02853	SUPERPRO	24	192
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-400 UN)	02854	SUPERPRO	13	104
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-2400 UN)	02856	SUPERPRO	1	16
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-100 UN)	02866	SUPERPRO	20	320
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM [B-200 UN]	02867	SUPERPRO	21	168
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-400 UN)	02868	SUPERPRO	11	88
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM [B-2400 UN]	02869	SUPERPRO	1	16
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (B-100 UN)	06826	SUPERPRO	20	320
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM	06827	SUPERPRO	21	168

06828 SUPERPRO

06829 SUPERPRO

06981 SUPERPRO

02858 SUPERPRO 20

02846 SUPERPRO 20


88

16

320

320



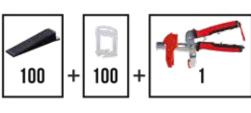



· Packaged in a handy bucket.

	REF	\triangle		
KIT DELTA LEVEL SYSTEM 1MM (3-12MM)	03956	SUPERPRO	1	80
KIT DELTA LEVEL SYSTEM 1,5MM (3-12MM)	03957	SUPERPRO	1	80
KIT DELTA LEVEL SYSTEM 2MM (3-12MM)	03958	SUPERPRO	1	80

DELTA LEVEL SYSTEM WEDGE N







- · Prevents the generation of lippage during ceramic tile installation, both in flooring and on walls.
- · Recommended for formats of 30x30 cm and above, always with back buttering.

13952	12	197
		147
13953	13	104
13954	6	48
13955	1	16
	3954	3953 13 3954 6

DELTA LEVEL SYSTEM PLIERS FAST-FIX





· FAST-FIX regulation system. Without screws,

· Protective cover on the pressure cam to avoid

· Made of steel with bi-material soft-grip

handles for greater ergonomics.

faster and intuitive.

damaging the tile.

DELTA LEVEL SYSTEM PLIERS

FAST-FIX

PATENTED



































CYCLONE LEVEL SYSTEM



 System to facilitate the laying, avoid lippage and improving finishing.



















- · A tool is not required for their installation.
- · EASY, QUICK and INTUITIVE to USE. Results less dependent on the skill and experience of the user.
- · LARGE and ERGONOMIC Cap. Does not injure fingers when tightening.
- \cdot GUARANTEES the flatness and uniformity of the installation surface.
- · System removal by IMPACT (kick or mallet). ALWAYS in the direction of the grout joint.
- · Reusable caps.
- · The base of the clip ensures continuous tension between the clip and the cap.
- · The lateral grooves at the base of the clip FACILITATE the spread of the adhesive, thus improving the adhesion of the tile.
- · Tightening adjustment system depending on the thickness of the ceramic tile.
- · Recommended for tiles with thicknesses from 3 to 18 mm.









CYCLONE CROSS BASE

CYCLONE KIT





##

(o)

XX





- · Available in various models:
- · Flat base clips of 1, 1.5, 2, 3 and 5 mm.
- · Visual thickness identification by colour

· Visual thickness identifica	ation by	colour.		
	REF	\triangle		
CYCLONE L.S. 1 MM FLAT BASE (B-100)	35937	SUPERPRO	36	12
CYCLONE L.S. 1 MM FLAT BASE (B-300)	35938	SUPERPRO	12	12
CYCLONE L.S. 1 MM FLAT BASE (B-2400)	35939	SUPERPRO	1	20
CYCLONE L.S. 1,5 MM FLAT BASE (B-100)	35940	SUPERPRO	36	12
CYCLONE L.S. 1,5 MM FLAT BASE (B-300)	35941	SUPERPRO	12	12
CYCLONE L.S. 1,5 MM FLAT BASE (B-2400)	35942	SUPERPRO	1	20
CYCLONE L.S. 2 MM FLAT BASE (B-100)	35943	SUPERPRO	36	12
CYCLONE L.S. 2 MM FLAT BASE (B-300)	35944	SUPERPRO	12	12
CYCLONE L.S. 2 MM FLAT BASE (C-2400)	35945	SUPERPRO	1	20
CYCLONE L.S. 3 MM FLAT BASE (B-100)	35946	SUPERPRO	36	12
CYCLONE L.S. 3 MM FLAT BASE (B-300)	35947	SUPERPRO	12	12
CYCLONE L.S. 3 MM FLAT BASE (C-2400)	35948	SUPERPRO	1	20
CYCLONE L.S. 5 MM FLAT BASE (B-100) NEW	35900	SUPERPRO	36	12
CYCLONE L.S. 5 MM FLAT BASE (B-300) NEW	35901	SUPERPRO	12	12
CYCLONE L.S. 5 MM FLAT BASE (C-2400) NEW	35902	SUPERPRO	1	20



- · Available in various models:
- \cdot Cross base clips of 1.5 and 3 mm.
- · Visual thickness identification by colour.

	REF	\triangle		
CYCLONE L.S. 1,5 MM CROSS BASE (B-100)	35952	SUPERPRO	36	12
CYCLONE L.S. 1,5 MM CROSS BASE (B-300)	35953	SUPERPRO	12	12
CYCLONE L.S. 3 MM CROSS BASE (B-100)	35955	SUPERPRO	36	12
CYCLONE L.S. 3 MM CROSS BASE (B-300)	35956	SUPERPRO	12	12



- The kit consists of 300 clips and 100 reusable caps.
- · Packaged in a practical bucket.

	REF	\triangle		
KIT CYCLONE 1,5 MM	35964	SUPERPRO	1	40
KIT CYCLONE 3 MM	35965	SUPERPRO	1	40
KIT CYCLONE 5 MM NEW	35903	SUPERPRO	1	

CYCLONE CROSS T BASE



- · Available in various models:
- · 1.5 and 3 mm T-base flanges.
- · Visual identification of thickness by colors.

		-		
	REF	\triangle		
CYCLONE L.S. 1,5 MM CROSS T BASE (B-300)	35959	SUPERPRO	12	12
CYCLONE L.S. 3 MM CROSS T BASE (B-100)	35961	SUPERPRO	36	12
CYCLONE L.S. 3 MM CROSS T BASE [B-300]	35962	SUPERPRO	12	12

CYCLONE CAPS







- · Reusable.
- · Special 6 mm external thread.
- · Eccentric detail for better force concentration.
- · Crowned area for better grip.
- · Dimensions: 59x59x38 mm
- · Supplied in reusable container.

	REF	\triangle		
CYCLONE CAPS (B-100)	35949	SUPERPRO	5	50
CYCLONE CAPS (B-300)	35950	SUPERPRO	4	24
CYCLONE CAPS (B-1200)	35951	SUPERPRO	1	12



RUBBLE CHUTES BUCKETS & TUBS

Rubble chutes
Plastic products for construction































REINFORCED **PLASTIC RUBBLE CHUTES** "LIGHTCHUTE"

- · Plastic rubble chutes are a safe and economical way to move rubble and other site waste from high storeys to containers at street level. Their ease of use means that they can be utilized to great effect in any building work over several storeys. Rubble
- · Ribbed interior protects against wear and tear. Greater durability.
- · Fast and easy assembly. Equipped with quick-clip system.
- · Stackable; saving space in storage and
- · Wide range of accessories.

TOP PLASTIC RUBBLE CHUTE "LIGHTCHUTE"





- · Also compatible as top Hopper or an intermediate loading point.
- · Excellent resistance to impact by deformation.

· For loading waste on lightchute chutes.

- · Higher durability.
- \cdot 6 mm thick walls with ribbed interior that protects against wear and tear.
- Equipped with 6 mm thick chains, according to DIN 763 norm.
- · Locking chain of 3 mm for intermediate chutes.
- · Fast and easy assembly. Equipped with quick-clip system.
- · Stackable for saving space.















PLASTIC RUBBLE CHUTE STANDARD SECTION "LIGHTCHUTE"





· Attaches to sections with top and side hoppers and all other chute accessories.



















- · Mounting bracket to fix top of chute to scaffold.
- · Reinforced. Holds the weight of the chutes that hang from it.
- · Easily fixes to the scaffold.
- For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.

	REF	\triangle		
CHUTE SCAFFOLD FASTENING SYSTEM	88517	PREMIUM	1	5


RUBBLE CHUTE SUPPORT BRACKET FOR BUILDINGS





- · Mounting bracket for the top of the chute column.
- · Reinforced. Holds the weight of the chutes that hang from it.
- · Easily attachable to any structural element of the building (floor frame, window, balcony, etc.) thanks to its two fixing positions.
- · Includes two clamps for ideal fastening.
- · For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.

	REF	\triangle		
RUBBLE CHUTE SUPPORT BRACKET FOR BUILDINGS	88515	PREMIUM	1	5

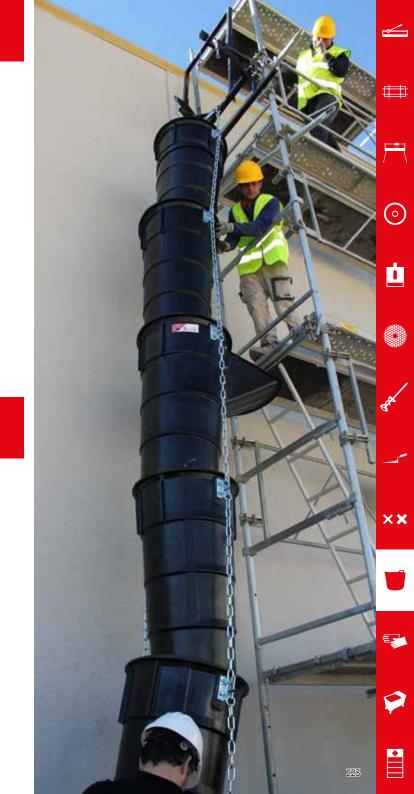





PLASTIC

BUCKETS

10. 12. 15 and 22 litres.

buckets are:

"LIGHTBUCK"

· High quality plastic buckets are an

outstanding option due to their competitive price and light weight. The range of plastic buckets includes models with capacities of

· The common characteristics of all the plastic

· Made with high quality polyethylene. Greater

· Very thick walls for maximum strength and

· Suitable for all types of work in the construction industry as well as other





























- · Greater comfort during transport. For easy waste collection.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.



"ITALIANO" PLASTIC

BUCKET (10 L.)





		~	Á

- mm

- cm

2 Lb

1 kg

PLASTIC BUCKET WITH GRADUATION "LIGHTBUCK" (12 L.)



600



- · Greater comfort during transport. For easy waste collection.
- · Embossed scale.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.







	REF	\triangle						
PLASTIC BUCKET WITH	88776	PRO	0"	0"	12.1	2 Lb	10	40n
GRADUATION (12 L.)	- cm	- cm	- mm	12 1.	1 kg	10	480	



PLASTIC BUCKET WITH GRADUATION & SPOUT "LIGHTBUCK" (15 L.)

PLASTIC BUCKET MODEL 2 "LIGHTBUCK" HANDLE EXT. (20 L.)









- · Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- · Plastic handle. Comfort.



PLASTIC BUCKET
MODEL 2 "LIGHTBUCK" 88712 PRO
HANDLE EXT. (20 L.)





14 9/16" 10 5/8"	20 I.	1.87 Lb	10	450
370 mm 27 cm	2U I.	0.85 kg	10	450



- · Greater comfort during transport. For easy waste collection.
- · Embossed scale.
- · With spout to prevent spillages when pouring.
- · With reinforced rim for greater resistance.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.



	REF	\triangle	□;					
PLASTIC BUCKET WITH GRADUATION & SPOUT (15 L.)	88775	PRO	0" - cm	0" - mm	15 I.	2.6 Lb 1.2 kg	10	360

PLASTIC BUCKET MODEL 2 "LIGHTBUCK" (22 L.)





- · Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- · Plastic handle. Comfort.



	REF	\triangle						
PLASTIC BUCKET MODEL 2 WITH PLASTIC HANDLE (22 L.)	88772	PRO	14 9/16" 370 mm	10 5/8" 27 cm	22 I.	2 Lb 1 kg	10	450



















































"FLEXTUB"

- The high quality plastic tubs are suitable for use in various industries, combine optimal resistance with good flexibility and are very lightweight. Their shape and the design of their handles means that any of the plastic tubs in this range can be carried in one hand with no risk of breakage or fatigue.
- The common characteristics of all the plastic baskets are:
- · Made with high quality polyethylene. Greater
- · Suitable for all types of work in the construction industry as well as other
- · Very thick walls for maximum strength and





- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.















	REF	\triangle	□;					
BLACK PLASTIC BUCKET NO.3 (40 L.) HEAVY DUTY	88778	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.4 Lb 1.1 kg	10	300

PLASTIC TUBS №. 1 "FLEXTUB" (25 L.)





· Greater comfort during transport. For easy waste collection.











	REF	\triangle	□;					
PLASTIC TUB BLACK COLOR №. 1 (25 L.)	88771	PRO	12" 30 cm	14 3/16" 360 mm	25 I.	1.8 Lb 0.8 kg	10	450



PLASTIC TUB №. 4 "FLEXTUB" [55 L.]









· Lightweight.



	REF	\triangle	□;	\Box				
PLASTIC TUB BLACK COLOR №. 4 (55 L.)	88774	PRO	13" 33 cm	20 7/8" 530 mm	55 I.	3.5 Lb 1.6 kg	10	200



- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.



	REF	\triangle	□;					
PLASTIC TUB BLACK COLOR №. 3 (40 L.)	88773	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB CREAM COLOR №. 3 (40 L.)	88723	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB RED COLOR №. 3 (40 L.)	88726	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB YELLOW COLOR №. 3 (40 L.)	88720	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB BLUE COLOR №. 3 (40 L.)	88721	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB GREEN COLOR №. 3 (40 L.)	88728	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB PURPLE COLOR №. 3 (40 L.)	88729	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB PISTACHIO COLOR №. 3 (40 L.)	88725	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300
PLASTIC TUB ORANGE COLOR №. 3 (40 L.)	88724	PRO	13" 33 cm	17 5/16" 440 mm	40 I.	2.9 Lb 1.3 kg	10	300



























SAFETY EQUIPMENT

Personal equipment for construction professionals







 \odot

Ċ

KNEE PADS, ERGONOMIC SEAT AND CUSHION

· Range of knee pads and ergonomic seat.





- · Protection ergonomic flexible. Adjustable elastic band fastener.
- · Professional knee pads of high comfort.
- · Inner body soft materials suitable to the user,
- · Flexible and resistant outer shell.
- · Conforms to EN14404.
- · Protection level: 1.

	REF	\triangle	
FLEX KNEE PADS	81994	PRO	6

KNEE CUSHION





- \cdot Polyurethane cushion for protecting the knees.
- \cdot Makes it easy to work on the floor without using knee pads.
- · Its wide surface allows its use as a seat.



PROFESSIONAL KNEE PADS N







- \cdot Useful for any task that requires kneeling for prolonged periods of time.
- Ideal for much more comfortable installation of tiles and flooring in general in different phases of the installation: substrate preparation, installation, grouting and cleaning.
- · LARGE SUPPORT surface area for optimal STABILITY and COMFORT.
- Double strap for keeping the knee pad tightly fitted to the leg at all times.
- · Avoids blocking of blood flow at the back of the knee.
- · Quick strap fastening.
- · In accordance with EN14404.
- · Performance level: 1.

	REF	\triangle		\square
SET OF PROFESSIONAL KNEE PADS N	66957	SUPERPRO	6	192



曲

(

XX







- · Ergonomic design professional and high comfort knee pads.
- · Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- · In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- · They incorporate two bands Neoprene closure.
- · Conforms to EN14404.
- · Protection level: 1.

	REF	\triangle		
GEL COMFORT KNEE PADS	81998	SUPERPRO	6	96



GEL DUPLEX KNEE PADS





- · Professional knee pads with ergonomic design. Highly comfortable.
- · Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- · Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- · Wide range of uses thanks to their design " two in one ":
- · Can be used together with the external rubber protection of great stability and resistance.
- \cdot With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- · They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- · Protection level: 1.

	REF	\triangle		
GEL DUPLEX KNEE PADS	81989	PREMIUM	6	96

- · Aluminium chassis high strength and stability.
- · Allows an ergonomic position of comfort.
- · Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use.
- · Robust construction with 7 heavy duty wheels.
- · Includes tray for tools and accessories.
- · Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks.
- · Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF	\triangle		
SR-1 ERGONOMIC SEAT	81999	SUPERPRO	1	18



(

XX

SAFETY EQUIPMENT

· Safety equipment for building professionals.

WHITE LENS GOGGLES





- · Field of use: basic.
- · Mechanical resistance to high speed particles, low energy.
- · Extendable in length and vertically adjustable side pieces.
- · Anti-scratch and anti-fog.
- · UV Filter.
- · Comfortable and light.
- · Conforms to EN166 and EN170

	REF	\triangle		
WHITE LENS GOGGLES	80918	SUPERPRO	12	1200

EAR PROTECTOR






- · Comfortable and effective protection for high noise environments.
- · Conforms to EN352-1.

	REF	\triangle	
EAR PROTECTOR	80903	SUPERPRO	6

LUMBAR PROTECTOR







- · With vertical reinforcement in the lower-back area.
- \cdot Side devices to adjust the pressure at the time of stress.
- · Available in 3 sizes: M. L and XL

	REF	\triangle	
LUMBAR PROTECTOR - L (37 13/16"-40 15/16") (96-104 CM)	80913	SUPERPRO	1
LUMBAR PROTECTOR - XL (40 15/16"-44 1/8") (104-112 CM)	80914	SUPERPRO	1

LATEX GLOVES





- · Ideal for wet or abrasives tasks.
- · For minimal risks only.
- · Made of 100% latex.
- · Conforms to EN420.

	REF	\triangle		
LATEX GLOVES	20907	SUPERPRO	12	3240

SET OF SMOOTH SOLES





· Increases contact by 100% approx.

	REF	\triangle	
SET OF SMOOTH SOLES	05985	SUPERPRO	18





ACCESSORIES FOR CLEANUP AND MAINTENANCE

Products and accessories for cleaning and installing ceramic tile









(o)

d

PRODUCTS FOR CLEANING

· 25 I. and 200 I. packages available on request, minimum order applies (400



· Product specially made for cleaning cement, mortar, tile cement and any limestone base substance. Also suitable for spot cleaning of efflorescence (salt) on brick walls, terraces or baked tiles etc...

	REF	\triangle	
RC-10 CEMENT REMOVER 5 L. (ONLY AVAILABLE FOR SPAIN,	7705N	SUPERPRO	ז
FRANCE, UK, ITALY & CUBA)	22/30	JUFERFRU	2


SUPERPRO SPONGES



Ref. 22928

Ref. 22929

- · PLUS models have cuts for increased drag on the dirt.
- Ref 20905 and 20906 available in Palbox

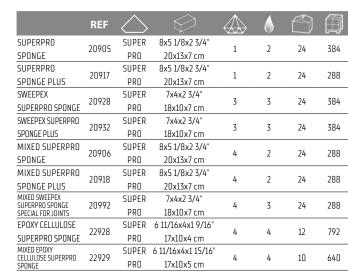



· Complete range of sponges and grout floats for cleaning and protection of tiles.













PRO SPONGES



SPONGE FLOAT SUPERPRO



##

o

<u>t</u>



- · Floats with SUPERPRO sponge for grout cleaning and
- · PLUS model has cuts for increased performance in wiping away dirt.

	REF	\triangle	\Diamond		6		
SPONGE FLOAT SUPERPRO	20924	SUPER PRO	11 1/16x7 11/16x1" 28x19.5x2.5 cm	1	2	10	180
SPONGE FLOAT SUPERPRO PLUS	20908	SUPER PRO	11 1/16x7 11/16x1" 28x19.5x2.5 cm	1	2	10	180



- · Polyurethane sponges.
- · HIDRO models are highly absorbent.

	REF	\triangle		6			
STANDARD PRO SPONGE	24966	PRO	6 11/16x4x2 3/4" 17x10x7 cm	2	1	24	720
HIGH ABSORPTION HIDRO PRO SPONGE	24967	PRO	6 11/16x4x2 3/4" 17x10x7 cm	3	3	24	720

REPLACEABLE SUPERPRO SPONGES 12" X 5 11/32" (30X13,5CM)



- · Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (Ref. 22912) and secure attachement to other brands.
- · Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachement system.
- · PLUS models have cuts for increased drag on the dirt.

	REF	\triangle			6		
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900	SUPER PRO	12x5 5/16x1 9/16" 30x13.5x4 cm	1	2	10	180
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO SPONGE	22916	SUPER PRO	12x5 5/16x1 9/16" 30x13.5x4 cm	3	3	10	180
REPLACEABLE SUPERPRO SPONGE	22910	SUPER PRO	12x5 5/16x1 9/16" 30x13.5x4 cm	1	2	10	320
REPLACEABLE SUPERPRO SPONGE PLUS	22918	SUPER PRO	12x5 5/16x1 9/16" 30x13.5x4 cm	1	2	10	320
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	SUPER PRO	12x5 5/16x1 3/16" 30x13.5x3 cm	4	4	10	
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	SUPER PRO	12x5 5/16x1 3/16" 30x13.5x3 cm	3	3	10	320
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	SUPER PRO	12x5 5/16x1 9/16" 30x13.5x4 cm	3	3	10	320









HANDLE FOR INTERCHANGEABLE SPONGES AND FOAMS



RUBBER FOAM SUPERPRO FLOAT REPLACEMENTS







- · Rubber foam sponges basis for finishing and final cleanings, adaptable to ergonomic handle (Ref. 22912)
- · Available with different hardness and abrasiveness rubber-foam.

100001111			
	REF	\triangle	

22924 SUPERPRO

- \cdot Polyurethane foam floats with high absorption.
- The PLUS model has slits for increased performance drag dirt.

	REF			6			
SPONGE FLOAT PRO	24974	PRO	11 1/16x5 1/2x1 3/16" 28x14x3 cm	3	3	10	240
SPONGE FLOAT PRO PLUS	24988	PRO	11 1/16x5 1/2x1 3/16" 28x14x3 cm	3	3	10	240

\cdot Adaptable to 12" x 5 11/32" (30 x 13.5 cm.)

 \cdot and 13 13/32" x 6 3/4" (34 x 17 cm.) SUPERPRO sponges and foam replacements.

	REF	\triangle	
HANDLE FOR INTERCHANGEABLE SPONGES	77917	CHUEDDO	10
AND FOAMS	22912	SUPERPRO	10

RUBBER FOAM PLASTIC HANDLE SUPERPRO FLOATS







- · Ergonomic plastic handle.
- · Different types of rubber foam and hardness, depending on the type of finish.



	REF	\triangle	\Diamond		
RUBBER FOAM BIG CELL SOFT-L SUPERPRO FLOAT	72985	SUPERPRO	10x4 5/16x9/16" 25x11x1.5 cm	6	540
RUBBER FOAM MEDIUM CELL SOFT-M SUPERPRO FLOAT	72986	SUPERPRO	10x4 5/16x9/16" 25x11x1.5 cm	6	540
RUBBER FOAM SMALL CELL HARD-S SUPERPRO FLOAT	72988	SUPERPRO	10x4 5/16x9/16" 25x11x1.5 cm	6	540

RUBBER FOAM PRO FLOAT

REPLACEMENT RUBBER FOAM

BIG CELL SOFT-L SUPERPRO



10

12x5 5/16x3/8"

30x13.5x1 cm



· For finishing and final cleaning of surfaces.

	REF	\triangle			
COARSE RUBBER FOAM PRO FLOAT 11 1/32" X 5 1/2" (28 X 14 CM.)	24971	PRO	11 1/16x5 1/2x13/16" 28x14x2 cm	10	360
FINE RUBBER FOAM PRO FLOAT 11 1/32" X 5 1/2" (28 X 14 CM.)	24973	PRO	11 1/16x4 3/4x13/16" 28x12x2 cm	10	360



(O)

SUPERPRO SPONGE WITH BASE FOR WASHBOY



##

(o)

t

XX







- · Large area reinforced base.
- · Handle included (Ref.70904).
- · Polyurethane Sponge.

	REF	\triangle			6		
SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20914	SUPER PRO	13 3/8x6 11/16x1 15/16" 34x17x5 cm	3	3	1	168
REPLACEMENT SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20919	SUPER PRO	13 3/8x6 11/16x1 15/16" 34x17x5 cm	3	3	1	

- · To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- · Float with three very stuff pads (white).
- · 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown).
- · Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).

	REF	\triangle		
FLOAT + 3 MIXED PADS	20900	SUPERPRO 2	10x4x1" ?5x10x2.5 cm	1
FLOAT + 3 VERY SOFT PADS	20944	SUPERPRO 2	10x4x1" ?5x10x2.5 cm	1
3 PADS REPLACEMENT SET - VERY SOFT	20971	SUPERPRO 2	10x4x1" ?5x10x2.5 cm	1
3 PADS REPLACEMENT SET - MEDIUM	20973	SUPERPRO 2	10x4x1" 25x10x2.5 cm	1
3 PADS REPLACEMENT SET - HARD	20974	SUPERPRO 2	10x4x1" 25x10x2.5 cm	1
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902	SUPERPRO _	10x4x1" 25x10x2.5 cm	1

STANDARD SWEEPEX | HIDRO CELLULOSE ABRASIVE













SWEEPEX® is a registered trade mark.









##

(o)

WASHBOYS

 Different model of washboys for cleaning away grout or final clean of Tiling job.



- · Consisting of:
- · RUBICLEAN PRO washboy (Ref. 25949).
- · Sponge float PRO (Ref. 24974).
- · Grout float PRO 11"x5"x13/32" (28x14x1cm) (Ref. 24969).

	REF	\triangle		
RUBICLEAN PRO 1 SET	68902	PRO	1	18

RUBICLEAN PRO







- · Wheels built into the base.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 3.7 gl. (17 l.)
- Dimensions: 20 1/2" x 10 5/8" x 10 1/4" (52 x 27 x 26 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 12 units (Ref. 69948).

		,			
	REF	\triangle			
RUBICLEAN PRO WASHBOY	25949	PRO	1	18	

RUBICLEAN PRO 2 SET



- · Consisting of:
- · RUBICLEAN PRO washboy (Ref. 25949).
- · Float with replaceable SWEEPEX SUPERPRO sponge (Ref. 22916).
- · Rubber grout float SUPERPRO (Ref. 65971).
- · 45° Notched trowel 11" (28 cm) 13/32"x13/32" (10x10) (Ref. 75948).

	REF	\triangle		
RUBICLEAN PRO 2 SET	69949	PRO	1	18



XX



RUBICLEAN EASYPRO

RUBICLEAN SUPERPRO



曲

(

XX



- · Lightweight, strong plastic bucket.
- · Lower grate level. Requires less water. More lightweight.
- · Removable rollers. Easier cleaning.
- \cdot Metal reinforcement on the rollers. Greater resistance.
- · Capacity 24 litres.

	REF	\triangle		
RUBICLEAN EASYPRO WASHBOY	21945	PRO	4	24



- · Plastic washboy, light and heavy duty, with two squeeze rollers and separation-decantation system of sewage.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. [24 l.]
- · Useful capacity: 4.2 gl. (19 l.)
- Dimensions: 20 1/2" x 10 5/8" x 12" (52 x 27 x 30 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 10 units (Ref. 69964).

	REF	\triangle		
RUBICLEAN SUPERPRO WASHBOY	21998	SUPERPRO	1	18

RUBICLEAN TRIPLE SUPERPRO











- Equipped with 3 spiral rollers for further draining.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" [53 x 28 x 37 cm].
- · Supplied assembled and in 1 unit box.

	REF	\triangle		
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	SUPERPRO	1	18







- · Consisting of:
- · RUBICLEAN SUPERPRO washboy (Ref. 21998).
- · Sponge float SUPERPRO (Ref. 20924).
- · Termoflex rubber grout float SUPERPRO (Ref. 65976).

	REF	\triangle		
RUBICLEAN SUPERPRO 2 SET	69915	SUPERPRO	1	18



PAL BOX AND DISPLAYS

Index by references







RUB

SPONGE
































- · Contains x135 units of ref. 20905.
- \cdot Dimensions: 23" x 15" x 47" [60 x 40 x 120 cm].

BUILDING THE FUTURE TOGETHER





- · Contains x135 units or ref. 20906.
- \cdot Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).





- · Contains x160 units of ref. 24967.
- · Dimensions: 23" x 15" x 42" (60 x 40 x 105 cm).

	REF	\triangle	
HIDRO PRO SPONGE PALBOX	69979	PRO	1



#

<u></u>

<u>t</u>

XX





- · Contains x10 units of Ref. 21998.
- · Washboys are NOT supplied assembled.
- · Dimensions: 22" x 12" x 42" (56 x 31 x 109 cm).

	REF	\triangle	
RUBICLEAN SUPERPRO TRAY PALBOX	69964	SUPERPRO	1



- · Contains x12 units of Ref. 25949.
- · Washboys are NOT supplied assembled.
- · Dimensions: 22" x 12" x 42" (56 x 31 x 109 cm).

	REF	\triangle	
RUBICLEAN PRO TRAY PALBOX	69948	PRO	1



- · Ready to use by just removing the cover.
- · It contains:
- · 20 DELTA Levelling System kits.
- · Measurements: 60 x 40 x 105 cm.

	REF	\triangle		
DELTA LEVELLING SYSTEM 1MM PAL BOX (20 UN.)	03917	SUPERPRO	1	2
DELTA LEVELLING SYSTEM 1,5MM PAL BOX (20 UN.)	03918	SUPERPRO	1	2
DELTA LEVELLING SYSTEM 2MM PAL BOX (20 UN.)	03919	SUPERPRO	1	2






DISPLAYS

 Various display units to show RUBI products, optimizing space available and helping to promote sales.



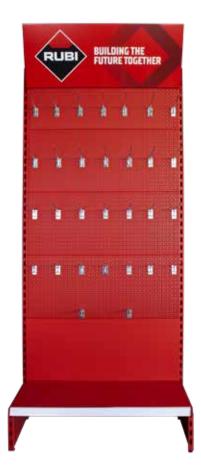



NEW

- · 1-metre wide general display stand.
- · With a frame, stand and display tray. (Ref. 90811).
- · With two display bar units. (Ref. 90810).
- · If you want to set up multiple displays, calculate the number of bars you will need.

	REF	
STRUCTURE + CARTELA + GENERAL DISPLAY TRAY 1000 MM	90811	1
2 UN. GENERAL DISPLAY BARS	90810	1

NEW

- · 65-centimetre wide general display stand.
- · With a frame, stand and display tray. (Ref. 90812).
- · With two display bar units. (Ref. 90810).
- · If you want to set up multiple displays, calculate the number of bars you will need.

	REF	
STRUCTURE + CARTELA + GENERAL DISPLAY TRAY 650 MM	90812	1
2 UN. GENERAL DISPLAY BARS	90810	1























GENERAL DISPLAY TRAY ACCESSORY



HOOK BRICK TROWELS



NEW

NEW

· Tray accessory for general display stand.

	REF	
TRAY GENERAL DISPLAY 40" (1000 MM.)	90570	1
TRAY GENERAL DISPLAY 25" (650 MM.)	90571	1

NEW

 Palette hook accessory for placement in general display stand.

	REF	
HOOK BRICK TROWELS	93140	1


GENERAL DISPLAY CAGE ACCESSORY



· Grid accessory for general display stand.

	REF	
CAGE GENERAL DISPLAY 40" (1000 MM.)	90606	1
CAGE GENERAL DISPLAY 25" (650 MM.)	90607	1

HOOK WITH PRICE TAG

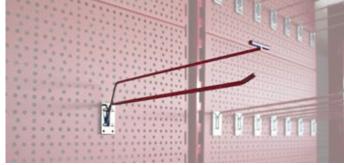

NEW

 Price hook accessory for placement on general display stand.

	REF	
HOOK WITH PRICE TAG	90656	1





• Display stand to hold two mixers and various mixing paddles.

	REF	
DISPLAY FOR MIXERS	91908	1



##

o

<u>t</u>

XX







##











××













· Desktop dispenser display with six hooks for hanging

REF

91907

· With front bar and key locking for anti-theft security.

4DRILL bits of different diameters.

DISPLAY FOR 4DRILL BITS







· With front bar and key locking for anti-theft security.

· capacity: 36 blades 4 1/2", 5" (115mm,125mm).

	REF	
DISPLAY FOR DIAMOND BLADES	92854	1



NEW

· Table-top metal dispenser for drill bits. It incorporates an anti-theft system.

	REF	
PREMIUM DRILL BITS DESKTOP DISPLAY	93800	1









NEW

- Metal display stand with the capacity to display a manual cutter.
- \cdot It incorporates an anti-theft system.

	REF	
MANUAL CUTTERS RACK (1 FACE)	93138	1

 \cdot Capacity to display 3 manual tile cutters.

	REF		
DISPLAY FOR MANUAL CUTTERS.	90305	1	6

NEW

· Cardboard dispenser display for the levelling range.

	REF	
DISPLAY RANGE LEVELING	93056	1

XX

##

⊙



0

INDEX BY REFERENCE

REF	PAGE	REF	PAGE	REF	PAGE	REF	PAGE	REF	PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE	REF PAGE
01900	57	02868	217	04919	141	05985	232	14982	41	20900 239	25900 180	30955 127	35518 181	50936 137	54844 107	62973 154	66904 195	72909 178	76809 181	82980 199
01901	58	02869	217	04920	140	05988	137	14985	43	20902 239	25901 180	30956 127	35520 181	50937 142	54911 99	62974 154	66905 194	72910 178	76907 167	82986 198
01903	57	02870	217	04921	140	05989	137	14986	43	20905 236	25902 180	30958 127	35900 219	50938 137	54913 99	62975 154	66906 194	72911 178	76917 169	83942 201
01906	59	02890	215	04922	140	05990	137	14987	43	20906 236	25903 180	30959 127	35901 219	50939 110	54914 99	62976 154	66907 194	72915 176	76918 169	83992 185
01907	56	02892	215	04923	140	05991	137	14988	41	20907 232	25905 180	30960 127	35902 219	50944 137	54918 70	62977 155	66924 196	72919 178	76919 169	83993 185
01945	59	02893	215	04924	140	05992	137	14989	41	20908 237	25906 180	30961 127	35903 219	50947 142	54975 101	62986 155	66929 85	72941 192	76920 206	83998 185
01946	59	02894	215	04927	141	05994	137	14990	41	20914 239	25907 180	30962 127	35937 219	50953 71	54976 101	65450 188	66940 191	72953 192	76922 206	83999 185
01947	59	02895	215	04928	141	06826	217	15901	47	20917 236	25910 121	30963 127	35938 219	50956 111	54977 101	65900 194	66941 191	72954 168	76923 206	84924 185
01948	60	02901	209	04929	141	06827	217	15902	47	20918 236	25912 126	30964 127	35939 219	50957 111	54991 106	65904 194	66942 191	72960 189	76924 206	84925 185
01949	55	02902	209	04962	136	06828	217	15904	47	20919 239	25913 126	30972 122	35940 219	50958 111	54993 106	65905 194	66952 195	72961 189	76926 206	85902 159
01950	56	02903	209	04963	140	06829	217	16900	67	20924 237	25915 120	30973 122	35941 219	50959 111	54999 107	65907 189	66957 230	72980 85	76927 206	88515 223
01958	59	02904	210	04964	136	06900	138	16901	112	20928 236	25916 120	30974 120	35942 219	50962 114	55903 101	65908 194	68902 241	72985 238	76929 206	88517 223
01959	56	02905	210	04965	136	06915	138	16908	71	20932 236	25917 121	30976 120	35943 219	50964 115	55905 101	65919 188	68923 137	72986 238	76930 206	88553 194
01960	60	02911	208	04970	140	06918	138	16909	79	20944 239	25918 121	30986 121	35944 219	50994 111	55906 101	65925 201	69915 241	72988 238	76931 206	88555 194
01991	57	02912	208	04971	140	06919	138	16946	113	20971 239	25925 103	30987 121	35945 219	50996 137	55907 101	65926 201	69948 245	73909 188	76932 206	88712 225
01992	57	02923	211	04972	140	06929	138	16956	112	20973 239	25927 103	30995 124	35946 219	50998 115	55938 101	65933 169	69949 241	73911 188	76933 206	88720 227
01993	57	02924	211	04973	140	06971	138	16957	113	20974 239	25934 126	30997 124	35947 219	50999 115	55939 101	65934 169	69955 244	73912 188	76934 206	88721 227
01995	58 58	02926 02941	211	04974	140	06972 06973	138	16958	113	20992 236	25940 164 25942 164	31906 129 31909 129	35948 219 35949 219	51908 142	56937 97 56938 97	65935 187 65939 169	69957 244	73913 188 73914 188	76935 206 76937 207	88723 227
01996			215	04975	140		138	16984	113	21931 83				51914 107			69964 245			88724 227
02000	209	02950 02951	211	04976 04977	140 140	06974 06975	138 138	16985 17905	113 31	21945 240 21951 85	25943 165 25944 164	31915 121 31932 122	35950 219 35951 219	51915 106 51916 107	56939 97 56940 105	65940 196 65942 193	69979 244 70902 188	73973 176 74936 178	76938 207 76939 207	88725 227 88726 227
				04977	140	06976	138	17905	31	21955 79	25944 164 25945 103	31932 122 31933 122	35952 219	51916 107 51927 106	56941 97	65943 230	70902 188 70904 188		76940 169	
02002	209	02952 02953	209	04992	136	06977	138	17909	29	21975 83	25946 165	31934 122	35953 219	51929 138	56942 105	65946 196	70905 187	74937 178 74938 178	76940 167	88728 227 88729 227
02030	208	02954	209	04995	136	06978	138	17915	29	21975 240	25949 241	31935 122	35955 219	51931 138	56943 97	65950 176	70916 199	74940 178	76942 167	88760 222
02036	210	02734	209	05917	148	06979	138	17921	29	21998 240	25955 52	31936 128	35956 219	51937 138	56947 97	65951 179	70917 199	74941 178	76943 167	88765 222
02063	211	02973	209	05918	148	06980	138	17924	27	22900 237	25956 52	31937 128	35959 219	51939 138	56949 97	65954 187	70918 199	74942 178	76945 168	88770 224
02123	211	02773	209	05919	148	06981	217	17951	27	22910 237	25963 103	31938 128	35961 219	51941 116	57903 137	65957 189	70924 199	74947 176	76946 168	88771 226
02124	211	02989	215	05920	148	10607	186	17952	27	22912 238	26570 159	31939 128	35962 219	51957 71	57904 137	65958 176	70925 192	74948 176	76947 178	88772 225
02125	211	03900	215	05921	149	11900	35	17953	27	22914 237	26571 159	31964 150	35964 219	51959 71	57906 137	65959 176	70926 193	74980 178	76971 168	88773 227
02127	211	03901	217	05922	149	11901	37	17954	27	22916 237	26970 161	31965 150	35965 219	51961 71	57907 137	65960 176	70928 193	74982 178	76972 168	88774 227
02130	211	03917	245	05923	139	11973	35	18819	79	22918 237	26971 161	31966 128	37116 182	51969 73	57908 137	65962 189	70929 193	75012 181	76973 168	88775 225
02132	211	03918	245	05924	139	11974	37	18879	70	22922 237	26972 161	31967 128	37118 182	51979 73	57991 106	65963 189	70930 61	75014 181	77116 182	88776 224
02135	211	03919	245	05926	139	12923	60	18910	77	22924 238	26973 161	31969 128	37258 182	51989 117	58850 108	65966 179	70964 208	75418 181	77118 182	88778 226
02279	211	03929	217	05927	139	12954	35	18913	71	22928 236	26974 161	31972 123	37314 182	51997 117	58851 108	65967 179	70965 207	75420 181	77258 182	90305 249
02396	211	03930	217	05928	139	12955	37	18914	58	22929 236	26975 161	31973 123	37316 182	52905 97	58852 108	65968 179	71896 198	75901 207	77268 182	90570 247
02397	211	03931	217	05929	139	12956	35	18917	70	22932 237	26980 163	31974 152	37318 182	52906 97	58853 108	65970 186	71898 198	75902 207	77314 182	90571 247
02839	217	03932	217	05939	139	12957	37	18919	85	22950 236	26981 163	31975 123	37520 183	52915 97	58854 108	65971 186	71899 198	75904 207	77316 182	90606 247
02840	217	03952	217	05961	141	12981	50	18920	39	24949 164	27913 159	31978 123	38416 183	52916 97	58856 108	65972 186	71904 187	75905 207	77318 182	90607 247
02841	217	03953	217	05962	141	13939	45	18921	39	24956 103	28900 85	31979 152	40910 129	52918 97	58863 108	65973 186	71923 177	75909 207	77320 182	90656 247
02842	217	03954	217	05963	141	13940	45	18922	39	24958 164	30882 121	31982 121	40911 129	52920 93	60202 170	65975 186	71924 177	75913 181	77418 183	90810 246
02846	217	03955	217	05964	141	13941	45	18923	39	24966 237	30883 121	32908 124	40913 128	52927 97	60265 170	65976 186	71925 177	75923 179	77923 178	90811 246
02850	217	03956	217	05965	141	14907	33	18934	80	24967 237	30888 121	32921 151	40914 128	52928 97	60926 83	65980 202	71926 177	75924 179	79050 183	90812 246
02851	217	03957	217	05966	141	14908	33	18935	81	24968 186	30900 125	32927 151	40915 123	52929 95	60991 192	65981 202	71941 185	75925 193	80903 232	91907 248
02852	217	03958	217	05967	141	14909	33	18948	84	24969 186	30902 125	32931 151	40916 123	52930 93	60993 208	65982 176	71943 185	75946 179	80913 232	91908 247
02853	217	04904	141	05969	141	14943	49	18959	69	24971 238	30904 122	32932 123	40917 125	52937 95	60994 208	65983 176	71944 185	75947 179	80914 232	92854 248
02854	217	04909	141	05970	139	14944	49	18972	39	24973 238	30925 127	32933 123	40918 125	52940 93	60996 177	65984 176	71954 197	75948 179	80918 232	93056 249
02855	217	04910	137	05971	139	14945	49	18974	39	24974 238	30926 127	32934 129	41900 124	52942 93	60997 177	65985 176	71967 170	75950 177	80933 193	93138 249
02856	217	04911	137	05972	196	14946	49	18975	39	24984 51	30929 127	32935 129	41901 124	52960 95	60998 192	65988 176	71969 170	75955 177	81989 231	93140 247
02858	217	04912	137	05973	106	14947	49	18976	76	24985 51	30930 127	32936 129	45910 102	52961 95	61974 155	65989 176	71970 201	75957 177	81994 230	93800 248
02859	210	04913	137	05974	106	14948	49	18978	84	24986 164	30931 127	32937 151	45911 102	52962 95	61975 155	65990 202	71971 201	75958 177	81998 231	
02860	210	04914	137	05976	142	14975	43	18979	79	24988 238	30945 126	32938 151	45915 102	52970 95	61976 155	66810 192	71974 189	75959 177	81999 231	
02861	210	04915	137	05978	141	14976	43	18980	60	24994 166	30946 126	32939 151	45916 102	52971 95	61977 155	66811 192	72824 187	75962 176	82960 200	
02864	210	04916	137	05979	141	14977	43	18982	75	24995 166	30949 126	32940 120	50903 140	52972 95	62970 154	66812 192	72906 178	75965 197	82961 200	
02866		04917	137	05981	141	14980	41	18983	78	24996 166	30950 126	32971 126	50917 137	53500 116	62971 154	66813 192	72907 178	75970 177	82963 200	
02867	217	04918	140	05982	141	14981	41	18984	82	24998 166	30951 126	32974 126	50921 142	54822 116	62972 154	66900 195	72908 178	76808 181	82964 200	

SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:



Fase 1: Preparación

Fase 2: Corte y Perforación

Fase 3: Instalación



Fase 4: Rejuntado



Fase 5: Limpieza



3+1 years warranty



3+2 years warranty



3 year warranty



Patented



Patent Pending



Patent Pending



Units per pallet



Units per box



Cutting length



Diagonal cutting length



Cutting height Separator power




Net weight without packaging



Gross weight



Weight with carrying case



Power supply





strokes

effect

With blade

Outside diameter

Inside diameter

Disc segment high

Segment Thickness

Diamond band height

Diamond band width

Maximum drill length

Max Height of the head

Rod's head diametre

Wide notched trowel

Notched height trowel

Notched Radius Trowel

Trowel length

Trowel width

Mixing capacity

Mitre cutting length

Mitre Thickness cut

Maximum cutting

thickness - 1 stroke or 2

Length Width Height

(machine overall

Wall chaser effect

Cut length with saw

dimensions)



№ tile spacers per bag

Bags per box



Top diameter

Useable height

Sponge size

[1-4]

Cutting Length

Cutting height

Separator power

Fixed separator

Mobile separator

Repetitive cuts

Base accessory

Angular measuring

Dual reinforced guide

PURE POWER

Smart Power

MAGNET

45° cuts

Absorption level (1-4)

Resistance to abrasion

Bottom diameter





Easy fix

INCH/MM. ruler

One Hand Action

Back pack optional

Bearing system

















1 hour of continous work maximum, recommended 3 hours of continous work



maximum, recommended 6 hours of continous work maximum, recommended by TNO



Laser



C3 system



Wet cutting Dry cutting



Motor Brushless



LI-ION BATTERY



CORDLESS ALLIANCE SYSTEM





temperatures Hardness and Robustness

Resistant to extreme



Easy



Metallic



Reinforced handle



Flexible



Comfort



Reinforced



Strong







Light Easy use



Reduced dust and noise





Rubi Group comply with the Directive 2002/96/ EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. (WEEE, WEEE, ECORAEE, etc...) (RoHS).

Images are for illustration purposes and may change

*The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

**Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law.

Note: Any reproduction of all or part of this catalogue without prior approval of Germans Boada, SA is forbidden



European Regulatory Commission



Russian legislation EAC



Normativa UK

TÜV safety rules









UK: Ref. 93166









曲

 \odot

XX





RUBICLUB

JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE ART OF TILING

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

SCAN THE OR CODE OR ENTER WWW.RUBI.COM





After Sales Service F 🕞 💆 🧿 in aftersales@rubi.com rubi.com





RUBI GROUP

GERMANS BOADA, S.A. BARCELONA (OFICINAS CENTRALES)

Avda. Olimpíades 89-91, P.O.BOX 14 08191 RUBI (Bacelona) SPAIN

MADRID

28521 Rivas Vaciamadrid SPAIN

RUBI PORTUGAL

F. 351 239 492 431

RUBI FRANCE S.A.R.L.

15 Avenue du Hoggar Bâtiment le Vancouver 91940 LES ULIS - FRANCE T. 33 1 69 18 17 85 T. 33 1 69 18 17 89

RUBI TOOLS USA Inc. US

10702 NW 147th Street, Suite 100 P. 1 305 715 9892 F. 1 305 715 9898

RUBI UK LTD.

Units 16 & 17. Easter Park. ΙE Ferry Lane RM13 9BP - UNITED KINGDOM P. 44 (0) 1708559609 F. 44 (0) 1708553813

RUBI POLSKA Sp. z o.o.

T. +48 (0) 226 44 51 61 F. +48 (0) 226 44 58 45

RUBI BENELUX BV

LU 4824 AS BREDA BE

RUBI DEUTSCHLAND GmbH

Krahnendonk 89 41066 Mönchengladbach T. 49 (0) 2161 990 60 90 F. 49 (0) 2161 478 12 69

RUBI ROSSIA RU

моб. +7 903 153 30 46 тел.: +34 936806500 факс: +34 936806501

RUBI CANADA

P. 1866 898 7924 F. 1305 715 9898

ITALIA

T. 800 788278 F. 800 788279 Suzhou Rubi Technologies Co. ,Ltd.

Block 2, No.86, Tinghe Road, SIP, Suzhou City, Jiangsu, Province, China Zip Code: 215121 中国江苏省苏州工业园区亭和路86号2号厂房 苏州瑞比机电科技有限公司 邮政编码: 215121 Tel: 86 512 66626100

RUBI INDIA

Andheri Kurla Road, Andheri (East) Mumbai-400059, India

Cra. 11a #94-56, Oficina 501 Bogotà D.C. COLÒMBIA T. (+571) 749 85 08

RUBI COLOMBIA

RUBI CHILE

Los Militares # 5620, Oficina 1503

RUBI MIDDLE EAST

Al Fattan Currency House-Tower 1.

GERMANS BOADA MEXICO

Av. Industria Moderna #2001 Bodega 82, El Cerrito, CP 76240

RUBI TURQUIA

TAMER OZALLI Hırd. Hizm. Fulya Mah: Mehmetcik cad Kozacık sok

